




THE HAND'O'LOCK QUICK COUPLER ALLOWS THE FAST REPLACEMENT OF THE ATTACHMENT TOOLS. THANKS TO ITS SIMPLE AND STRONG FRAME IT CAN RELY ON AN EXCELLENT QUALITY-PRICE RATIO. IN ITS HYDRAULIC VERSION WITH ITS **DOUBLE ACTION** SYSTEM, IT ENABLES THE FULLY AUTOMATIC LOCKING AND UNLOCKING OPERATIONS.

**MECHANIC**

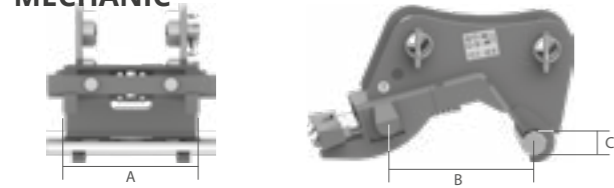

		0,6 - 1,2 (1323 - 2646)	0,6 - 4,0 (1323 - 8818)	4,0 - 10,0 (8818 - 22046)
<b>MOD.</b>		<b>CW 00</b>	<b>CW 05</b>	<b>CW 10</b>
<b>A</b>	MM (IN)	144 (5,7)	175 (6,9)	305 (12)
<b>B</b>	MM (IN)	150 (5,9)	200 (7,9)	300 (11,9)
<b>C</b>	MM (IN)	30 (1,2)	40 (1,6)	50 (2)
	KG (LB)	10 (22)	14 (31)	42 (93)

W/O COUPLER

**HYDRAULIC DOUBLE ACTION**



		0,6 - 4,0 (1323 - 8818)	4,0 - 10,0 (8818 - 22046)	7,5 - 15,0 (16535 - 33069)	15,0 - 25,0 (33069 - 55116)
<b>MOD.</b>		<b>CW 05 D.E.</b>	<b>CW 10 D.E.</b>	<b>CW 20S D.E.</b>	<b>CW 20 D.E.</b>
<b>A</b>	MM (IN)	175 (6,9)	305 (12)	420 (16,5)	550 (21,6)
<b>B</b>	MM (IN)	200 (7,9)	300 (11,9)	475 (18,7)	475 (18,7)
<b>C</b>	MM (IN)	40 (1,6)	50 (2)	60 (2,3)	60 (2,3)
	KG (LB)	15 (33)	43 (95)	110 (242,5)	180 (396,8)
	bar (psi)	250 (3626)	250 (3626)	250 (3626)	250 (3626)

W/O COUPLER  
MAX

ON REQUEST



**OPTIONAL**

- 1 HYDRAULIC INSTALLATION KIT**  
WITH THE HYDRAULIC QUICK COUPLER THE INSTALLATION KIT CAN BE PROVIDED, INCLUDING SOLENOID VALVE AND ELECTRIC SWITCH WITH MAGNETS TO EASILY PUT IT INSIDE THE CAB
- 2 LIFTING HOOK**  
A HOOK APPROVED FOR LIFTING OPERATIONS CAN BE WELDED DIRECTLY ON THE QUICK COUPLER.
- 3 CW ON HINGE**  
RECOMMENDED APPLICATION ON BUCKETS.
- 4 CW FOR TILTING BUCKETS**  
RECOMMENDED APPLICATIONS ON TILTING BUCKETS.
- 5 REVERSE CW**  
RECOMMENDED APPLICATION ON FLAT PLATES, SUCH AS ADAPTER PLATES, MULCHERS, SHEARS, ETC.
- 6 REVERSIBLE CW**  
RECOMMENDED APPLICATIONS ON BUCKETS USED IN BACK OR FRONT DIGGING WORKS.