
















PARTICULARLY SUITABLE FOR HEAVY WORKS. IT IS EQUIPPED WITH A WASTE COLLECTION TANK WITH REVERSIBLE AND AND WITH BOLT-ON REVERSIBLE CUTTING EDGE. SWEEPING ROLL ADJUSTABLE HEIGHT.

			MOD.	SPZ120		SPZ140		SPZ160		SPZ180		SPZ210		SPZ230	
為面	D	E A	MM (IN)	1200	(48)	1400	(55)	1600	(63)	1800	(71)	2100	(83)	2300	(91)
		В	MM (IN)	1320	(52)	1550	(61)	1750	(69)	1950	(77)	2250	(89)	2450	(96)
<u> </u>	A	C	MM (IN)	930	(37)	1390	(55)	1390	(55)	1390	(55)	1390	(55)	1390	(55)
	В	D	MM (IN)	475	(19)	625	(25)	625	(25)	625	(25)	625	(25)	625	(25)
	7	Е	MM (IN)	600	(24)	860	(34)	860	(34)	860	(34)	860	(34)	860	(34)
	W/O COUPLER		KG (LB)	190	(418)	300	(661)	330	(728)	360	(794)	415	(915)	450	(992)
	FULL-LOAD		L (GAL)	80	(21)	380	(100,4)	440	(116,2)	490	(129,4)	570	(150,6)	630	(166,4)
ØØ			MM (IN)	450	(18)	550	(22)	550	(22)	550	(22)	550	(22)	550	(22)
0			N.	24 + 2		28 + 2		32 + 2		37 + 2		43 + 2		48 + 2	
4			L/MIN (GAL/ MIN)	50	(13)	50	(13)	50	(13)	60	(16)	70	(19)	70	(19)
Q	MAX		BAR (PSI)	180		180	(2611)	180	(2611)	180	(2611)	180	(2611)	180	(2611)

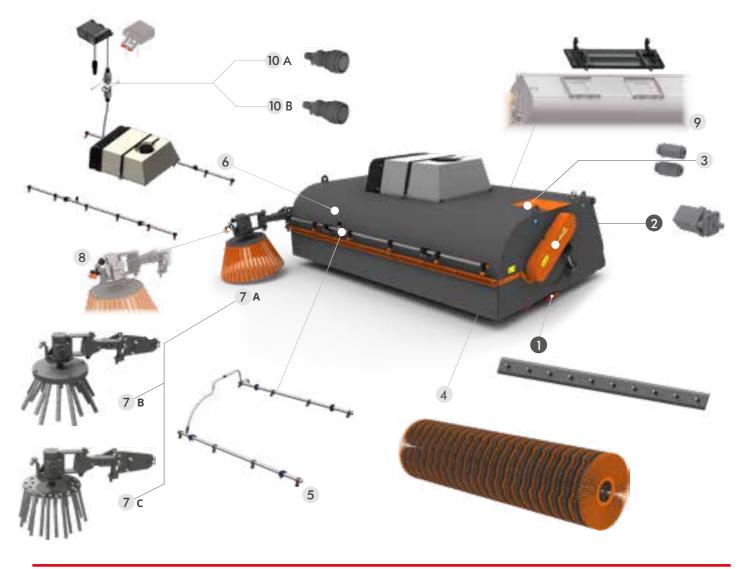

STANDARD TECHNICAL FEATURES

- **1** BOLT-ON REVERSIBLE HB400 CUTTING EDGE (SPZ120 EXCLUDED)
- ENGINE WITH SQUARE FLANGES AND DISK GEARBOX

OPTIONAL

3 FLOWRATE REDUCERS

MANDATORY ON HIGHFLOW MACHINES OR WITH OILRATE HIGHER THAN 70 L/MIN.

4 PPL + STEEL BRUSH

FOR PARTICULARLY ABRASIVE SURFACES. (SPZ120 EXCLUDED).

5 INSIDE AND OUTSIDE SPRINKLERS

THE KIT DOES NOT INCLUDE THE WATER TANK AND THE PRESSURE WATER PUMP. IT CAN BE EMPLOYED ONLY WHEN THE MACHINE ITSELF IS EQUIPPED WITH A WATER TANK. (ONLY EXTERNAL ON SPZ120)

DUST-CONTROL SYSTEM WITH TANK AND PUMP

PRESSURIZED WATER SYSTEM WITH TANK FOR THE CONTROL OF DUSTS PRODUCED DURING THE WORKING CYCLE. SPRINKLERS ARE POSITIONED INSIDE AND OUTSIDE THE SWEEPER. (ONLY EXTERNAL ON SPZ120)

7 PPL BRUSH (A) STEEL BRUSH + RUBBER PLATE (B) STEEL BRUSH + STEEL PLATE (C) (SPZ120 EXCLUDED) INDICATED FOR CURBS, WALLS AND SIDEWALKS CLEANING.

- 8 SPRINKLERS FOR SIDE BRUSH (SPZ120 EXCLUDED)
- 9 HITCH FOR ARTICULATED LOADERS, BACKHOE LOADERS AND TELEHANDLER HANDLERS.
- 10 14 (A) OR 8 PIN (B) CONNECT