




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE PATENTED SEMI-AUTOMATIC CW AUT'O'LOCK QUICK COUPLER ENABLES THE FAST LOCKING AND UNLOCKING OF THE ATTACHMENTS, CONSIDERABLY REDUCING THE TIME FOR THEIR REPLACEMENT. IT IS PROVIDED WITH A SEMI-AUTOMATIC SYSTEM THAT REQUIRES THE MANUAL INTERVENTION WHEN THE TOOL HAS TO BE RELEASED. BOTH THE LOCKING AND THE SAFE BLOCKING OF THE NEW TOOL ARE AUTOMATICALLY OPERATED.

SEMI-AUTOMATIC

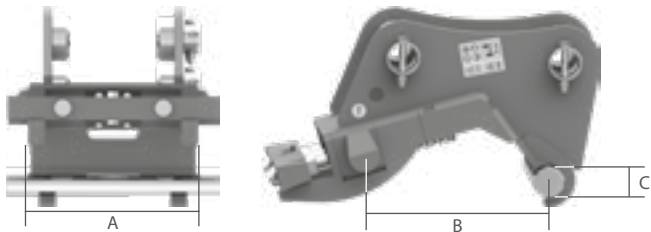

W/O COUPLER

TONS (LB)		0,6 - 4,0 (1323 - 8818)		4,0 - 10,0 (8818 - 22046)	
MOD.		CW05 S.A.		CW10 S.A.	
A	MM (IN)	175	(6,9)	305	(12)
B	MM (IN)	200	(7,9)	300	(11,9)
C	MM (IN)	40	(1,6)	50	(2)
		KG (LB)	24	74	(163)



OPTIONAL

- 1 LIFTING HOOK**
A HOOK APPROVED FOR LIFTING OPERATIONS CAN BE WELDED DIRECTLY ON THE QUICK COUPLER.
- 2 CW ON HINGE**
RECOMMENDED APPLICATION ON BUCKETS.
- 3 CW FOR TILTING BUCKETS**
RECOMMENDED APPLICATIONS ON TILTING BUCKETS.
- 4 REVERSE CW**
RECOMMENDED APPLICATION ON FLAT PLATES, SUCH AS ADAPTER PLATES, MULCHERS, SHEARS, ETC.
- 5 REVERSIBLE CW**
RECOMMENDED APPLICATIONS ON BUCKETS USED IN BACK OR FRONT DIGGING WORKS.