

STANDARD TECHNICAL FEATURES

- 1 REINFORCING STRIPS**
THE HORIZONTAL REINFORCING STRIPS ON THE BUCKET'S REAR AND BOTTOM PROTECT THE BUCKET FROM WEAR AND INCREASE ITS RESISTANCE.
- 2 BLOCK VALVE**
IT ALLOWS TO KEEP THE BUCKET POSITIONING DURING THE WORKING PHASE.
- 3 DOUBLE CYLINDER FOR SQ65 GD, SQ70 GD**

OPTIONAL

- 4 PERFORATED BLADE**
- 5 HB400 ADDITIONAL BOLT-ON REVERSIBLE CUTTING EDGE**
BOLTED-IN HB400 REVERSIBLE UNDERBLADE. RECOMMENDED TO WORK ON PARTICULARLY ABRASIVE SOILS.
- 6 HB500 WELDED ADDITIONAL CUTTING EDGE**
- 7 BEZEL**
IT ENSURES A HIGHER STRUCTURAL RESISTANCE. **HIGHLY RECOMMENDED WITH BUCKETS 1400MM (55) WIDE OR MORE.**
- 8 REAR RAZOR**
WHEN THE MACHINE'S ARM IS KEPT CLOSED, IT ALLOWS TO FINISH SURFACES EVENLY.

- 9 PIPE KIT**
OPTIONAL KIT INSTALLED ON THE BUCKET FOR THE FEEDING OF THE HYDRAULIC CYLINDER. IT ALLOWS THE USE OF TWO OUTLETS ON THE RIGHT AND TWO OUTLETS ON THE LEFT FOR THE HYDRAULIC CONNECTION TO THE MACHINE REDUCING THE INSTALLATION TIMES. THE CONNECTING PIPES ARE NOT SUPPLIED.


PARTICULARLY SUITABLE FOR FINISHING AND LEVELLING WORKS. ITS TILTING MECHANISM ENABLES TO TILT THE BUCKET BY 45° ON BOTH SIDES. THE STANDARD BLOCK VALVE ENABLES TO KEEP THE ANGLE.

THE INSTALLATION OF BEZELS IS HIGHLY RECOMMENDED FOR BUCKETS WIDER THAN 1400 MM, IN ORDER TO AVOID DAMAGES TO THE BUCKET IN CASE OF HEAVY DUTY JOBS OR WITH PARTICULARLY HARD TERRAINS:

- WIDTH FROM 1400 TO 1500 MM: NR. 1 BEZEL
- WIDTH FROM 1600 TO 1600 MM: NR. 2 BEZELS
- WIDTH FROM 1800 TO 2200 MM: NR. 3 BEZELS

MOD.	MIDI EXCAVATOR						EXCAVATOR		
	SQ30	SQ35	SQ40	SQ45	SQ50	SQ55	SQ60	SQ65 GD	SQ70 GD
TONS (LB)	1,0 - 1,8 (2204 - 3968)	1,8 - 2,5 (3968 - 5512)	2,5 - 4,0 (5512 - 8818)	4,0 - 5,0 (8818 - 11023)	5,0 - 7,5 (11023 - 16535)	7,5 - 10,0 (16535 - 22046)	10,0 - 12,0 (22046 - 26455)	12,0 - 18,0 (26456 - 39683)	18,0 - 22,0 (39683 - 48502)

SQ30 MACHINE WEIGHT 1,0 - 1,8 t (2204 - 3968 lb)

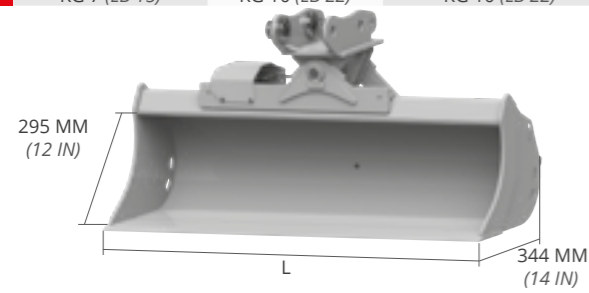


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
800 (31)	69 (153)	58 (15,3)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1000 (39)	78 (173)	74 (19,5)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

- 8 REAR RAZOR
- 9 PIPE KIT

SQ35 MACHINE WEIGHT - 1,8 - 2,5 t (3968 - 5512 lb)


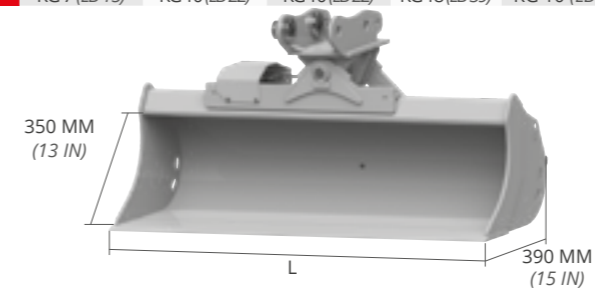


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
800 (31)	76 (169)	75 (19,8)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1000 (39)	85 (188)	96 (25,4)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1200 (47)	94 (208)	117 (30,9)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

- 4 PERFORATED BLADE
- 5 HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET
- 6 HB500 WELDED ADDITIONAL CUTTING EDGE
- 8 REAR RAZOR
- 9 PIPE KIT

SQ40 MACHINE WEIGHT 2,5 - 4,0 t (5512 - 8818 lb)

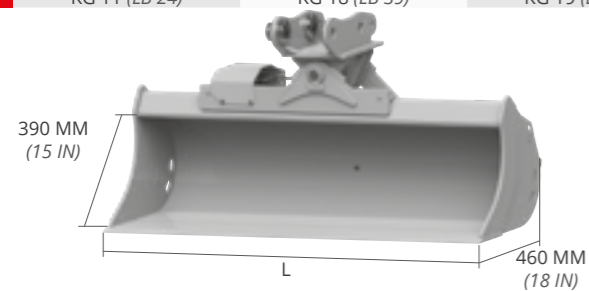



L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1000 (39)	130 (286)	125 (33,0)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1200 (47)	143 (315)	154 (40,7)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	156 (343)	182 (48,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

- 4 PERFORATED BLADE
- 5 HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET
- 6 HB500 WELDED ADDITIONAL CUTTING EDGE
- 7 BEZEL
- 8 REAR RAZOR
- 9 PIPE KIT

SQ45 MACHINE WEIGHT 4,0 - 5,0 t (8818 - 11023 lb)

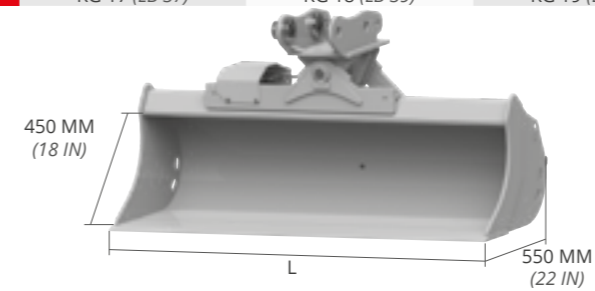

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	196 (433)	213 (56,3)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	213 (470)	254 (67,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1500 (59)	221 (488)	274 (72,4)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO



OPTIONAL

- 4 PERFORATED BLADE
- 5 HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET
- 6 HB500 WELDED ADDITIONAL CUTTING EDGE
- 7 BEZEL
- 8 REAR RAZOR
- 9 PIPE KIT

* weight of the tank excluding attachment


* weight of the tank excluding attachment

SQ50 MACHINE WEIGHT 5,0 - 7,5 t (11012 - 16535 lb)

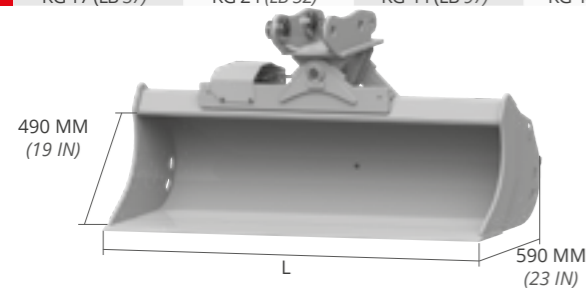


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	219 (483)	250 (66,0)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	239 (527)	298 (78,8)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1600 (63)	259 (571)	345 (91,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1800 (71)	279 (616)	392 (103,6)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL



SQ55 MACHINE WEIGHT 7,5 - 10,0 t (16535 - 22046 lb)

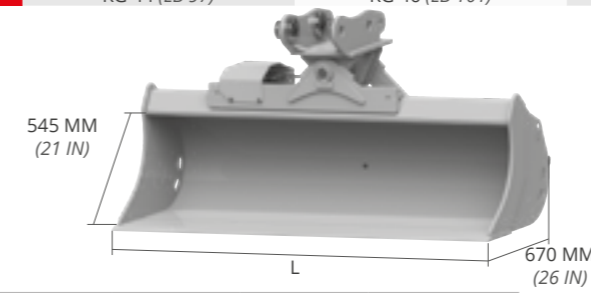


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	296 (653)	326 (86,1)	AF - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	322 (710)	387 (102,2)	AF - CS
			CR - CM
			CW - CS JANUS PRO
1600 (63)	349 (770)	447 (118,1)	AF - CS
			CR - CM
			CW - CS JANUS PRO
1800 (71)	376 (829)	507 (133,9)	AF - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL




SQ60 MIDI MACHINE WEIGHT 10,0 - 12,0 t (22046 - 26455 lb)


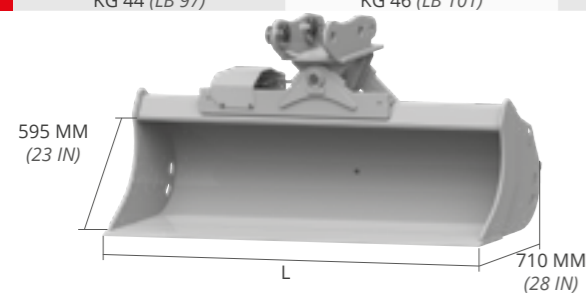


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	331 (730)	367 (97,0)	AF - CS
			CR - CM - CS JANUS PRO
			CW
1400 (55)	361 (796)	436 (115,2)	AF - CS
			CR - CM - CS JANUS PRO
			CW
1600 (63)	393 (867)	504 (133,1)	AF - CS
			CR - CM - CS JANUS PRO
			CW
1800 (71)	423 (933)	573 (151,4)	AF - CS
			CR - CM - CS JANUS PRO
			CW
2000 (79)	453 (999)	641 (169,3)	AF - CS
			CR - CM - CS JANUS PRO
			CW

OPTIONAL

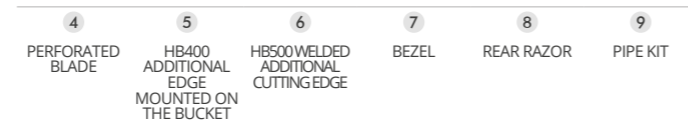


SQ65 GD EXCAVATOR MACHINE WEIGHT 12,0 - 18,0 t (26456 - 39683 lb)

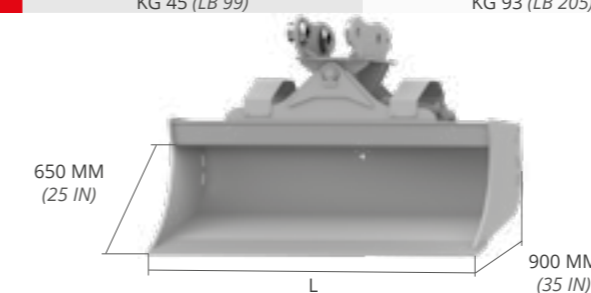

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1400 (55)	456 (1005)	631 (166,7)	AF - CM
			CS - CW
			CS JANUS PRO
1500 (59)	477 (1052)	665 (175,7)	AF - CM
			CS - CW
			CS JANUS PRO
1600 (63)	497 (1096)	699 (184,7)	AF - CM
			CS - CW
			CS JANUS PRO
1800 (71)	538 (1186)	767 (202,6)	AF - CM
			CS - CW
			CS JANUS PRO
2000 (79)	578 (1274)	835 (220,6)	AF - CM
			CS - CW
			CS JANUS PRO

OPTIONAL

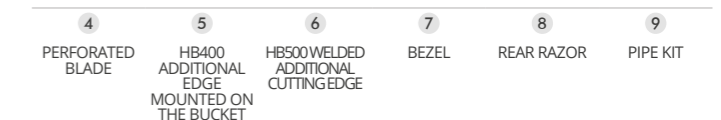


* weight of the tank excluding attachment

* weight of the tank excluding attachment

SQ70 GD MACHINE WEIGHT 18,0 - 22,0 t (39683 - 48502 lb)

ADAPTERS	CS100 KG 45 (LB 99)	CS100 JANUS PRO KG 93 (LB 205)	CM180 KG 66 (LB 145)	CW30 KG 57 (LB 126)
----------	------------------------	-----------------------------------	-------------------------	------------------------

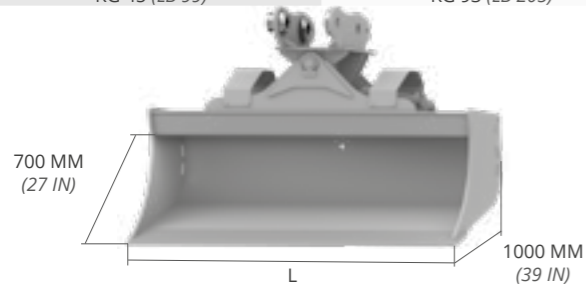

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1500 (59)	555 (1224)	780 (206,1)	AF - CM
			CS - CW
			CS JANUS PRO
1600 (63)	580 (1279)	820 (216,6)	AF - CM
			CS - CW
			CS JANUS PRO
1800 (71)	630 (1389)	900 (237,8)	AF - CM
			CS - CW
			CS JANUS PRO
2000 (79)	678 (1495)	980 (258,9)	AF - CM
			CS - CW
			CS JANUS PRO
2200 (87)	724 (1596)	1060 (280,0)	AF - CM
			CS - CW
			CS JANUS PRO

OPTIONAL

4	5	6	7	8	9
PERFORATED BLADE	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	HB500 WELDED ADDITIONAL CUTTING EDGE	BEZEL	REAR RAZOR	PIPE KIT



* weight of the tank excluding attachment