




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

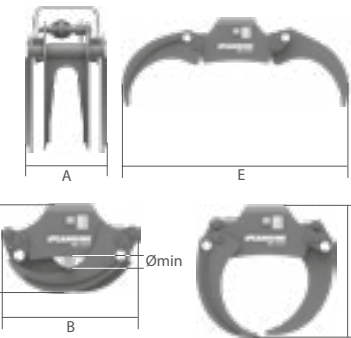

ROTATION OF 360°, THIS FUNCTION IS LINKED TO THE CHOICE OF THE HYDRAULIC ENGINE - ASSISTS THE OPERATOR IN THE LOGS' GRIP PHASE, SPEEDING UP THIS OPERATION AND MAKING HIS WORK EFFECTIVE. PARTS SUBJECT TO WEAR ARE MADE OF DOMEX 700. IT'S PARTICULARLY SUITED FOR THE HANDLING OF CUT WOOD AND PRUNINGS. IT'S STANDARD EQUIPPED WITH A BLOCK VALVE ON THE CLAMP-CLOSING CYLINDER.

	TONS (LB)	1,8 - 3,5 (3968-7716)	3,5 - 4,0 (7716-8818)	4,0 - 5,0 (8818-11023)	5,0 - 7,0 (11023-15432)	7,0 - 8,0 (15432-17637)	8,0 - 10,0 (17637-22046)	10,0 - 12,0 (22046 - 26455)	12,0 - 16,0 (26455-35274)
	MOD.	WG 1100SPWG	1300SPWG	1300SPWG	1500SPWG	1650SPWG	1800SPWG	1800SPWG	2000SPWG
A	MM (IN)	425 (16,7)	450 (18)	450 (18)	530 (21)	530 (21)	640 (25)	640 (25)	640 (25)
B	MM (IN)	610 (24)	735 (29)	735 (29)	815 (32)	1030 (41)	1180 (46)	1180 (46)	1225 (48)
C	MM (IN)	440 (17)	495 (19)	495 (19)	580 (23)	590 (23)	680 (27)	680 (27)	730 (29)
D	MM (IN)	685 (27)	770 (30)	770 (30)	830 (33)	980 (38)	985 (39)	985 (39)	1060 (42)
E	MM (IN)	1210 (48)	1430 (56)	1430 (56)	1650 (65)	1650 (65)	1845 (73)	1845 (73)	2020 (80)
	KG (LB)	100 (221)	140 (309)	140 (309)	225 (496)	300 (661)	440 (970)	440 (970)	495 (1091)
	MM (IN)	80 (3,1)	75 (3)	75 (3)	95 (3,7)	100 (3,9)	120 (4,7)	120 (4,7)	150 (5,9)
	L/MIN (GALL/MIN)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)
	KG (LB)	1900 (4189)	2100 (4630)	2100 (4630)	3100 (6834)	4000 (13228)	6000 (13228)	6000 (13228)	6000 (13228)
	BAR (PSI)	200 (2901)	200 (2901)	200 (2901)	200 (2901)	230 (3336)	250 (3626)	250 (3626)	250 (3626)



OPTIONAL

1 DOUBLE PIN HITCH (A) OR ADAPTER (B)

2 SINGLE PIN HITCH

3 TWO PIPE KIT

IT ENABLES THEIR ROTATION AND THE JAWS' OPENING AND CLOSING FUNCTIONS ON MACHINES EQUIPPED WITH A SINGLE HYDRAULIC DOUBLE-EFFECT LINE.

4 BASIC ROTOR

SHAFT ROTOR TO DRIVE THE GRABS.

5 FLANGED ROTOR

FLANGED ROTOR IDEAL FOR HEAVY DUTY JOBS.

