




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE FORESTRY MULCHER HAS BEEN DESIGNED TO MANAGE THE HEAVIEST WORKLOADS: THE DEEP CLEARING OF WOODS AND FORESTS. IT IS EQUIPPED WITH A PISTON ENGINE TO RUN AT THE MOST INTENSE WORK PACE. THE EXCAVATOR-TYPE MULCHER CAN REACH THE NARROWEST AREAS.

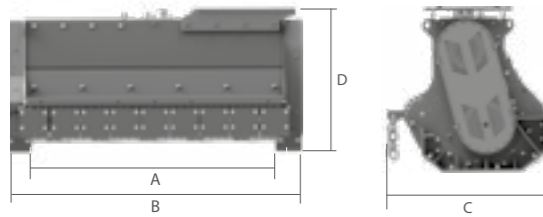

TONS (LB)	10,0 - 15,0 (22046,2-33069,3)		14,0 - 20,0 (30864,7-44092,5)		
MOD.	TX5-100	TX5-120	TX6-110	TX6-130	TX6-150
MM (IN)	1015 (39,96)	1280 (50,39)	1150 (45,2)	1350 (53,14)	1550 (61,02)
MM (IN)	1300 (51,18)	1540 (60,62)	1520 (59,8)	1740 (68,5)	1950 (76,7)
MM (IN)	720 (28,34)	720 (28,34)	760 (29,9)	760 (29,9)	760 (29,9)
MM (IN)	740 (29,13)	740 (29,13)	910 (35,8)	910 (35,8)	910 (35,8)
KG (LB)	535 (1179,47)	600 (1322,77)	980 (2160,53)	1060 (2336,9)	1130 (2491,2)
KG (LB)	550 (1212,54)	610 (1344,82)	1010 (2226,6)	1100 (2425)	1180 (2601,4)
MM (IN)	220 (8,66)	220 (8,66)	280 (11)	280 (11,02)	280 (11,02)
MM (IN)	220 (8,66)	220 (8,66)	280 (11)	280 (11,02)	280 (11,02)
N.	3	3	4	4	4
CC	23-46	23-46	32-64	32-64	32-64
MM (IN)	405 (16)	405 (16)	460 (18)	460 (18)	460 (18)
L/MIN (GAL/MIN)	90 (24)	90 (24)	110 (16)	110 (29)	110 (29)
L/MIN (GAL/MIN)	300 (79)	300 (79)	300 (79)	300 (79)	300 (79)
BAR (PSI)	400 (5801)	400 (5801)	400 (5801)	400 (5801)	400 (5801)

	R2	W/O COUPLER				
	R3	W/O COUPLER				