







IT IS PERFECT FOR THE MAINTENANCE AND CLEANING OF OPEN SURFACES, FLOORS, INDUSTRIAL HALLS AND STREETS THAT REQUIRE A HIGH-LEVEL CLEANING.



		MOD.	EASY SWEEPY R160	EASY SWEEPY R180	EASY SWEEPY R210	EASY SWEEPY R230
A B	A	MM (IN)	1600 ( <i>62,99</i> )	1800 (70,86)	2100 (82,67)	<b>2300</b> (90,55)
	В	MM (IN)	1850 (72,83)	2050 (80,70)	<b>2350</b> (92,51)	2550 (100,39)
	с	<b>MM</b> (IN)	<b>800</b> (31,4)	<b>800</b> (31,4)	<b>800</b> ( <i>31,4</i> )	<b>800</b> (31,4)
	D	MM (IN)	<b>1300</b> (51,18)	1300 (51,18)	<b>1300</b> (51,18)	1300 (51,18)
W/O COUPLER		KG (LB)	<b>330</b> (727,52)	350 (771,61)	<b>375</b> (826,73)	395 (870,82)
		MM (IN)	600 (23,62)	600 (23,62)	600 (23,62)	600 (23,62)
		N.	32 + 2	37 + 2	43 + 2	48 + 2
MAX.	(	L/MIN (GAL/MIN)	<b>70</b> (18,49)	70 (18,49)	<b>70</b> (18,49)	<b>70</b> (18,49)
MAX.		BAR (PSI)	<b>250</b> (3625,94)	<b>250</b> (3625,94)	<b>250</b> (3625,94)	<b>250</b> (3625,94)

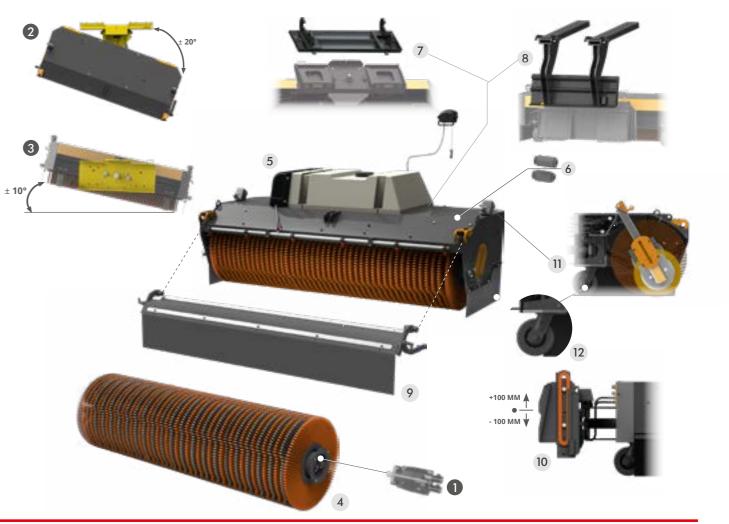

## **STANDARD TECHNICAL FEATURES**

0	ENGINE WITH SQUARE FLANGES AND DISK GEARBOX	
	SHAFT WITH INTEGRAL MOTOR, NOT SUITABLE FOR HIGH FLOW SYSTEM	
-		

- **2** ANGLE SIDE HYDRAULIC TILTING ADJUSTMENT OF ± 20° IT ALLOWS THE HYDRAULIC ADJUSTMENT OF THE TILTING ANGLE UP TO A MAX. OF +/-20° ON EACH SIDE.
- **3** TILT HORIZONTAL MECHANICAL TILTING ADJUSTMENT OF ±10°

IT ALLOWS THE MECHANICAL ADJUSTMENT OF THE WORKING PLANE TILTING ANGLE UP TO A MAX. OF +/- 10° ON EACH SIDE.

## **OPTIONAL**

PPL+STEEL BRUSH KIT 4 RECOMMENDED FOR THE CLEANING OF PARTICULARLY ABRASIVE SURFACES.

5 DUST-CONTROL SYSTEM WITH TANK AND PUMP

PRESSURIZED WATER SYSTEM WITH TANK FOR THE CONTROL OF DUSTS PRODUCED DURING THE WORKING CYCLE. SPRINKLERS ARE POSITIONED INSIDE AND OUTSIDE THE SWEEPER.

6 FLOWRATE REDUCERS

MANDATORY ON HIGHFLOW MACHINES OR WITH OILRATE HIGHER THAN 70 L/MIN.

- (7) ARTICULATED LOADERS, BACKHOE LOADERS AND TELEHANDLER HANDLERS HITCH
- 8 COUPLING FRAME FOR FORKS
- 9 ADJUSTABLE FRONT SKIRT
- 10 COMPACT FLOATING SYSTEM 200 MM

IT ALLOWS THE SWEEPER TO FOLLOW THE GROUND AND BETTER THE FINAL RESULT. DESIGNED FOR MACHINES SUCH AS LOADERS AND TELESCOPIC LOADERS.

11 ROLLER PRESSURE ADJUSTMENT SYSTEM

MANDATORY APPLICATION IN COMBINATION WITH COMPACT FLOATING SYSTEM

12 WHEELS KIT

SUPPORTING WHEELS MANDATORY APPLICATION IN COMBINATION WITH COMPACT FLOATING SYSTEM

Kg

ØØ