



TX-F FORCE ONE
FRONT FORESTRY MULCHER



SKID LOADER



WHEEL LOADER




PATENTED
PENDING



NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

SAME ENDURANCE FOR THE FRONTAL VERSION THANKS TO THE REINFORCED SHELL, VALVE KIT INCLUDED IN STANDARD EQUIPMENT PROTECTS PISTON ENGINE FROM PRESSURE PEAKS. IT'S THE PERFECT TOOL TO CREATE FIREBREAK LINES, OPEN TRACKS, PATHS AND CUT DOWN TREES.

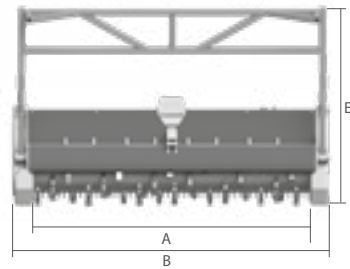

	MOD.	TX5F-170	TX5F-195
A	MM (IN)	2010 (79,1)	2260 (88,9)
B	MM (IN)	2010 (79,1)	2260 (88,9)
C	MM (IN)	750 (29,5)	750 (29,5)
D	MM (IN)	820 (32,2)	820 (32,2)
E	MM (IN)	1700 (66,93)	1950 (516)
	KG (LB)	780 (1764,0)	830 (1830,2)
	MM (IN)	220 (8,6)	220 (8,6)
	MM (IN)	220 (8,6)	220 (8,6)
	N.	3	3
	L/MIN (GAL/MIN)	90 (24)	90 (24)
	L/MIN (GAL/MIN)	300 (79)	300 (79)
	BAR (PSI)	400 (5801)	400 (5801)

Kg R2 W/O COUPLER

Kg R3 W/O COUPLER

✂ Ø R2

✂ Ø R3




MIN



MAX



MAX

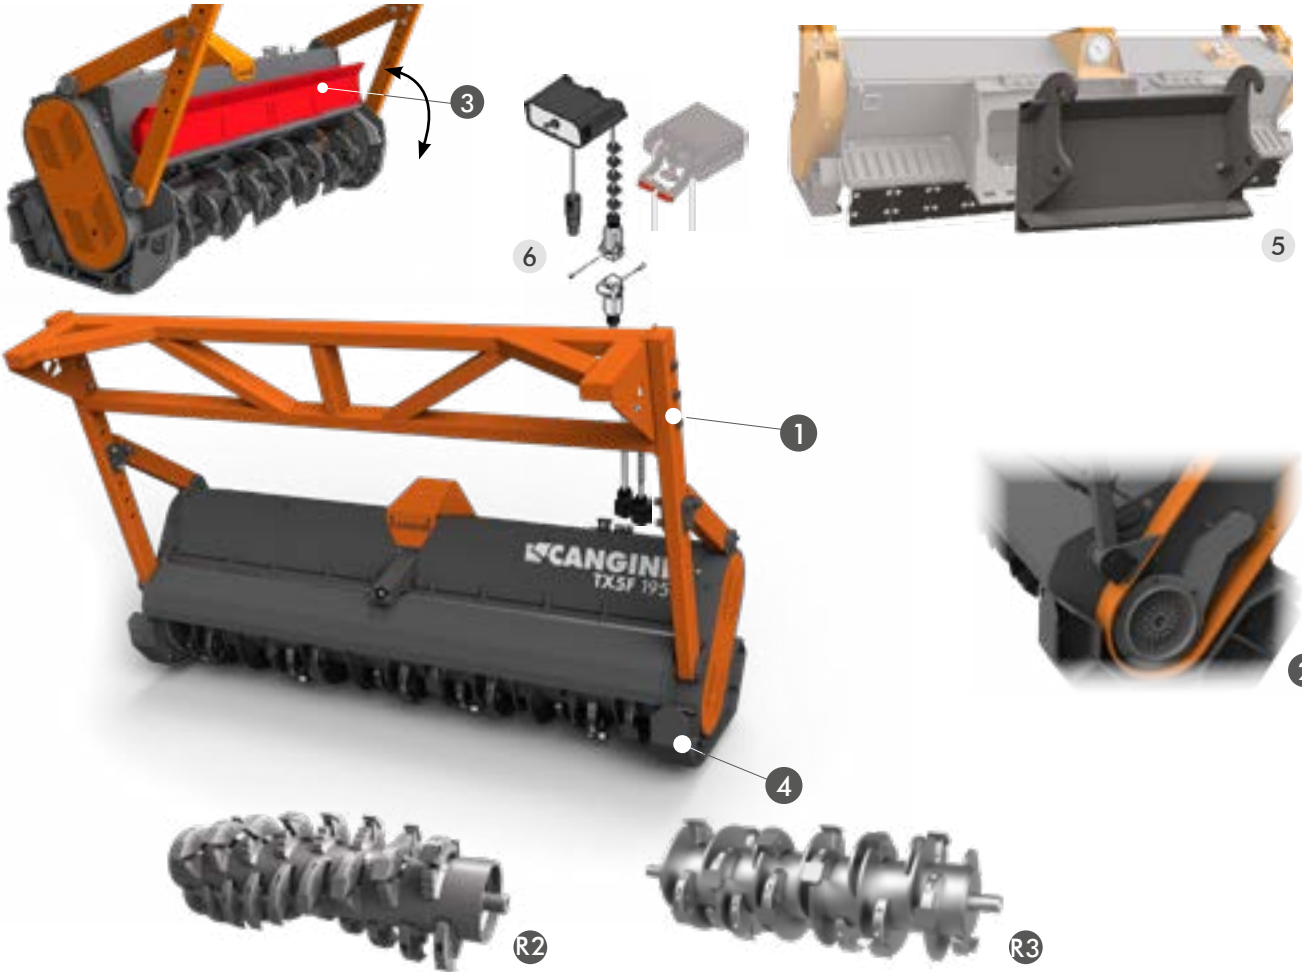

STANDARD TECHNICAL FEATURES

1 FRONT PROTECTION FRAME

THE ADJUSTABLE PROTECTION FRAME ENSURES THAT THE PLANT FALLS AWAY FROM THE OPERATOR.

2 AUTOMATIC COOLING SYSTEM

IT IS EQUIPPED WITH A FORCED-AIR VENTILATION SYSTEM TO HELP REDUCE OVERHEATING OF THE MULCHER'S HYDRAULIC COMPONENTS.

3 HYDRAULIC HOOD OPENING

THE FRONT HOOD OPENING MAKES THE ROTOR PENETRATE THE VEGETATION.

4 HB400 REINFORCED SKIDS

R2 R2 ROTOR

DESIGNED FOR HEAVY-DUTY WORKS, IT SPECIALLY FITS THE PLANT MULCHING.

R3 R3 ROTOR

R3 ROTOR IS HIGHLY VERSATILE AND SUITABLE FOR MULTIPLE USES FROM CUTTING BRUSHWOOD TO TREE GRINDING. IT ALLOWS CUTTING FROM A DIAMETER OF 22CM UP TO A MAXIMUM OF 28CM DEPENDING ON THE MODEL USED.

OPTIONAL

5 ARTICULATED LOADERS HITCH

IT'S POSSIBLE TO ADD THE HITCH FOR ARTICULATED LOADERS TO THE SKID LOADER HITCH PROVIDED WITH THE STANDARD EQUIPMENT

6 2 HOSES KIT

IT ALLOWS THE FUNCTIONING OF THE HYDRAULIC OPENING/CLOSING OF THE ANTERIOR FLAP ON SINGLE HYDRAULIC LINE MACHINES. CONTROL KIT WITH MAGNETS TO EASILY PUT IT INSIDE THE CAB.