




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE CR TWIN LOCK D.E. QUICK COUPLER, WITH ITS **DOUBLE ACTION** SYSTEM, MANAGES THE LOCKING AND UNLOCKING OPERATIONS DIRECTLY FROM THE CAB IN A FEW SECONDS. IT MEETS THE HIGHEST RELIABILITY STANDARDS THANKS TO ITS SAFETY SYSTEMS, SUCH AS THE VISUAL INDICATOR FOR THE LOCKING STATUS CONTROL, THE STANDARD BLOCK VALVE, THE DOUBLE-NOTCH PROFILE OF THE FORK. THE SIDES ARE REALIZED ENTIRELY WITH THE HB400 STEEL, GRANTING GREAT RESISTANCE.

HYDRAULIC DOUBLE ACTION

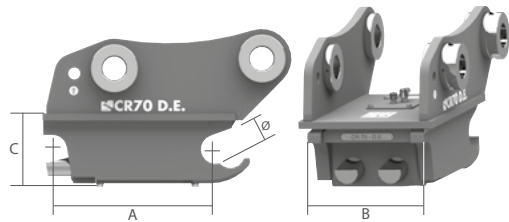

TONS (LB)	0,6 - 1,8 (1323 - 3968)	1,8 - 2,5 (3968 - 5512)	2,5 - 4,0 (5512 - 8819)	4,0 - 6,0 (8819 - 13228)	6,0 - 12,0 (13228 - 26455)
MOD.	CR15 D.E.	CR30 D.E.	CR40 D.E.	CR50 D.E.	CR70 D.E.
A	MM (IN) 247 (9,7)	252 (9,9)	260 (10,2)	290 (11,4)	345 (13,5)
B	MM (IN) 156 (6,1)	180 (7,1)	196 (7,7)	218 (8,6)	257 (10,1)
C	MM (IN) 101 (4,0)	107 (4,2)	109 (4,3)	133 (5,2)	148 (5,8)
Ø	MM (IN) 40 (1,6)	45 (1,8)	45 (1,8)	50 (2,0)	60 (2,4)
W/O COUPLER	KG (LB) 17,5 (40)	23 (49)	27 (60)	42 (84)	68 (135)
MAX	BAR (PSI) 200 (2901)	200 (2901)	200 (2901)	200 (2901)	200 (2901)



STANDARD TECHNICAL FEATURES

- 1 FORK'S DOUBLE PROFILE**
NEW DOUBLE CRADLE PROFILE CREATE A GREATER OBSTACLE TO THE ACCIDENTAL FALL OF THE TOOL.
- 2 FRONT SAFETY SYSTEM**
THROUGH TO THE VISUAL INDICATOR PLACED IN THE COUPLER, THE VISUALISATION OF THE LOCKING CONDITION IS SIMPLE AND IMMEDIATE.
A LOCKING PINS **B** UNLOCKIN PINS
- 3 SAFETY BLOCK VALVE**
IT ALLOWS THE QUICK COUPLER TO HOLD ITS POSITION EVEN IN THE CASE OF A PRESSURE LOSS ON THE HYDRAULIC LINE.
- 4 "SAFE CHECK" SIDE COUPLING INDICATOR**
THE 'SAFE CHECK' SIDE INDICATOR ALLOWS THE QUICK COUPLERS FULL CONTROL OVER THE ADAPTER.IT PERMITS TO CHECK IF THE QUICK COUPLER IS IN THE RIGHT POSITION TO ENSURE CORRECT COUPLING ONCE THE PINS ARE OUT..

OPTIONAL

- 5 HYDRAULIC INSTALLATION KIT**
THIS KIT CAN BE SUPPLIED WITH THE QUICK COUPLER HYDRAULIC VERSION. SUPPLIED WITH WIRED SOLENOID VALVE AND CONTROL SWITCH.
- 6 LIFTING HOOK**
A HOOK APPROVED FOR LIFTING OPERATIONS CAN BE WELDED DIRECTLY ON THE QUICK COUPLER.
- 7 CR ADAPTE**
THE CR ADAPTER MAKES THE TOOL REVERSIBLE.