






THE C.B. SERIES HYDRAULIC DEMOLITION HAMMER IS AVAILABLE IN 9 MODELS FOR EXCAVATORS WITH WORKING WEIGHT FROM 0,5 TO 12,5 TONNES. ITS ENCASED STRUCTURE IS DESIGNED TO MINIMISE THE NOISE LEVELS EMITTED BY THE HAMMER. THE SYSTEM IS DEVELOPED TO RECOVER THE NITROGEN'S INERTIAL ENERGY IN ORDER TO BOOST POWER. THE PRODUCT'S DESIGN ENABLES GREATER VISIBILITY WHEN AT WORK.

		TONS (LB)	0,5 - 1,4 (1102-3086)	0,6 - 1,8 (1323-3968)	1,5 - 2,5 (1323-3968)	1,5 - 3,8 (3307-8378)	2,5 - 5,0 (3307-8378)	3,0 - 6,5 (3307-8378)	4,5 - 8,5 (6614-18740)	6,0 - 10,0 (6614-22046)	8,0 - 12,5 (17637-26455)
	MOD.		CB55	CB70	CB100	CB150	CB200	CB250	CB300	CB400	CB500
	A	MM (IN)	583 (23)	583 (23)	666 (26)	666 (26)	869 (34)	869 (34)	904 (36)	1135 (46)	1135 (46)
	B	MM (IN)	200 (8)	228 (9)	255 (10)	255 (10)	275 (11)	300 (12)	295 (12)	378 (15)	431 (17)
	WITHOUT COUPLING	KG (LB)	60 (132)	70 (154)	100 (220)	135 (298)	190 (419)	240 (529)	300 (529)	430 (529)	480 (529)
	TOOL DIAMETER	MM (IN)	40 (2)	40 (2)	45 (2)	48 (2)	55 (2)	65 (3)	75 (3)	80 (3)	90 (4)
	MAX	BAR (PSI)	110 (1595)	110 (1595)	110 (1595)	110 (1595)	130 (1885)	140 (2030)	160 (2321)	150 (2176)	150 (2176)
	MAX	L/MIN (GAL/MIN)	15-20 (4 - 5)	18-23 (5 - 6)	20-30 (5 - 8)	22-40 (6 - 10)	25-55 (7 - 15)	30-60 (8 - 16)	50-70 (13 - 18)	75-90 (20 - 24)	85-110 (22 - 29)
	ROUNDS PER MINUTE	N.	800 - 1700	800 - 1750	800 - 2300	800 - 2000	900 - 1900	850 - 1800	600 - 1500	500 - 1300	600 -1200
	BACKPRESSURE	BAR (PSI)	30 (435)	30 (435)	30 (435)	30 (435)	30 (435)	30 (435)	30 (435)	30 (435)	30 (435)
	IMPACT ENERGY	J	250	280	400	580	750	950	1200	1700	2300

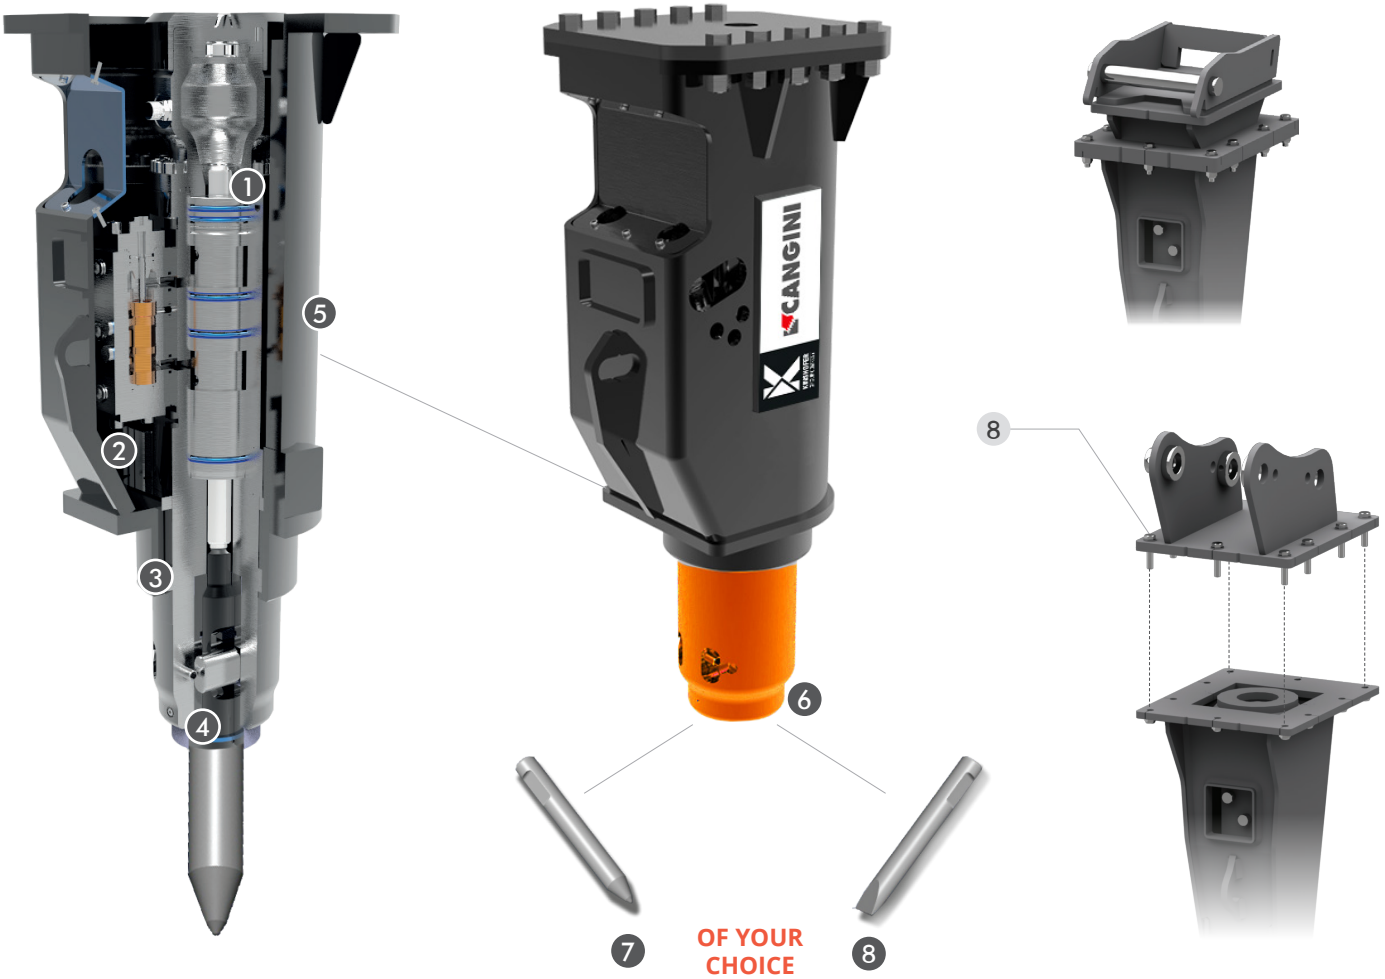

STANDARD TECHNICAL FEATURES

- 1 NITROGEN CHAMBER**
IT RECOVERS THE NITROGEN'S INERTIAL ENERGY, REDUCING MAINTENANCE COSTS SINCE IT DOES NOT CONTAIN DIAPHRAGMS.
- 2 PROTECTED PIPELINES**
THEY ARE SUITABLE FOR DRILLING OPERATIONS OF ALL KINDS AND ARE PROTECTED BY A CASING
- 3 LOW-NOISE BODY**
THE CASING CONSISTS OF A SOUNDPROOFING MATERIAL IN ORDER TO REDUCE THE LEVEL OF NOISE GENERATED
- 4 DOUBLE TOOL RETAINER**
THE DOUBLE PIN TOOL LOCKING SYSTEM REDUCES ITS WEAR
- 5 MONOBLOC UNIT**
THE DEMOLITION HAMMER IS BUILT IN A SINGLE BLOCK FOR HIGH RESISTANCE TO LEVERAGE FORCES
- 6 TAPERED SHAPE**
PROVIDES GREATER VISIBILITY WHEN AT WORK
- 7 CONICAL BIT (STANDARD ONE BIT TO BE CHOSEN BETWEEN CONICAL AND CHISEL)**
SUITABLE FOR CONCRETE AND MODERATELY HARD UNSTRATIFIED ROCKS
- 8 CHISEL BIT (STANDARD ONE BIT TO BE CHOSEN BETWEEN CONICAL AND CHISEL)**
SUITABLE FOR MEDIUM-HARD AND STRATIFIED ROCKS

OPTIONAL

- 9 BOLTED-IN ADAPTER PLATE**
IT CAN BE MANUFACTURED FOR ANY BRAND OR MODEL OF HAMMER. IT ENABLE THE COUPLING TO THE MACHINE WITH FIXED OR QUICK COUPLER.
- 10 PILE DRIVER BIT**
SUITABLE FOR DRIVING POSTS OF VARIOUS KINDS
- 11 ASPHALT CUTTER BIT**
SUITABLE FOR CUTTING ASPHALT



9 BOLTED-IN ADAPTER PLATE FOR CB55 - CB70



AR15
CR15
CS10
CS10 JANUS PRO
PL10 PIN LOCK
CW05 AUTO'O'LOCK
S
CM

9 BOLTED-IN ADAPTER PLATE FOR CB100



AR15
AR30
CR15
CR30
CS10
CS10 JANUS PRO
PL20 PIN LOCK
CW05 AUTO'O'LOCK
S
CM

9 BOLTED-IN ADAPTER PLATE FOR CB150



AR30
AR40
CR30
CR40
CS10
CS30
CS10 JANUS PRO
CS30 JANUS PRO
PL20 PIN LOCK
PL40 PIN LOCK
CW05 AUTO'O'LOCK
S
CM

9 BOLTED-IN ADAPTER PLATE FOR CB200



AR40
AR50
CR40
CR50
CS30
CS30 JANUS PRO
PL40 PIN LOCK
PL60 PIN LOCK
CW05 AUTO'O'LOCK
CW10 AUTO'O'LOCK
S
CM

9 BOLTED-IN ADAPTER PLATE FOR CB250



AR40
AR50
CR40
CR50
CS30
CS30 JANUS PRO
PL40 PIN LOCK
PL60 PIN LOCK
CW05 AUTO'O'LOCK
CW10 AUTO'O'LOCK
S
CM

9 BOLTED-IN ADAPTER PLATE FOR CB300



AR50
AR70
CR50
CR70
CS30
CS80
CS30 JANUS PRO
CS80 JANUS PRO
PL60 PIN LOCK
PL80 PIN LOCK
CW10 AUTO'O'LOCK
S
CM

9 BOLTED-IN ADAPTER PLATE FOR CB400




AR70
CR70
CS80
CS10 JANUS PRO
PL60 PIN LOCK
PL80 PIN LOCK
CW10 AUTO'O'LOCK
S
CM

9 BOLTED-IN ADAPTER PLATE FOR CB500



CR70
CS80
CS80 JANUS PRO
PL80 PIN LOCK
CW10 AUTO'O'LOCK
S
CM

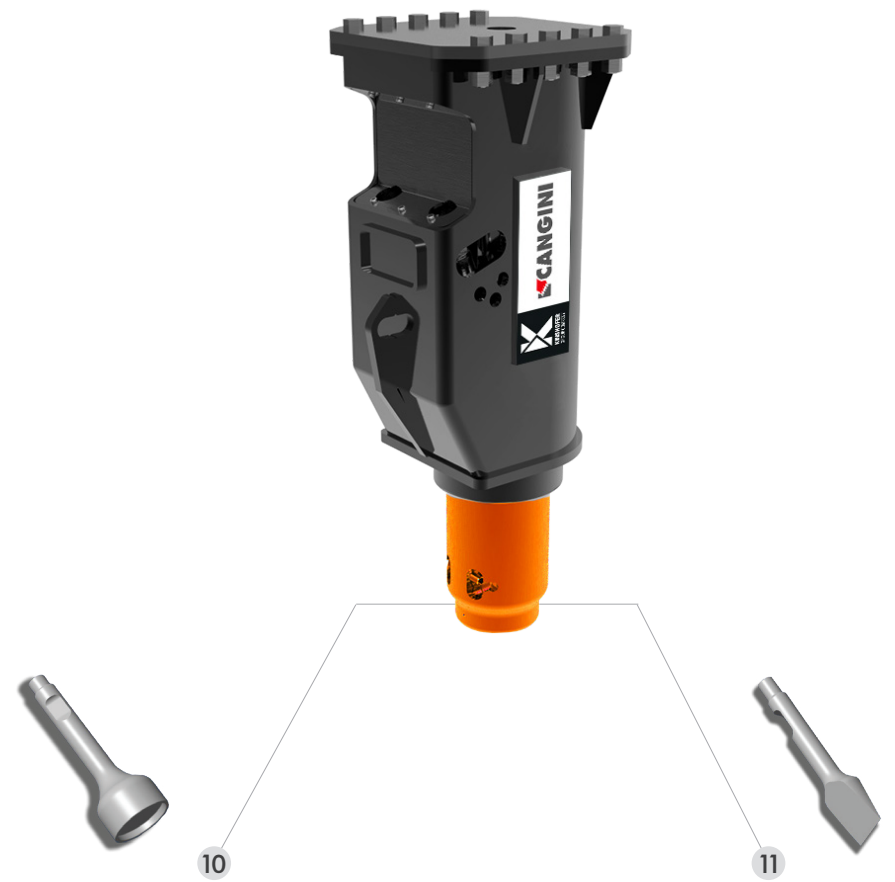

MOD.	DIAMETER
	MM (IN)
CB55	100 (3,9)
	120 (4,7)
	145 (5,7)
CB70	100 (3,9)
	120 (4,7)
	145 (5,7)
CB100	100 (3,9)
	120 (4,7)
	145 (5,7)
CB150	100 (3,9)
	120 (4,7)
	145 (5,7)
CB200	120 (4,7)
	145 (5,7)
	175 (6,8)
CB250	120 (4,7)
	145 (5,7)
	175 (6,8)
CB300	200 (7,8)
	120 (4,7)
	145 (5,7)
CB400	175 (6,8)
	220 (8,6)
	120 (4,7)
CB400	145 (5,7)
	175 (6,8)
	200 (7,8)

MOD.	DIAMETER
	MM (IN)
CB55	120 (4,7)
	150 (5,9)
CB70	120 (4,7)
	150 (5,9)
CB100	120 (4,7)
	150 (5,9)
CB150	120 (4,7)
	150 (5,9)
CB200	100 (3,9)
	120 (4,7)
CB250	150 (5,9)
	195 (7,6)
CB300	150 (5,9)
	195 (7,6)
CB400	120 (4,7)
	150 (5,9)
CB500	195 (7,6)
	195 (7,6)

ASPHALT
CUTTER BIT