





**NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)**

SAME ENDURANCE FOR THE FRONTAL VERSION THANKS TO THE REINFORCED SHELL, VALVE KIT INCLUDED IN STANDARD EQUIPMENT PROTECTS PISTON ENGINE FROM PRESSURE PEAKS. IT'S THE PERFECT TOOL TO CREATE FIREBREAK LINES, OPEN TRACKS, PATHS AND CUT DOWN TREES.

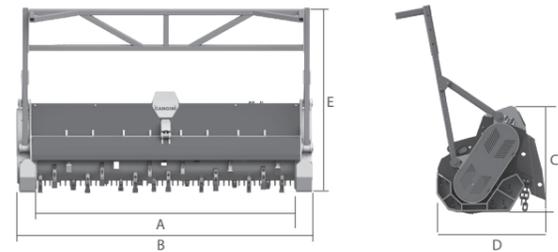

	MOD.	TX5F-170	TX5F-195
<b>A</b>	MM (IN)	2010 (79,1)	2260 (88,9)
<b>B</b>	MM (IN)	2010 (79,1)	2260 (88,9)
<b>C</b>	MM (IN)	750 (29,5)	750 (29,5)
<b>D</b>	MM (IN)	820 (32,2)	820 (32,2)
<b>E</b>	MM (IN)	1700 (66,93)	1950 (516)
R2 W/O COUPLER	KG (LB)	780 (1764,0)	830 (1830,2)
R3 W/O COUPLER	KG (LB)	830 (1830,2)	880 (1940,4)
R2	MM (IN)	220 (8,6)	220 (8,6)
R3	MM (IN)	220 (8,6)	220 (8,6)
N.		3	3
MIN	L/MIN (GAL/MIN)	90 (24)	90 (24)
MAX	L/MIN (GAL/MIN)	300 (79)	300 (79)
MAX	BAR (PSI)	400 (5801)	400 (5801)
14/8 PIN CONNECT*		STD 14 PIN	STD 14 PIN

\* THE CONNECTOR TYPE YOU REQUIRE MUST BE INDICATED AT THE TIME OF ORDERING, OTHERWISE THE 14-PIN CONNECTOR WILL BE SUPPLIED AS STANDARD.

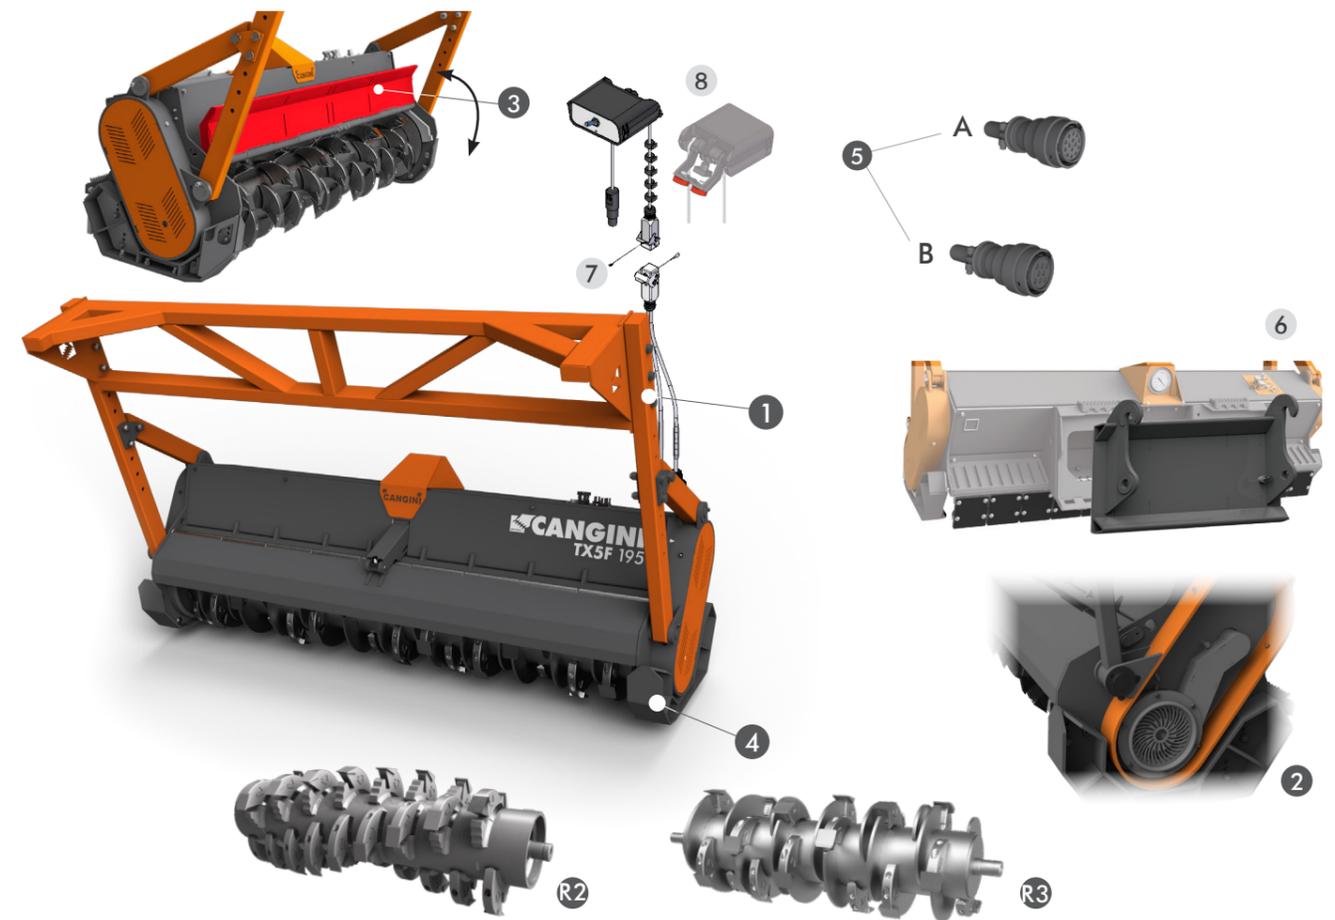

## STANDARD TECHNICAL FEATURES

- 1 FRONT PROTECTION FRAME**  
THE ADJUSTABLE PROTECTION FRAME ENSURES THAT THE PLANT FALLS AWAY FROM THE OPERATOR.
- 2 AUTOMATIC COOLING SYSTEM**  
IT IS EQUIPPED WITH A FORCED-AIR VENTILATION SYSTEM TO HELP REDUCE OVERHEATING OF THE MULCHER'S HYDRAULIC COMPONENTS.
- 3 HYDRAULIC HOOD OPENING**  
THE FRONT HOOD OPENING MAKES THE ROTOR PENETRATE THE VEGETATION.
- 4 HB400 REINFORCED SKIDS**
- R2 R2 ROTOR**  
DESIGNED FOR HEAVY-DUTY WORKS, IT SPECIALLY FITS THE PLANT MULCHING.
- R3 R3 ROTOR**  
R3 ROTOR IS HIGHLY VERSATILE AND SUITABLE FOR MULTIPLE USES FROM CUTTING BRUSHWOOD TO TREE GRINDING. IT ALLOWS CUTTING FROM A DIAMETER OF 22CM UP TO A MAXIMUM OF 28CM DEPENDING ON THE MODEL USED.
- 5 14 PIN (A) 8 PIN (B) CONNECT**  
THE CONNECTOR TYPE YOU REQUIRE MUST BE INDICATED AT THE TIME OF ORDERING. OTHERWISE THE 14-PIN CONNECTOR WILL BE SUPPLIED AS STANDARD.

**NB : THE EQUIPMENT IS SUPPLIED COMPLETE WITH PIPES AND CONNECTIONS**

## OPTIONAL

- 6 ARTICULATED LOADERS HITCH**  
IT'S POSSIBLE TO ADD THE HITCH FOR ARTICULATED LOADERS TO THE SKID LOADER HITCH PROVIDED WITH THE STANDARD EQUIPMENT
- 7 2 HOSES KIT**  
IT ALLOWS THE FUNCTIONING OF THE HYDRAULIC OPENING/CLOSING OF THE ANTERIOR FLAP ON SINGLE HYDRAULIC LINE MACHINES. CONTROL KIT WITH MAGNETS TO EASILY PUT IT INSIDE THE CAB.
- 8 7 PIN CONNECT / ELECTRIC KIT**  
THE CONNECTOR TYPE YOU REQUIRE MUST BE INDICATED AT THE TIME OF ORDERING.