




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE CLAMSHELL BUCKET IS DESIGNED TO WITHSTAND WEAR, WITH CUTTING EDGES IN HB500 STEEL TO ENSURE A LONG WORKING LIFE. THIS ATTACHMENT IS ALSO IDEAL FOR HANDLING BULK MATERIALS AND FOR LOADING WASTE. SUITABLE FOR EXCAVATION AND FOR LOADING SOIL, SAND AND OTHER INERT MATERIALS. ITS COMPACT DESIGN GUARANTEES A HIGH LOAD CAPACITY, WITH EXCELLENT EXCAVATION CHARACTERISTICS PROVIDED BY HIGH CLOSING FORCES.

MOD.	C02H	C05H	C08H	C10H	C12VE
TONS (LB)	1,0 (2.205) - 2,0 (4.409)	3,0 (6.614) - 6,0 (13.228)	4,0 (8818) - 9,0 (19.842)	6,0 (13228) - 10,0 (22.046)	9,0 (19.842) - 12,0 (26.455)

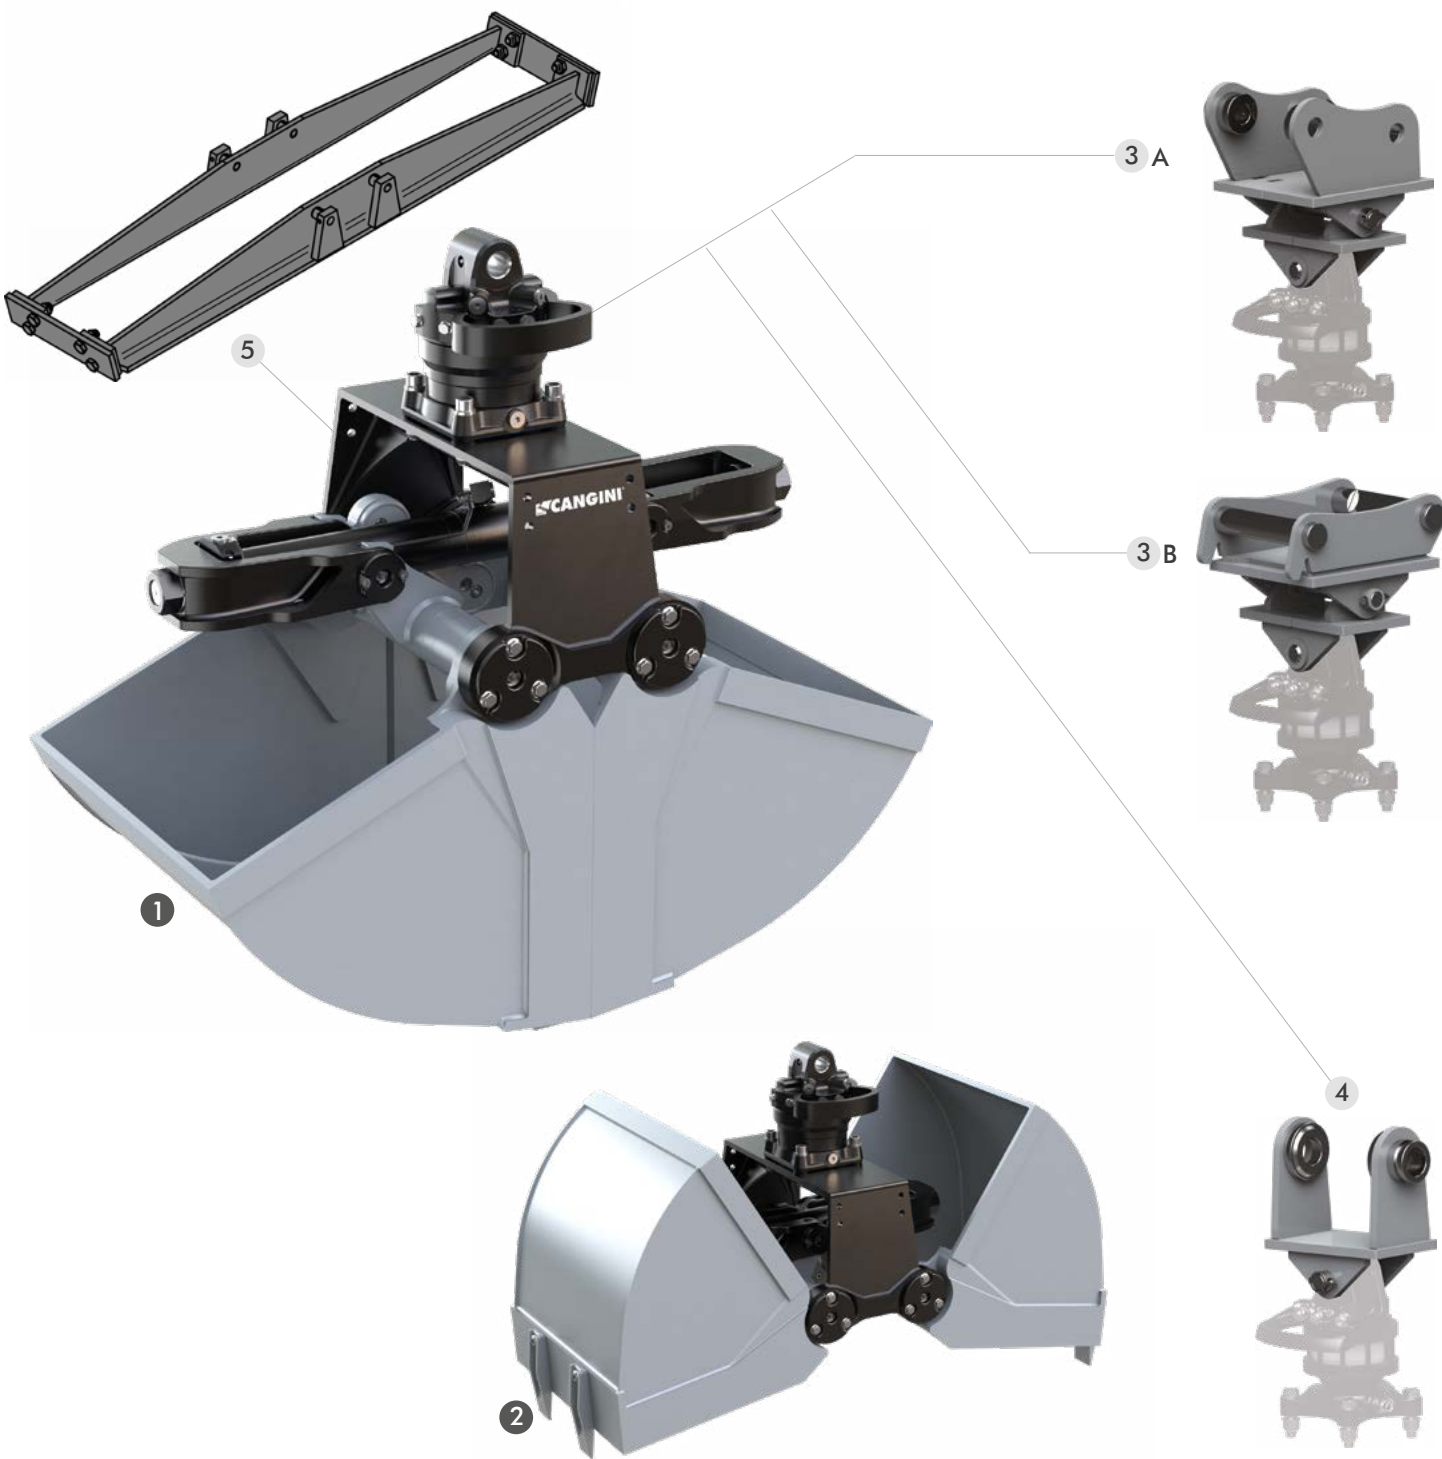

STANDARD TECHNICAL FEATURES


- 1 CLAWS IN HB500 STEEL
- 2 DF TEETH

OPTIONAL

- 3 DOUBLE PIN COUPLING (A) OR ADAPTOR (B)
- 4 SINGLE PIN COUPLING
- 5 SCRAPER

IT IS A MECHANISM THAT CAN BE SCREWED TO THE CLAMSHELL BUCKET TO EASIER EMPTY THE SHELLS, ESPECIALLY WHEN WORKING IN STICKY SOILS. DURING THE OPENING PROCESS, THE SCRAPER PUSHES THE MATERIAL OUT OF THE SHELLS.


C02H MASCHINENGEWICHT 1,0 - 2 ,0

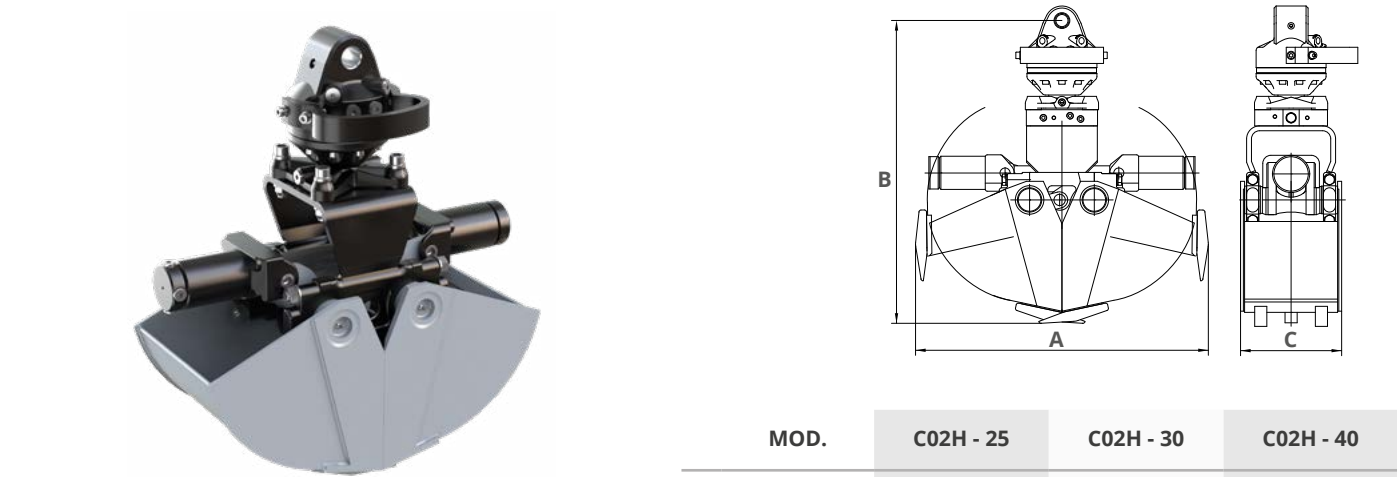

	OHNE AUFNAHME	KG	92	99	112
	ZÄHNE	N.	3	3	4
		KG	1000	1000	1000
	FASSUNGSVERMÖGEN	L	25	30	45
GEBISSZYLINDER					
	MAX.	L/MIN	40	40	40
	MAX.	BAR	200	200	200
ROTATIONSZYLINDER					
	MAX.	L/MIN	50	50	50
	MAX.	BAR	320	320	320

* Gewicht des Löffel ohne Anbauteile und Zähne


C05H MASCHINENGEWICHT 3,0 - 6,0

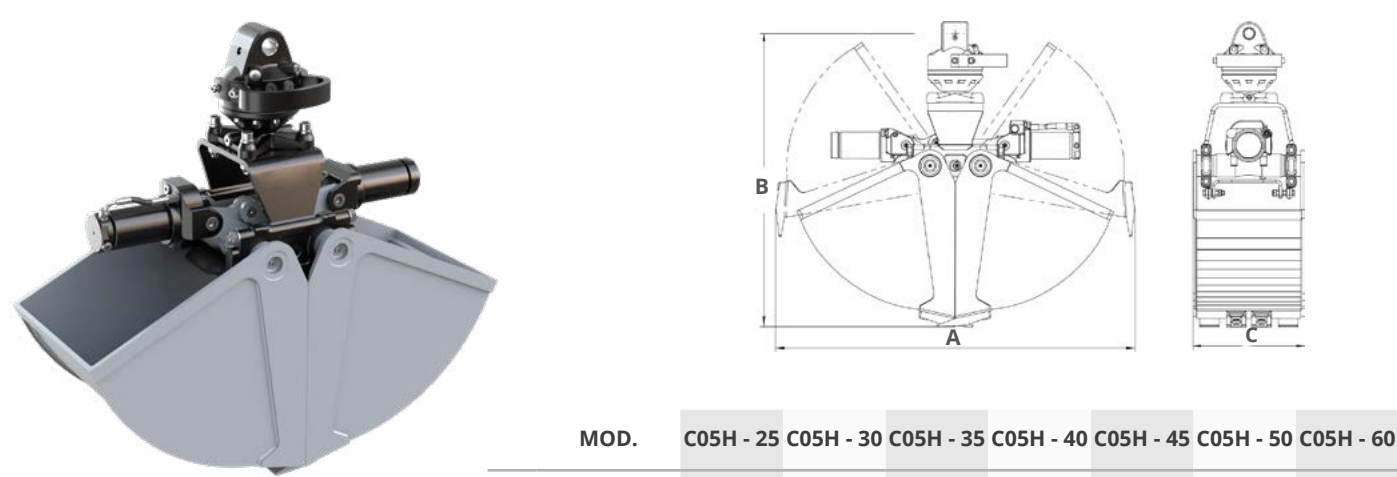

 OHNE AUFNAHME	MOD.	C05H - 25	C05H - 30	C05H - 35	C05H - 40	C05H - 45	C05H - 50	C05H - 60
	A	MM	1090	1090	1090	1090	1090	880
 ZÄHNE	B	MM	930	930	930	930	930	825
	C	MM	250	300	350	400	450	600
 FASSUNGSVERMÖGEN		KG	140	150	160	165	170	175
		N.	3	3	4	4	4	5
 GEBISSZYLINDER		KG	2000	2000	2000	2000	2000	2000
		L	70	85	100	115	130	140
 MAX.	L/MIN	75	75	75	75	75	75	75
	BAR	260	260	260	260	260	260	260
 MAX.								
 ROTATIONSZYLINDER		50	50	50	50	50	50	50
	BAR	320	320	320	320	320	320	320
 MAX.								

* Gewicht des Löffel ohne Anbauteile und Zähne



C08H MASCHINENGEWICHT 4,0 - 9,0

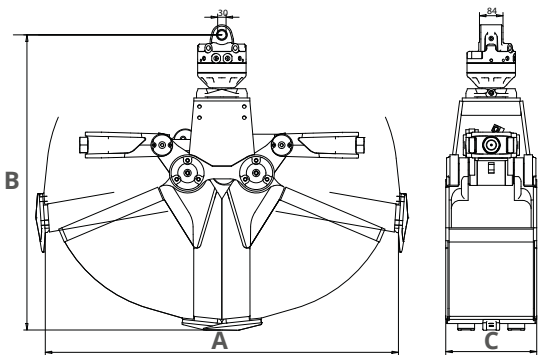

 OHNE AUFNAHME	MOD.		C08H - 32	C08H - 40	C08H - 50	C08H - 60	C08H - 80
	A	MM	1260	1260	1260	1260	1260
 ZÄHNE	B	MM	1060	1060	1060	1060	1060
	C	MM	325	400	500	600	800
 FASSUNGSVERMÖGEN		KG	240	260	280	295	330
		N.	3	3	5	5	9
		KG	3000	3000	3000	3000	3000
		L	115	145	185	220	300
GEBISSZYLINDER							
 MAX.	L/MIN		90	90	90	90	90
 MAX.	BAR		320	320	320	320	320
ROTATIONSZYLINDER							
 MAX.	L/MIN		50	50	50	50	50
 MAX.	BAR		320	320	320	320	320

* Gewicht des Löffel ohne Anbauteile und Zähne


C10H MASCHINENGEWICHT 6,0 - 10,0

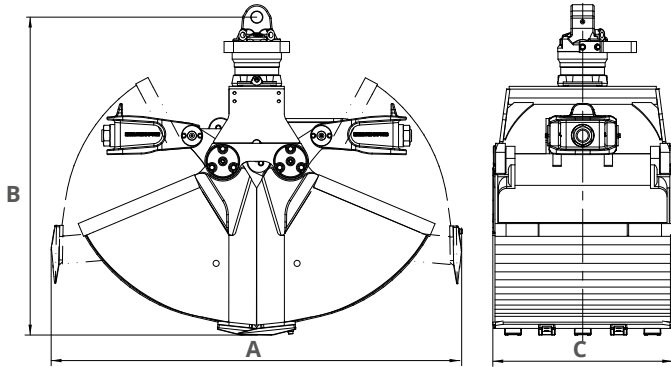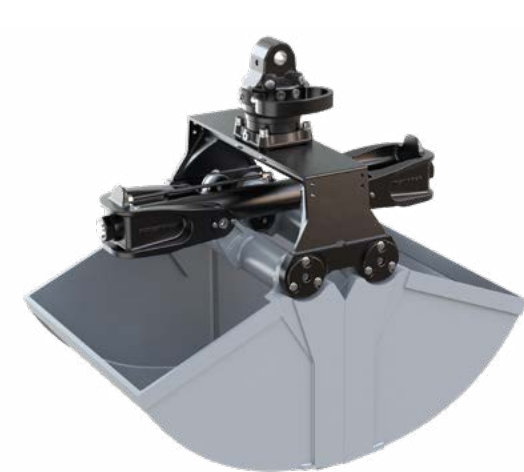

 OHNE AUFNAHME	MOD.		C10H - 40	C10H - 50	C10H - 65	C10H - 80	C10H - 100	C10H - 120
	A	MM	1425	1425	1425	1425	1425	1425
 ZÄHNE	B	MM	1150	1150	1150	1150	1150	1150
	C	MM	400	500	650	800	1000	1200
 FASSUNGSVERMÖGEN		KG	285	305	320	345	375	400
		N.	3	5	5	9	9	9
		KG	3000	3000	3000	3000	3000	3000
		L	170	220	290	355	450	540
GEBISSZYLINDER								
 MAX.	L/MIN		120	120	120	120	120	120
 MAX.	BAR		320	320	320	320	320	320
ROTATIONSZYLINDER								
 MAX.	L/MIN		50	50	50	50	50	50
 MAX.	BAR		320	320	320	320	320	320

* Gewicht des Löffel ohne Anbauteile und Zähne


C12VE MASCHINENGEWICHT 9,0 - 12,0

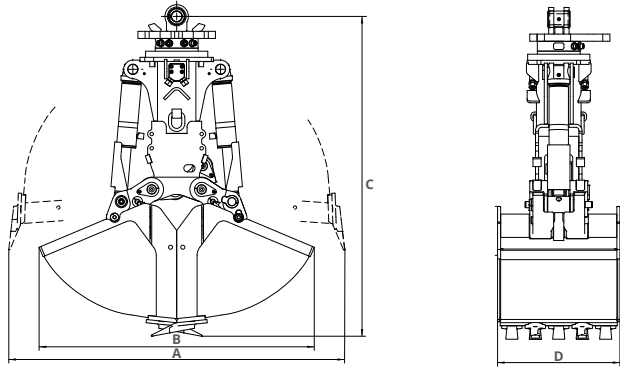

	OHNE AUFNAHME	KG	475	485	500	515	525	535
	ZÄHNE	N.	3	3	5	5	7	9
		KG	4500	4500	4500	4500	4500	4500
	FASSUNGSVERMÖGEN	L	125	160	200	245	285	330
GEBISSZYLINDER								
	MAX.	L/MIN	120	120	120	120	120	120
	MAX.	BAR	320	320	320	320	320	320
ROTATIONSZYLINDER								
	MAX.	L/MIN	50	50	50	50	50	50
	MAX.	BAR	320	320	320	320	320	320

AUSTAUSCHBARES GEBISS FÜR C12VE

GREIFSCHAUFEL



MOD.	BREITE (MM)	ÖFFNUNG (MM)	KOMPLETTE HÖHE (MM)	VOLUMEN (L)	ZÄHNE (N.)	GEWICHT SCHALE (KG)	LADEKAPAZITÄT (KG)	SCHLIESSKRAFT (kN)
C12VE-32S	325	1535	1570	125	3	130	4500	39
C12VE-40S	400	1535	1570	160	3	140	4500	39
C12VE-50S	500	1535	1570	200	5	165	4500	39
C12VE-60S	600	1535	1570	245	5	180	4500	39
C12VE-70S	700	1535	1570	285	7	205	4500	39
C12VE-80S	800	1535	1570	330	9	225	4500	39

* Gewicht des Löffel ohne Anbauteile und Zähne



* Gewicht des Löffel ohne Anbauteile und Zähne