




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

EQUIPPED WITH ANTI-SHOCK VALVES. HYDRAULIC ANGLE ADJUSTMENT OF $\pm 30^\circ$, SELF-LEVELLING TO THE ROAD OF $\pm 10^\circ$ AND ADJUSTABLE SHOES. ENTIRE MOLDBOARD OVERTURNING IN CASE OF COLLISION AND SPRING RETURN.

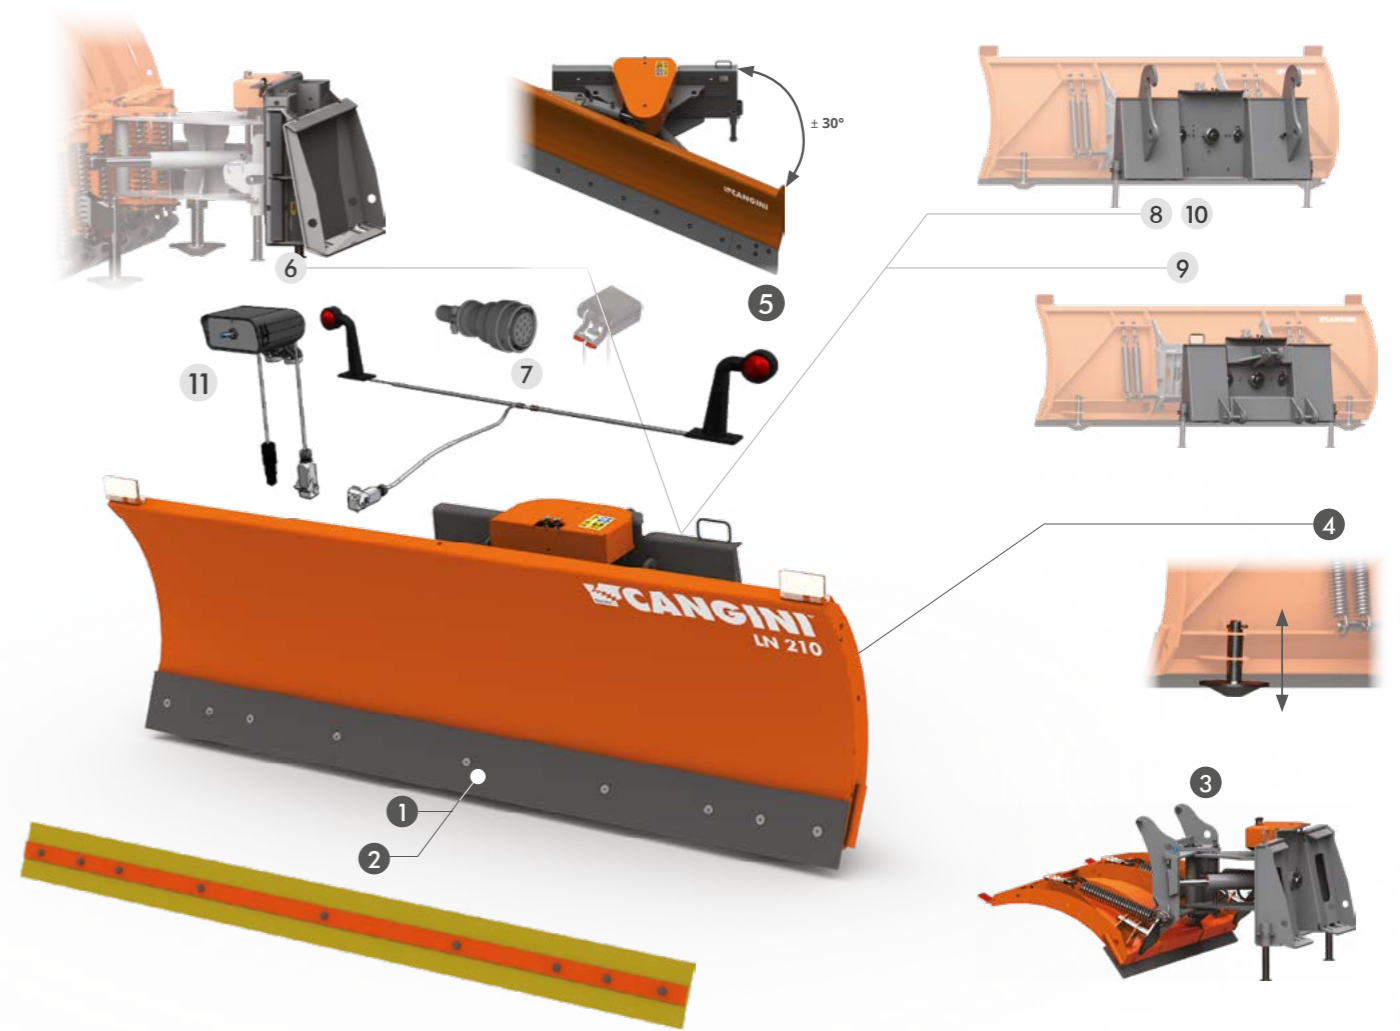

STANDARD TECHNICAL FEATURES

- 1 INTERCHANGEABLE REVERSIBLE BLADE.**
BOLTED-IN REVERSIBLE HB400 BLADE.
- 2 POLYURETHANE BLADE**
SUITABLE FOR SURFACES THAT OTHERWISE MIGHT BE DAMAGED.
- 3 MOLDBOARD OVERTURNING AND SPRING RETURN**
IN CASE OF A SHOCK THE ENTIRE MOLDBOARD OVERTURNS THUS ALLOWING TO OVERCOME THE OBSTACLE.
- 4 ADJUSTABLE SHOES**
THE HEIGHT BETWEEN THE BLADE AND THE GROUND SURFACE CAN BE ADJUSTED.
- 5 ANGLE SIDE HYDRAULIC TILTING ADJUSTMENT OF $\pm 30^\circ$**
HYDRAULIC ADJUSTMENT UP TO MAX. $\pm 30^\circ$ OF THE BLADE HORIZONTAL TILTING ANGLE ON BOTH SIDES.

NB : THE EQUIPMENT IS SUPPLIED COMPLETE WITH PIPES AND CONNECTIONS

OPTIONAL

- 6 COMPACT FLOATING SYSTEM**
IT ENABLES THE BLADE TO FOLLOW THE FEATHER-EDGE WITHOUT MANUAL ADJUSTMENT OF ITS POSITION.
- 7 OVERALL BLADE WIDTH LIGHT KIT**
THE SIDE DIMENSIONS OF THE BLADE ARE VISUALLY PERCEIVED. **THE STANDARD 14/8 PIN PLUG IS SUPPLIED WITH DUST-CONTROL SYSTEM***
- 8 COUPLING SYSTEM FOR WHEEL LOADERS, BACKHOE LOADERS AND TELEHANDLERS**
- 9 3-POINT LINKAGE**
- 10 ARTICULATED LOADERS HITCH**
IT'S POSSIBLE TO ADD THE HITCH FOR ARTICULATED LOADERS TO THE SKID LOADER HITCH PROVIDED WITH THE STANDARD EQUIPMENT
- 11 ELECTRIC KIT**

*THE PLUG IS SUPPLIED DISASSEMBLED, IF NO INFORMATION ON THE PLUG WIRING IS PROVIDED, PLEASE CHECK THAT THE MAIN MACHINE IS EQUIPPED WITH A 14/8-PIN MULTIPOLE SOCKET. ON THE CONTRARY, TH ELECTRICAL KIT IS REQUIRED.

MOD.	LN 130	LN 160	LN 185	LN 210	LN 250	LN 250HD	LN 270HD	LN 290HD	LN 310HD	
A MM (IN)	700 (28)	700 (28)	700 (28)	700 (28)	700 (28)	900 (35)	900 (35)	900 (35)	900 (35)	
B MM (IN)	810 (32)	810 (32)	810 (32)	810 (32)	810 (32)	740 (29)	740 (29)	740 (29)	740 (29)	
C MM (IN)	1305 (51)	1605 (63)	1855 (73)	2105 (83)	2505 (99)	2505 (99)	2705 (106)	2905 (114)	3105 (122)	
WIDTH AT 15°	MM (IN)	1125 (44)	1385 (55)	1605 (63)	1820 (72)	2165 (85)	2165 (85)	2350 (93)	2510 (99)	2690 (106)
W/O COUPLER	KG (LB)	285 (628)	300 (661)	315 (694)	330 (728)	355 (783)	665 (1466)	685 (1510)	700 (1543)	720 (1587)
MAX.	BAR (PSI)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	280 (4062)

