





NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE FORESTRY MULCHER HAS BEEN DESIGNED TO MANAGE THE HEAVIEST WORKLOADS: THE DEEP CLEARING OF WOODS AND FORESTS. IT IS EQUIPPED WITH A PISTON ENGINE TO RUN AT THE MOST INTENSE WORK PACE. THE EXCAVATOR-TYPE MULCHER CAN REACH THE NARROWEST AREAS.

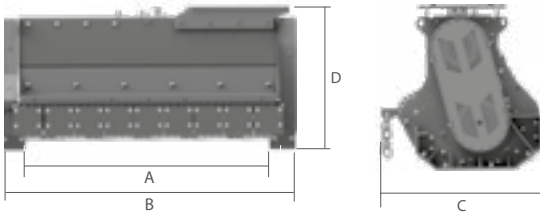

	TONS (LB)	10,0 - 15,0 (22046,2-33069,3)		14,0 - 20,0 (30864,7-44092,5)		
MOD.		TX5-100	TX5-120	TX6-110	TX6-130	TX6-150
MM (IN)		1015 (39,96)	1280 (50,39)	1150 (45,2)	1350 (53,14)	1550 (61,02)
MM (IN)		1300 (51,18)	1540 (60,62)	1520 (59,8)	1740 (68,5)	1950 (76,7)
MM (IN)		720 (28,34)	720 (28,34)	760 (29,9)	760 (29,9)	760 (29,9)
MM (IN)		740 (29,13)	740 (29,13)	910 (35,8)	910 (35,8)	910 (35,8)
KG (LB)		680 (1499)	760 (1676)	1090 (2403)	1180 (2822)	1280 (2822)
KG (LB)		677 (1493)	755 (1665)	1085 (2392)	1175 (2590)	1275 (2811)
KG (LB)		550 (1213)	610 (1345)	1010 (2227)	1100 (2425)	1180 (2601)
MM (IN)		220 (8,66)	220 (8,66)	280 (11)	280 (11,02)	280 (11,02)
N.		3	3	4	4	4
CC		23-46	23-46	32-64	32-64	32-64
MM (IN)		405 (16)	405 (16)	460 (18)	460 (18)	460 (18)
L/MIN (GAL/MIN)	MIN	90 (24)	90 (24)	110 (16)	110 (29)	110 (29)
L/MIN (GAL/MIN)	MAX	300 (79)	300 (79)	300 (79)	300 (79)	300 (79)
BAR (PSI)	MAX	400 (5801)	400 (5801)	400 (5801)	400 (5801)	400 (5801)

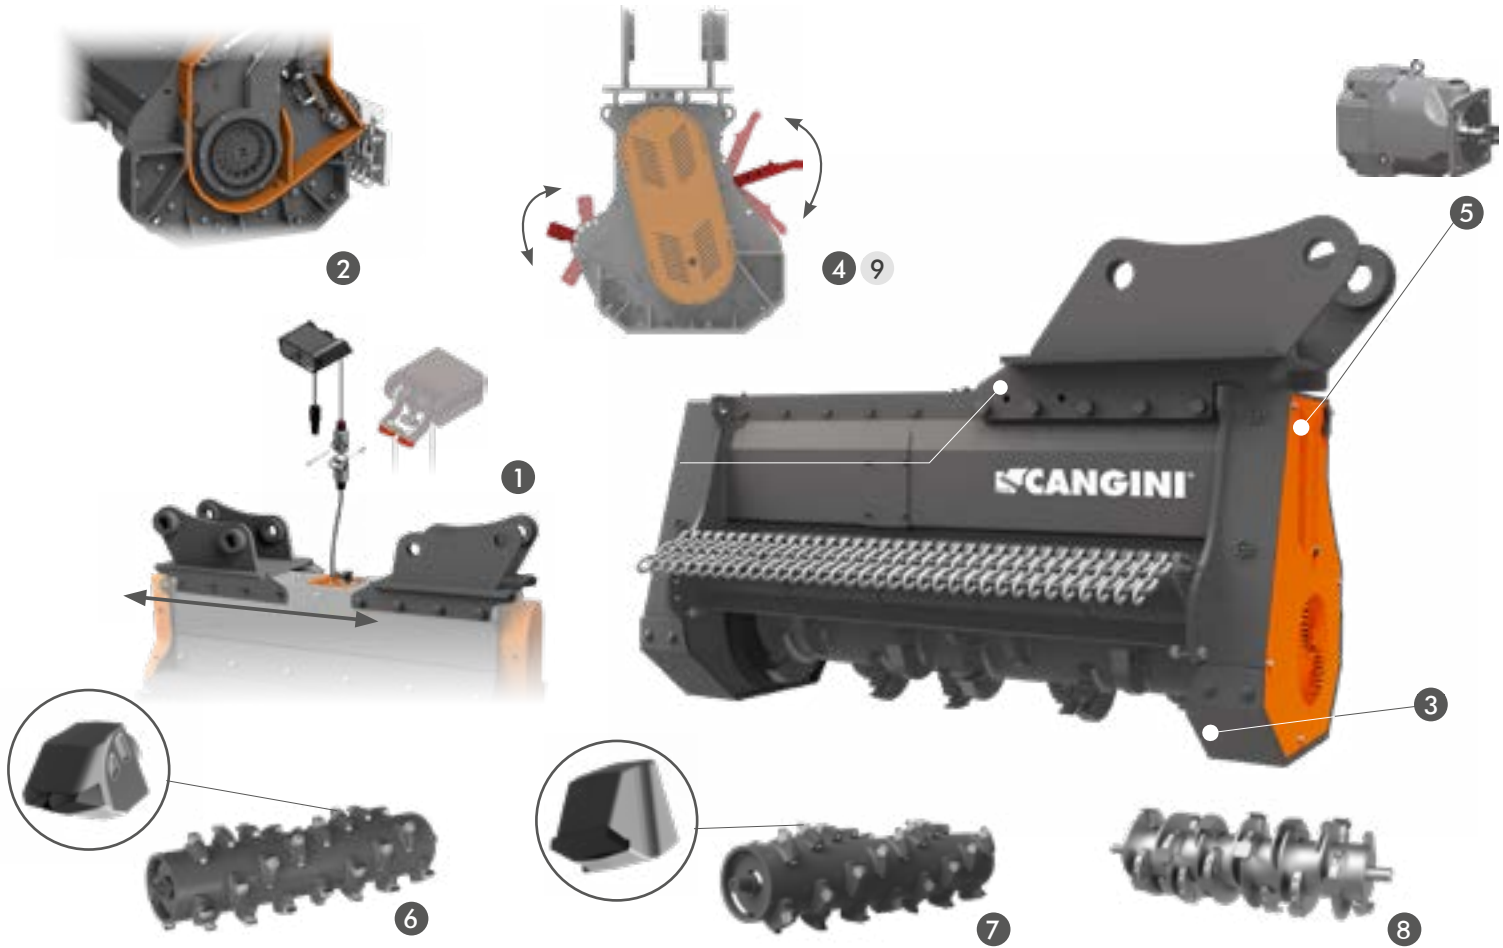

STANDARD TECHNICAL FEATURES

- MECHANICAL COUPLING ADJUSTMENT**
THE COUPLING TO THE MACHINE MAY BE PLACED ALONG THE SURFACE OF THE MULCHER DEPENDING ON THE CUSTOMER'S REQUIREMENTS.
- AUTOMATIC COOLING SYSTEM**
IT IS EQUIPPED WITH A FORCED-AIR VENTILATION SYSTEM TO HELP REDUCE OVERHEATING OF THE MULCHER'S HYDRAULIC COMPONENTS.
- HB400 REINFORCED SKIDS**
- MECHANICAL FLAPS OPENING**
IT ENHANCES THE ROTOR POWER TO DEEPLY CRUSH TRUNKS.
- PISTON ENGINE (VARIABLE CC ENGINE CAPACITY)**
IT NEEDS THE DIRECT DRAINING PIPE TO THE TANK.
- FORESTRY ROTOR FOR GENERAL USE**
THIS TYPE OF ROTOR IS VERSATILE AND SUITABLE FOR MULTIPLE USES, WITH A HIGH IMPACT RESISTANCE.
- FORESTRY ROTOR CUTTING TOOL**
IS SUITABLE FOR PARTICULARLY HEAVY-DUTY WORK DUE TO ITS AGGRESSIVE PROFILE MORE SENSITIVE TO IMPACTS
- WOOD CHIPS**
THE ROTOR IS HIGHLY VERSATILE AND SUITABLE FOR MULTIPLE USES FROM CUTTING BRUSHWOOD TO TREE GRINDING. IT ALLOWS CUTTING FROM A DIAMETER OF 22CM UP TO A MAXIMUM OF 28CM DEPENDING ON THE MODEL USED.

OPTIONAL

- HYDRAULIC FLAPS OPENING**
IT ALLOWS THE OPENING OF THE SINGLE FLAP DIRECTLY FROM THE CAB (THANKS TO A CONTROL KIT WITH MAGNETS TO EASILY PUT IT INSIDE THE CAB) TO ENHANCE THE ROTOR POWER TO DEEPLY CRUSH TRUNKS UP TO 220 MM.

NB: ADAPTERS NOT INCLUDED
THE MACHINE CONNECTION PLATE IS INCLUDED FOR ALL THE ADAPTERS IN CANGINI CATALOGUE EXCEPT FOR MOD. ADAPTERS CS 100 JANUS PRO, CW 20S, CW30S.