




AF



AR



CS



CR



CS JANUS PRO



M'LOCK




CW

ADAPTERS



ITS TRAPEZOIDAL SHAPE AND SIDE TILTING ANGLES (52°-60°) ENABLE THE REALIZATION AND MAINTENANCE OF DITCHES AND DRAINS OF DIFFERENT SIZES AND ANGLES.

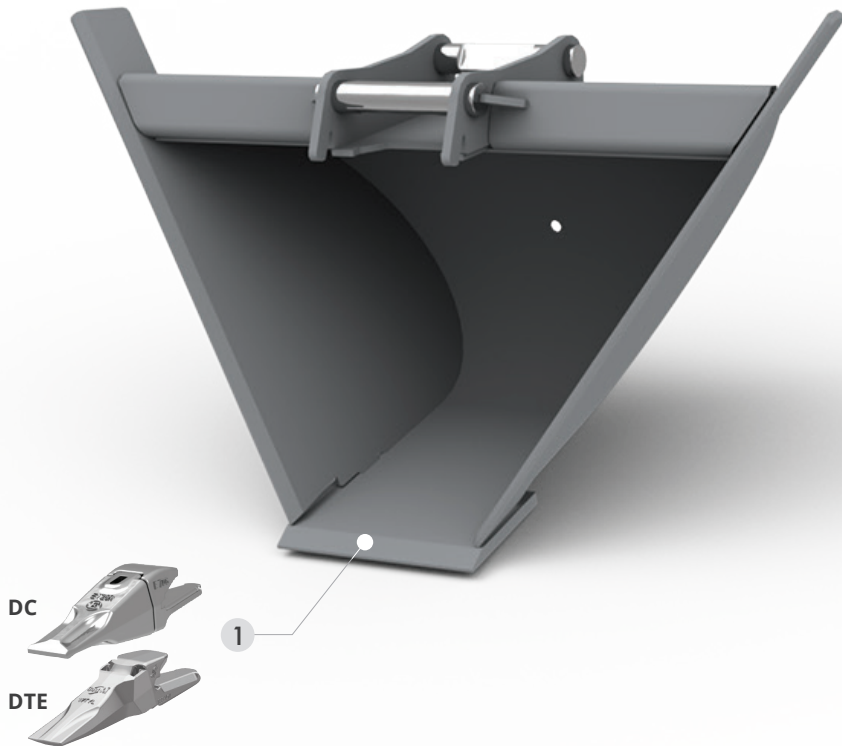

OPTIONAL

- 1
- DC TEETH
- DTE TEETH

MOD.	T38	T45	T53	T62	T67	T73	T80	MIDI		EXCAVATOR	
								T85 GD	T92 GD	T100 GD	T110 GD
TONS (LB)	0,6 - 1,8 (1323 - 3968)	1,8 - 2,5 (2646 - 5512)	2,5 - 4,0 (5512 - 8818)	4,0 - 5,0 (8818 - 11023)	5,0 - 7,5 (11023 - 16535)	7,5 - 10,0 (16535 - 22046)	10,0 - 12,0 (22046 - 26455)	12,0 - 14,0 (26455 - 30865)	12,0 - 14,0 (26455 - 30865)	14,0 - 18,0 (30865 - 39683)	18,0 - 22,0 (39683 - 48502)

T38

MACHINE WEIGHT 0,6 - 1,8 t (1323 - 3968 lb)

ADAPTERS

AR15

KG 7 (LB 15)

CS10

KG 10 (LB 22)

CS10 JANUS PRO

KG 10 (LB 22)

CR15

KG 10 (LB 22)

M'LOCK30

KG 10 (LB 22)

CW00

KG 5 (LB 11)

CW05

KG 9 (LB 19)

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
200 (8)	607 (23,9)	52°	27 (60)	47 (12,4)	AF - AR - CS
					CR - CM
					CW - CS JANUS PRO
200 (8)	490 (19,3)	60°	24 (53)	37 (9,8)	AF - AR - CS
					CR - CM
					CW - CS JANUS PRO

OPTIONAL

1 DC 1

KG 1,4

1 DTE 13

KG 1,7

T45

MACHINE WEIGHT 1,8 - 2,5 t (3968 - 5512 lb)

ADAPTERS

AR30

KG 10 (LB 22)

CS10

KG 10 (LB 22)

CS30

KG 18 (LB 39)

CS10 JANUS PRO

KG 10 (LB 22)

CS30 JANUS PRO

KG 19 (LB 41)

CR30

KG 13 (LB 28)

M'LOCK30

KG 12 (LB 26)

CW05

KG 9 (LB 19)

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
250 (10)	741 (29,2)	52°	45 (99)	77 (22,3)	AF - AR - CS
					CR - CM
					CW - CS JANUS PRO
250 (10)	600 (23,6)	60°	40 (88)	63 (16,6)	AF - AR - CS
					CR - CM
					CW - CS JANUS PRO

OPTIONAL

1 DC 1

KG 1,4

1 DTE 13

KG 1,7

T53

MACHINE WEIGHT 2,5 - 4,0 t (5512 - 8818 lb)

ADAPTERS

AR40

KG 11 (LB 24)

CS30

KG 18 (LB 39)

CS30 JANUS PRO

KG 19 (LB 41)

CR40

KG 14 (LB 30)

M'LOCK30

KG 12 (LB 26)

CW05

KG 9 (LB 19)

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
300 (12)	868 (34,2)	52°	69 (152)	140 (37,0)	AF - AR - CS
					CR - CM
					CW - CS JANUS PRO
300 (12)	705 (27,8)	60°	61 (134)	114 (30,1)	AF - AR - CS
					CR - CM
					CW - CS JANUS PRO

OPTIONAL

1 DC 3

KG 2,1

1 DTE 17

KG 3,0

T62

MACHINE WEIGHT 4,0 - 5,0 t (8818 - 11023 lb)

ADAPTERS

AR50

KG 17 (LB 37)

CS30

KG 18 (LB 39)

CS30 JANUS PRO

KG 19 (LB 41)

CR50

KG 22 (LB 48)

M'LOCK100

KG 35 (LB 77)

CW10

KG 23 (LB 50)

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
300 (12)	985 (38,8)	52°	101 (223)	190 (50,2)	AF - AR - CS
					CR - CM
					CW - CS JANUS PRO
300 (12)	790 (31,1)	60°	88 (194)	153 (40,4)	AF - AR - CS
					CR - CM
					CW - CS JANUS PRO

OPTIONAL

1 DC 6

KG 4,0

1 DTE 17

KG 3,0

* weight of the tank excluding attachment

* weight of the tank excluding attachment

T67 MACHINE WEIGHT 5,0 - 7,5 t (11023 - 16535 lb)

ADAPTERS

AR50

KG 17 (LB 37)

AR70

KG 24 (LB 52)

CS80

KG 44 (LB 97)

CS80 JANUS PRO

KG 46 (LB 101)

CR50

KG 22 (LB 48)

CR70

KG 34 (LB 75)

M'LOCK100

KG 35 (LB 77)

CW10

KG 23 (LB 50)

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
350 (14)	1087 (42,8)	52°	144 (317)	239 (63,1)	AF - AR - CS
					CR - CM
					CW - CS JANUS PRO
350 (14)	876 (34,5)	60°	126 (278)	191 (50,5)	AF - AR - CS
					CR - CM
					CW - CS JANUS PRO

OPTIONAL

1 DC 8

KG 5,4

1 DTE 17

KG 3,0

T73 MACHINE WEIGHT 7,5 - 10,0 t (16535 - 22046 lb)

ADAPTERS

CS80

KG 44 (LB 97)

CS80 JANUS PRO

KG 46 (LB 101)

CR70

KG 34 (LB 75)

M'LOCK100

KG 35 (LB 77)

CW10

KG 23 (LB 50)

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
350 (14)	1157 (45,6)	52°	166 (366)	318 (84,0)	AF - CS
					CR - CM
					CW - CS JANUS PRO
350 (14)	928 (36,5)	60°	146 (322)	254 (67,1)	AF - CS
					CR - CM
					CW - CS JANUS PRO

OPTIONAL

1 DC 8

KG 5,4

1 DTE 19

KG 5,6

T80 MACHINE WEIGHT 10,0 - 12,0 t (22046 - 26455 lb)

ADAPTERS

CS80

KG 44 (LB 97)

CS80 JANUS PRO

KG 46 (LB 101)

CR70

KG 34 (LB 75)

M'LOCK100

KG 66 (LB 145)

CW20

KG 57 (LB 126)

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
350 (14)	1236 (48,7)	52°	207 (456)	355 (93,8)	AF - CS
					CR - CM - CS JANUS PRO
					CW
350 (14)	985 (38,8)	60°	184 (406)	281 (74,2)	AF - CS
					CR - CM - CS JANUS PRO
					CW

OPTIONAL

1 DC 11

KG 7,7

1 DTE 19

KG 5,6

T85 GD MIDI MACHINE WEIGHT 12,0 - 14,0 t (26455 - 30865 lb)

ADAPTERS

CS100

KG 45 (LB 99)

CS100 JANUS PRO

KG 93 (LB 205)

M'LOCK100

KG 66 (LB 145)

CW20

KG 57 (LB 126)

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
350 (14)	1420 (56)	52°	320 (705)	430 (113,6)	AF - CM
					CS - CW
					CS JANUS PRO
350 (14)	1120 (44)	60°	275 (606)	370 (97,7)	AF - CM
					CS - CW
					CS JANUS PRO

OPTIONAL

1 DC 11

KG 7,7

1 DTE 19

KG 5,6

* weight of the tank excluding attachment

* weight of the tank excluding attachment

T92 GD EXCAVATOR

MACHINE WEIGHT 12,0 - 14,0 t (26455 - 30865 lb)

ADAPTERS

CS100



KG 45 (LB 99)

A

CS100 JANUS PRO



KG 93 (LB 205)

M'LOCK100




KG 66 (LB 145)

CW20



KG 57 (LB 126)

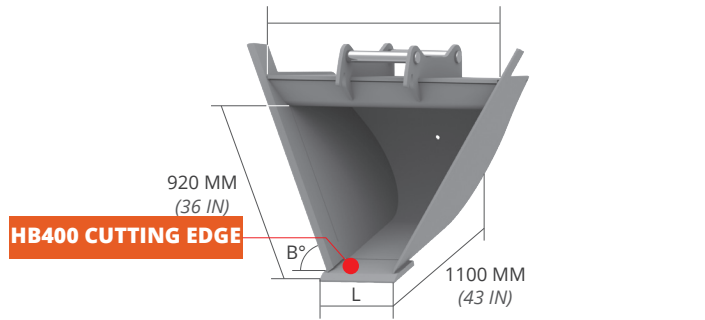

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
400 (16)	1550 (48)	52°	400 (882)	540 (142,7)	AF - CM
					CS - CW
					CS JANUS PRO
400 (16)	1230 (48)	60°	340 (750)	470 (124,2)	AF - CM
					CS - CW
					CS JANUS PRO

OPTIONAL

1

DC 13

KG 13



1

DTE 23

KG 8,8



T100 GD

MACHINE WEIGHT 14,0 - 18,0 t (30865 - 39683 lb)

ADAPTERS

CS100



KG 45 (LB 99)

A

CS100 JANUS PRO



KG 93 (LB 205)

M'LOCK100




KG 66 (LB 145)

CW30



KG 66 (LB 145)

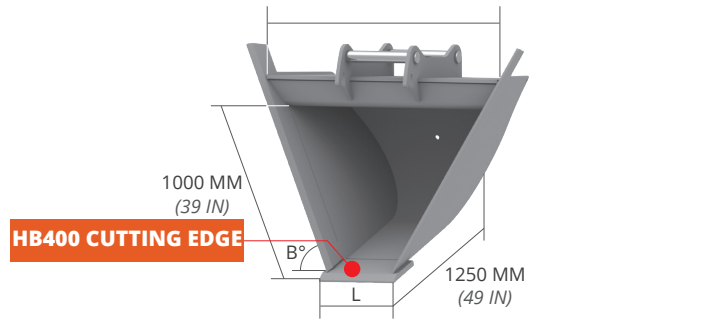

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
400 (16)	1680 (66)	52°	530 (1168)	680 (179,6)	AF - CM
					CS - CW
					CS JANUS PRO
400 (16)	1320 (52)	60°	455 (1003)	585 (154,5)	AF - CM
					CS - CW
					CS JANUS PRO

OPTIONAL

1

DC 15

KG 16,1



1

DTE 29

KG 12,5



T110 GD

MACHINE WEIGHT 18,0 - 22,0 t (39683 - 48502 lb)

ADAPTERS

CS100



KG 45 (LB 99)

A

CS100 JANUS PRO



KG 93 (LB 205)

M'LOCK100




KG 66 (LB 145)

CW30



KG 66 (LB 145)

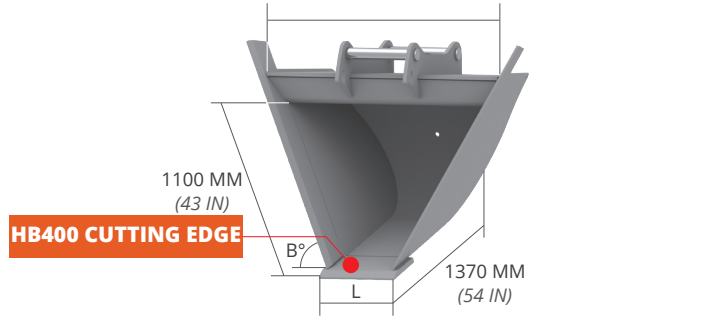

L MM (IN)	A MM (IN)	B°	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
400 (16)	1820 (72)	52°	660 (1455)	870 (229,8)	AF - CM
					CS - CW
					CS JANUS PRO
400 (16)	1100 (43)	60°	565 (1246)	740 (195,5)	AF - CM
					CS - CW
					CS JANUS PRO

OPTIONAL

1

DC 15

KG 16,1



1

DTE 33

KG 18,1



* weight of the tank excluding attachment

* weight of the tank excluding attachment