



BTC SHARP-CUT BRANCH CUTTER BAR
FOR EXCAVATOR







HB450




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

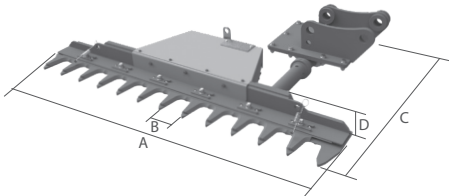SUITABLE FOR THE TREE PRUNING UP TO 100 MM (3,9 IN). IT DOES NOT HARM THE PLANT, BECAUSE IT CUTS SHARPLY AND PRECISELY WITHOUT UPROOTING THE BRANCH. THE BAR'S BLADES IN HB450 GRANT RESISTANCE AND EXTENDED USEFUL LIFE.



	W/O COUPLER	KG (LB)	185 (407)	200 (440)	255 (562)	275 (606)	300 (661)
	MAX.	BAR (PSI)	250 (3626)	250 (3626)	250 (3626)	250 (3626)	250 (3626)
	WORKING OIL FLOW RATE	L/MIN (GAL/MIN)	≈50 (13,2)	≈50 (13,2)	≈60 (15,8)	≈60 (15,8)	≈60 (15,8)
	BLOWS PER MINUTE	N.	165 - 185	165 - 185	116 - 130	116 - 130	116 - 130

* The strokes per minute vary depending on the volumetric efficiency of the hydraulic system of the machine on which it is installed.

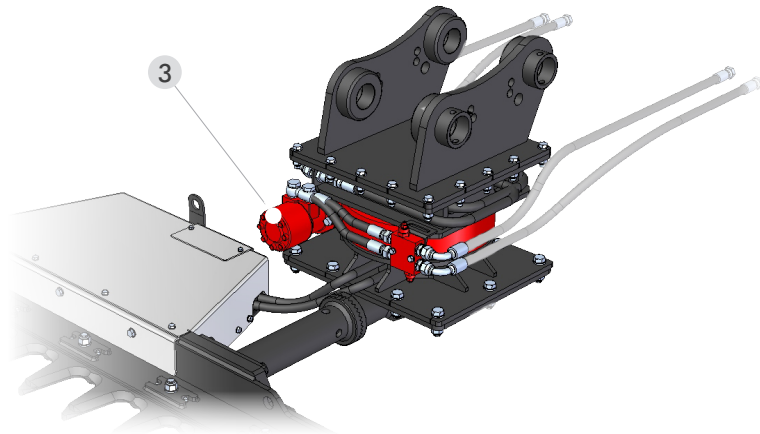

STANDARD TECHNICAL FEATURES

- 1 HB450 BLADE**
HB450 BLADES FOR A HIGHER RESISTANCE TO WEAR.
- 2 REVOLVING JOINT**
THE TOOTHED FLANGE NEXT TO COUPLING AREA ALLOWS TO SETTLE THE TILTING DEGREE ACCORDING TO THE CUSTOMER'S NEED.

OPTIONAL

- 3 4 PIPES HYDRAULIC SLEWING RING**
IT ORIENTS THE BRANCH-CUTTER BAR FOR DIFFERENT NEEDS AND IT ALLOWS TO CUT IN BOTH DIRECTIONS.