




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE HAND'O'LOCK QUICK COUPLER ALLOWS THE FAST REPLACEMENT OF THE ATTACHMENT TOOLS. THANKS TO ITS SIMPLE AND STRONG FRAME IT CAN RELY ON AN EXCELLENT QUALITY-PRICE RATIO. IN ITS HYDRAULIC VERSION WITH ITS **DOUBLE ACTION** SYSTEM, IT ENABLES THE FULLY AUTOMATIC LOCKING AND UNLOCKING OPERATIONS.


MECHANIC

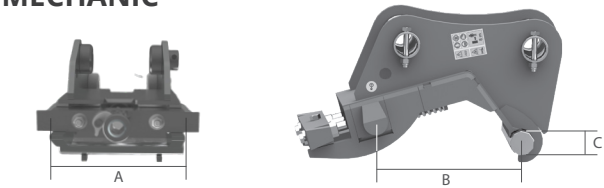

W/O COUPLER

TONS (LB)		0,6 - 1,2 (1323 - 2646)	0,6 - 4,0 (1323 - 8818)	4,0 - 10,0 (8818 - 22046)
MOD.		CW 00	CW 05	CW 10
A	MM (IN)	144 (5,7)	175 (6,9)	305 (12)
B	MM (IN)	150 (5,9)	200 (7,9)	300 (11,9)
C	MM (IN)	30 (1,2)	40 (1,6)	50 (2)
KG (LB)		10 (22)	14 (31)	42 (93)

HYDRAULIC DOUBLE ACTION

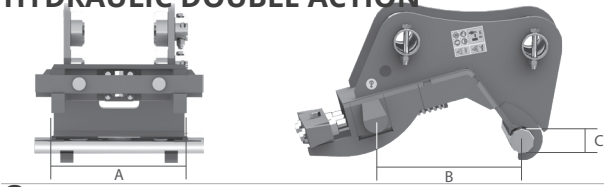

W/O COUPLER  
MAX

TONS (LB)		0,6 - 4,0 (1323 - 8818)	4,0 - 10,0 (8818 - 22046)	7,5 - 15,0 (16535 - 33069)	15,0 - 25,0 (33069 - 55116)
MOD.		CW 05 D.E.	CW 10 D.E.	CW 20S D.E.	CW 20 D.E.
A	MM (IN)	175 (6,9)	305 (12)	420 (16,5)	550 (21,6)
B	MM (IN)	200 (7,9)	300 (11,9)	475 (18,7)	475 (18,7)
C	MM (IN)	40 (1,6)	50 (2)	60 (2,3)	60 (2,3)
KG (LB)		15 (33)	43 (95)	110 (242,5)	180 (396,8)
bar (psi)		250 (3626)	250 (3626)	250 (3626)	250 (3626)
			ON REQUEST	ON REQUEST	



OPTIONAL

1 HYDRAULIC INSTALLATION KIT

WITH THE HYDRAULIC QUICK COUPLER, IT IS POSSIBLE TO SUPPLY THE INSTALLATION KIT TO THE MACHINE, INCLUDING SOLENOID VALVE AND 12V ELECTRIC SELECTOR SWITCH TO BE INSTALLED INSIDE THE DRIVING AREA.

2 LIFTING HOOK

UPON REQUEST, A LOADING HOOK WILL BE FITTED, COVERED WITH AN APPROVAL ON THE CONFORMITY DECLARATION OF OUR PRODUCT.  
**NB\* THE LIFTING CAPACITY OF THE HOOK IS ADJUSTED ACCORDING TO THE SUPPORT TO WHICH THE HOOK IS APPLIED. THIS CAPACITY IS INDICATED IN THE PRODUCT'S OWNER'S MANUAL.**

3 CW ON HINGE

RECOMMENDED APPLICATION ON BUCKETS.

4 CW FOR TILTING BUCKETS

RECOMMENDED APPLICATIONS ON TILTING BUCKETS.

5 REVERSE CW

RECOMMENDED APPLICATION ON FLAT PLATES, SUCH AS ADAPTER PLATES, MULCHERS, SHEARS, ETC.

6 REVERSIBLE CW

RECOMMENDED APPLICATIONS ON BUCKETS USED IN BACK OR FRONT DIGGING WORKS.