


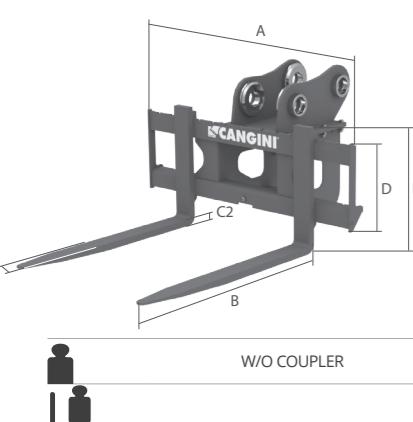

THIS CONFIGURATION ENABLES THE COUPLING TO EXCAVATORS MAKING IT SUITABLE FOR THE HANDLING OF LOADS IN HARD-TO-REACH AREAS. HOWEVER, IT IS IMPORTANT TO CHECK THAT THE EXCAVATOR IS COMPLIANT FOR LIFTING IN ACCORDANCE WITH THE MACHINERY DIRECTIVE.

MOD.	FK10 S	FK10	FK18 S	
A MM (IN)	1150 (45)	1150 (45)	1150 (45)	
B MM (IN)	1000 (39)	1200 (47)	1200 (47)	
C MM (IN)	80 (3,1)	80 (3,1)	100 (3,9)	
C2 MM (IN)	30 (1,2)	30 (1,2)	35 (1,4)	
D MM (IN)	406 (16)	406 (16)	406 (16)	
E MM (IN)	620 (24)	620 (24)	620 (24)	
W/O COUPLER	KG (LB)	170 (375)	182 (401)	210 (463)
	KG (LB)	1000 (2205)	1000 (2205)	1800 (3968)

NB: ADAPTERS NOT INCLUDED

THE MACHINE CONNECTION PLATE IS INCLUDED FOR ALL THE ADAPTERS IN CANGINI CATALOGUE EXCEPT FOR MOD. ADAPTERS CS 100, CS 100 JANUS, CW 20S.