




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

		THE LOG GRAPPLE CAN BE EQUIPPED WITH 360° HYDRAULIC ROTATION, PARTS SUBJECT TO GREATER WEAR ARE MADE OF DOMEX 700. STANDARD EQUIPMENT INCLUDES A BLOCK VALVE ON THE CLOSING CYLINDER.												
		TONS (LB)	1,2 - 1,8 (2646-3968)	1,8 - 3,5 (3968-7716)	3,5 - 4,0 (7716-8818)	4,0 - 5,0 (8818-11023)	5,0 - 7,0 (11023-15432)	7,0 - 8,0 (15432-17637)	8,0 - 10,0 (17637-22046)	10,0 - 12,0 (22046 - 26455)	120-150 (26455-33069)	150-180 (33069-39683)		
		MOD.	WG 1000	WG 1100	WG 1300	WG 1300HD	WG 1500	WG 1750	WG 1650	WG 1800	WG 2000	WG 1800HD	WG 2000HD	
A		MM (IN)	330 (13)	395 (16)	425 (17)	425 (17)	490 (19)	500 (20)	514 (20)	582 (23)	582 (23)	630 (25)	630 (25)	
B		MM (IN)	610 (24)	655 (26)	735 (29)	735 (29)	815 (32)	960 (38)	1030 (41)	1180 (46)	1225 (48)	1180 (46)	1225 (48)	
C		MM (IN)	410 (16)	440 (17)	495 (19)	495 (19)	580 (23)	630 (25)	600 (24)	680 (27)	730 (29)	680 (27)	730 (29)	
D		MM (IN)	650 (26)	695 (27)	790 (31)	790 (31)	850 (33)	985 (39)	935 (37)	1005 (40)	1100 (43)	1005 (40)	1100 (43)	
E		MM (IN)	1090 (43)	1180 (46)	1400 (55)	1400 (55)	1610 (63)	1740 (69)	1650 (65)	1820 (72)	2010 (79)	1820 (72)	2010 (79)	
		W/O COUPLER	KG (LB)	48 (106)	85 (187)	118 (260)	131 (289)	196 (432)	265 (584)	280 (617)	400 (882)	450 (992)	440 (970)	505 (1113)
		MIN.	MM (IN)	70 (2,8)	80 (3,1)	75 (3)	75 (3)	95 (3,7)	120 (4,7)	100 (3,9)	120 (4,7)	150 (5,9)	120 (4,7)	150 (5,9)
		MAX.	L/MIN (GALL/MIN)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)
		MAX.	KG (LB)	500 (1102)	1900 (4189)	2100 (4630)	2100 (4630)	3100 (6834)	3500 (7716)	4000 (8818)	6000 (13228)	6000 (13228)	7000 (15432)	7000 (15432)
		MAX.	BAR (PSI)	100 (1450)	200 (2901)	200 (2901)	200 (2901)	200 (2901)	200 (2901)	230 (3336)	250 (3626)	250 (3626)	250 (3626)	250 (3626)

PRICE NOT INCLUDING THE ROTATOR
(MANDATORY - CHOICE BETWEEN: 4 / 5)

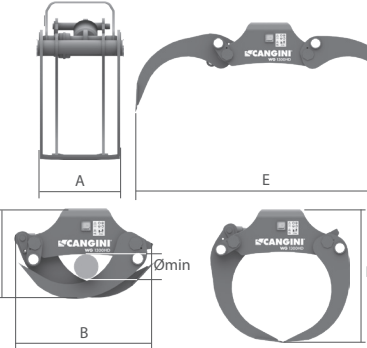

OPTIONAL

1 DOUBLE PIN HITCH (A) OR ADAPTER (B)

2 SINGLE PIN HITCH

3 TWO PIPE KIT

IT ENABLES THEIR ROTATION AND THE JAWS' OPENING AND CLOSING FUNCTIONS EVEN ON MACHINES EQUIPPED WITH A SINGLE HYDRAULIC DOUBLE-EFFECT LINE. CONTROL KIT WITH MAGNETS TO EASILY PUT IT INSIDE THE CAB.

4 BASIC ROTOR

360° SHAFT ROTOR TO DRIVE THE GRABS.

5 FLANGED ROTOR

360° HYDRAULIC FLANGED ROTOR IDEAL FOR HEAVY DUTY JOBS.