





THE BROOM SWEEPER FOR EXCAVATORS IS SUITABLE FOR THE CLEANING OF HORIZONTAL AND VERTICAL SURFACES AND OF AREAS THAT MACHINES WITH FRONTAL ATTACHMENTS CANNOT REACH. IT IS EQUIPPED WITH STABILIZING SHOES TO SAFEGUARD BRUSHES WHEN THE BROOM IS SET TO THE GROUND. STANDARD THROTTLE VALVES AND PRESSURE RELIEF VALVES. THE DIRECT DRIVE ENGINE WITH DISK GEARBOX IS PLACED INSIDE THE BRUSH SHAFT TO REDUCE THE TOOL'S OPERATING OVERALL WIDTH.

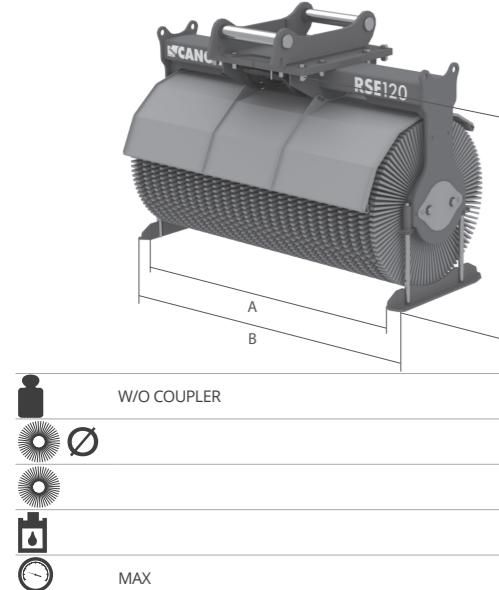

NB: ADAPTERS NOT INCLUDED: THE MACHINE CONNECTION PLATE IS INCLUDED FOR ALL THE ADAPTERS IN CANGINI CATALOGUE EXCEPT FOR MOD. ADAPTERS CS 100, CS 100 JANUS, CW 20S, CW30S.

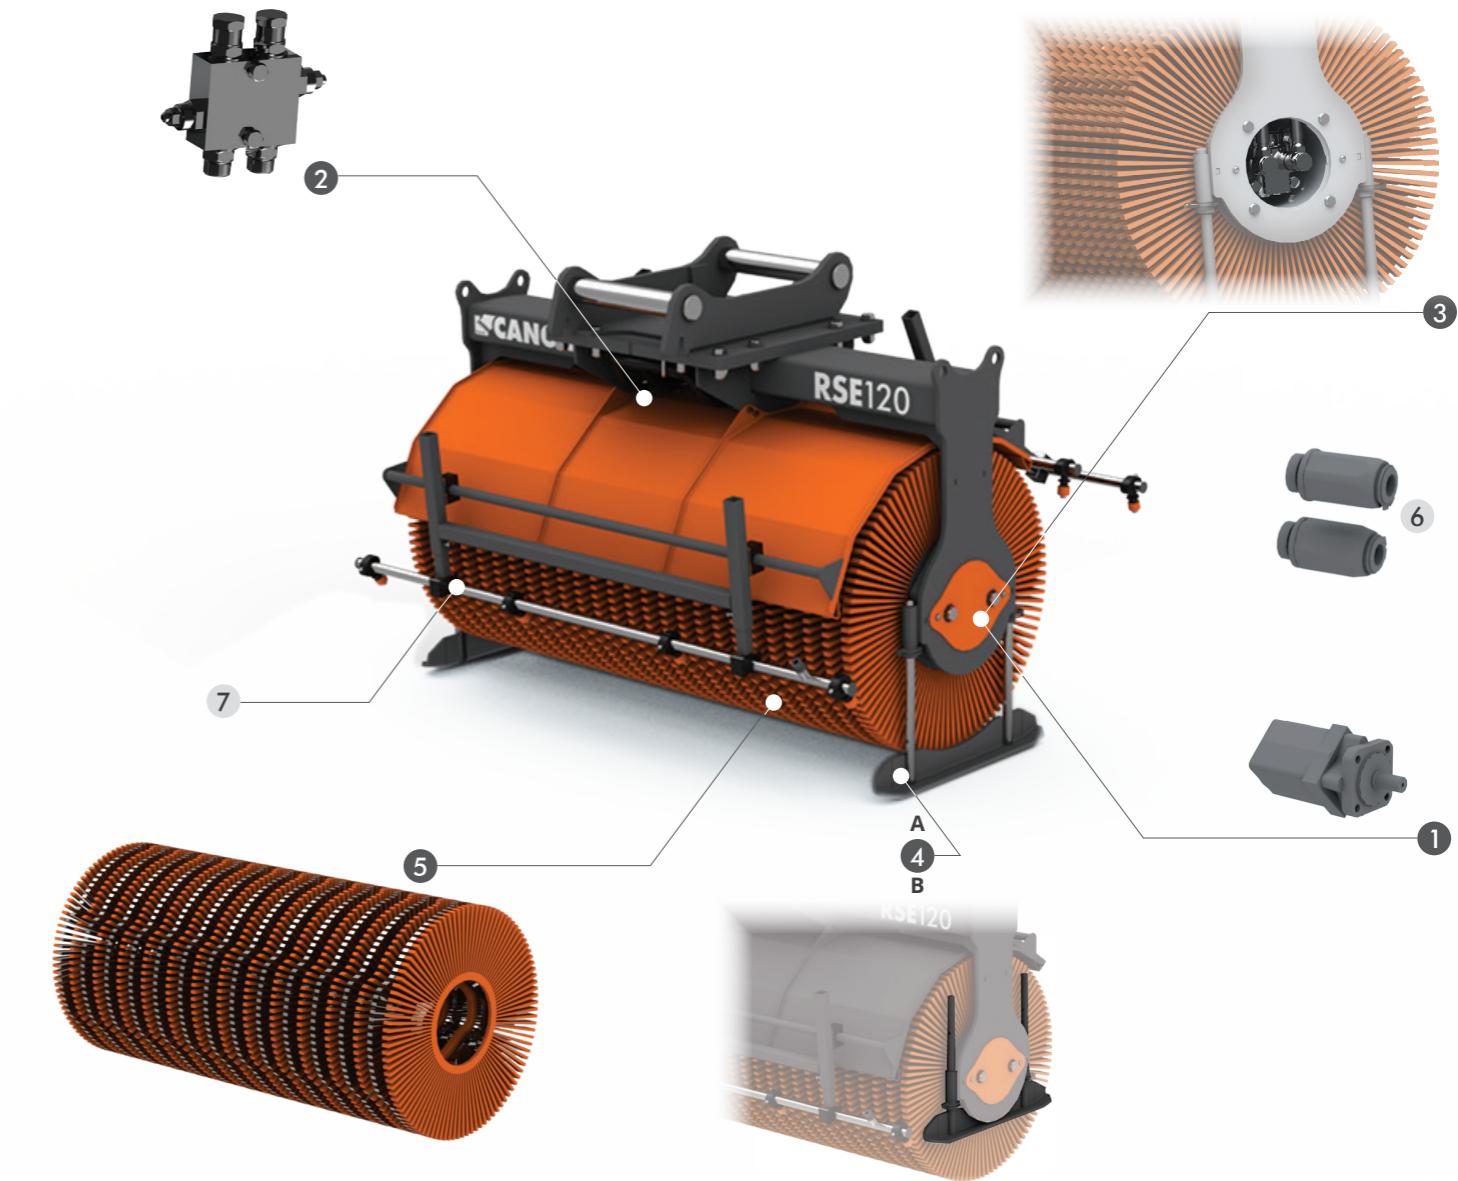

STANDARD TECHNICAL FEATURES

1 ENGINE WITH SQUARE FLANGES AND DISK GEARBOX

2 PRESSURE RELIEF VALVE

THEY PREVENT THE ENGINE FROM PRESSURE PEAKS DURING WORKING PHASES CALIBRATED AT 180 BAR.

3 DIRECT DRIVE ENGINE

THE SOLUTION OF THE DISK GEARBOX ENGINE MOUNTED DIRECTLY ON THE BRUSH SHAFT ALLOWS TO REDUCE THE OVERALL DIMENSIONS OF THE ROLLER CONSIDERABLY AND MAKE IT MORE VERSATILE.

4 ADJUSTABLE STABILIZING SHOES: A) STAND-BY POSITION - B) WORK POSITION

5 PPL + STEEL BRUSH KIT

RECOMMENDED FOR THE CLEANING OF PARTICULARLY ABRASIVE SURFACES.

OPTIONAL

6 FLOWRATE REDUCERS

ADVISED FOR MACHINES WITH OILFLOW HIGHER THAN 70 L/MIN

7 OUTSIDE SPRINKLERS KIT

THIS KIT DOES NOT INCLUDE TANK AND PUMP.