

CS SCHNAPPOMATIC D.E. - EVO




PATENTED



NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE CS SCHNAPPOMATIC D.E. EVO QUICK COUPLER, WITH ITS **DOUBLE ACTION** SYSTEM, MANAGES THE LOCKING AND UNLOCKING OPERATIONS DIRECTLY FROM THE CAB IN A FEW SECONDS. IT IS EQUIPPED WITH THE MOST ADVANCED SAFETY SYSTEMS, SUCH AS: CHANNELLED LUBRICATION, THE PATENTED 'VISUAL CHECK' COUPLING DISPLAY AND ANTI-FALL SYSTEMS COMPLIANT WITH THE UNI EN 474-1:2022 STANDARD.

FULLY HYDRAULIC QUICK COUPLER, REQUIRES FEEDING VIA DOUBLE-ACTING LINE.
IT IS POSSIBLE TO MAKE THE EQUIPMENT REVERSIBLE BY SELECTING THE JANUS ADAPTER. THIS QUICK COUPLER COMBINES WITH ALL TYPES OF ADAPTER OF THE SERIES (MS OS, DS, ETC.).

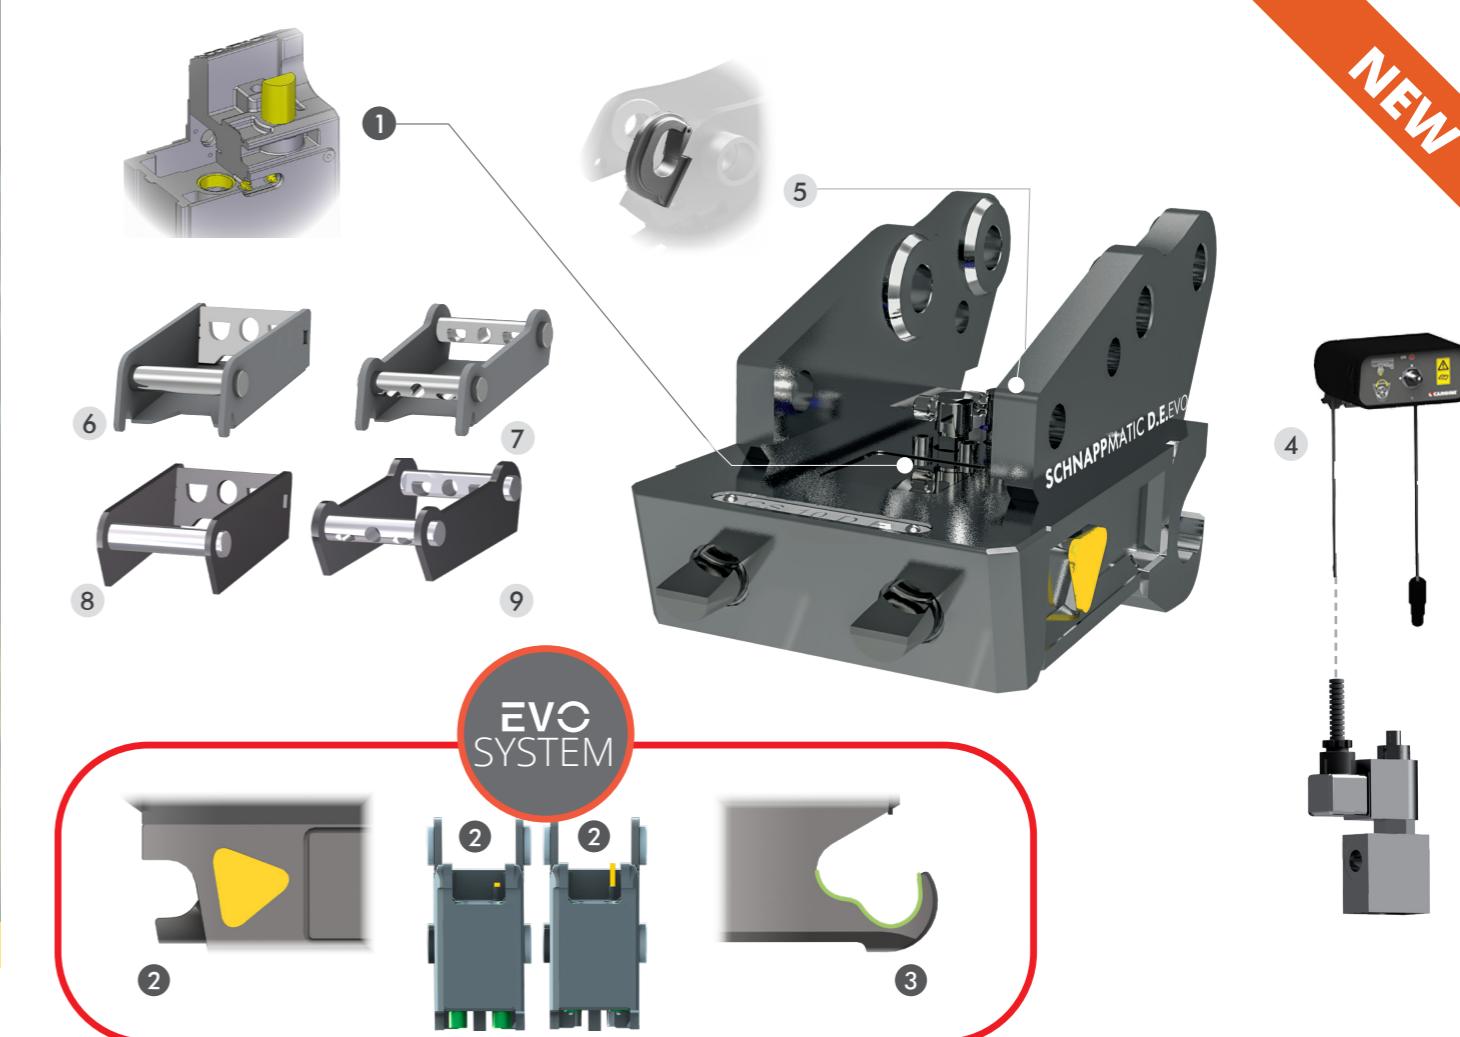

STANDARD TECHNICAL FEATURES

1 SIMPLIFIED MAINTENANCE

THANKS TO A CANALISED GREASING SYSTEM, IT SIMPLIFIES MAINTENANCE OPERATIONS, ENSURING AN EVEN DISTRIBUTION OF LUBRICANT OVER ALL MOVING PARTS. IT REDUCES WEAR, IMPROVES OPERATING PERFORMANCE AND LIMITS WASTE.

2 DOCKING SECURITY

THIS INNOVATIVE DISPLAY SYSTEM ALLOWS THE OPERATOR TO ENSURE THAT THE EQUIPMENT IS CORRECTLY ATTACHED TO THE QUICK COUPLER, IMPROVING SAFETY AND REDUCING THE RISK OF ERRORS. ALL QUICKLY AND CONVENIENTLY, DIRECTLY FROM THE CAB.

3 COMPATIBILITY WITH UNI EN 474-1:2022 STANDARD

CS SCHNAPPOMATIC D.E. EVO IS EQUIPPED WITH AN ANTI-FALL SYSTEM FOR THE TOOL, IN COMPLIANCE WITH THE REQUIREMENTS OF UNI EN 474-1:2022, WHICH ESTABLISHES THE SAFETY MEASURES NECESSARY TO AVOID THE RISK OF FALLING DURING OPERATIONS.

OPTIONAL

4 HYDRAULIC INSTALLATION KIT

WITH THE HYDRAULIC QUICK COUPLER, IT IS POSSIBLE TO SUPPLY THE INSTALLATION KIT TO THE MACHINE, INCLUDING SOLENOID VALVE AND 12V ELECTRIC SELECTOR SWITCH TO BE INSTALLED INSIDE THE DRIVING AREA.

5 LIFTING HOOK


UPON REQUEST, A LOADING HOOK WILL BE FITTED, COVERED WITH AN APPROVAL ON THE CONFORMITY DECLARATION OF OUR PRODUCT.
NB* THE LIFTING CAPACITY OF THE HOOK IS ADJUSTED ACCORDING TO THE SUPPORT TO WHICH THE HOOK IS APPLIED. THIS CAPACITY IS INDICATED IN THE PRODUCT'S OWNER'S MANUAL.

6 + 7 BUCKET ADAPTER

THE BUCKET ADAPTER IS EQUIPPED WITH AN INTEGRATED BOTTOM PLATE, IDEAL FOR USE ON BUCKETS. THE JANUS ADAPTER (7) MAKES THE BUCKET REVERSIBLE.

8 + 9 SADDLE ADAPTER

THE SADDLE ADAPTER IS SUPPLIED WITHOUT THE LOWER PLATE TO FACILITATE APPLICATIONS ON FLAT PLATES, BOLTED OR NOT. THE JANUS ADAPTER (9) MAKES THE EQUIPMENT REVERSIBLE.

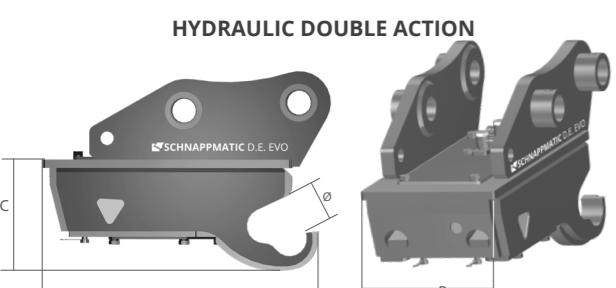

TONS (LB)	0,6 - 2,5 (1323 - 5512)	2,5 - 6,0 (5512 - 13227)	5,0 - 12,0 (11023 - 26455)
MOD.	CS10 D.E.	CS30 D.E.	CS80 D.E.
A MM (IN)	311 (12,2)	394 (15,5)	541 (21,3)
B MM (IN)	180 (7,1)	200 (8)	290 (11)
C MM (IN)	129 (5)	159 (6,2)	190 (7,5)
Ø MM (IN)	40 (1,6)	50 (2,0)	60 (2,4)
W/O COUPLER KG (LB)	18 (39,7)	30 (66)	75 (165)
MAX BAR (PSI)	250 (3626)	250 (3626)	250 (3626)