




ITS ELONGATED PROFILE AVOIDS THAT THE GROUND STICKS TO THE BUCKET'S SIDE WALLS AND SIMPLIFIES THE DISCHARGE OF LOAMY AND WET MATERIALS. IT IS EQUIPPED WITH HB400 BLADE.

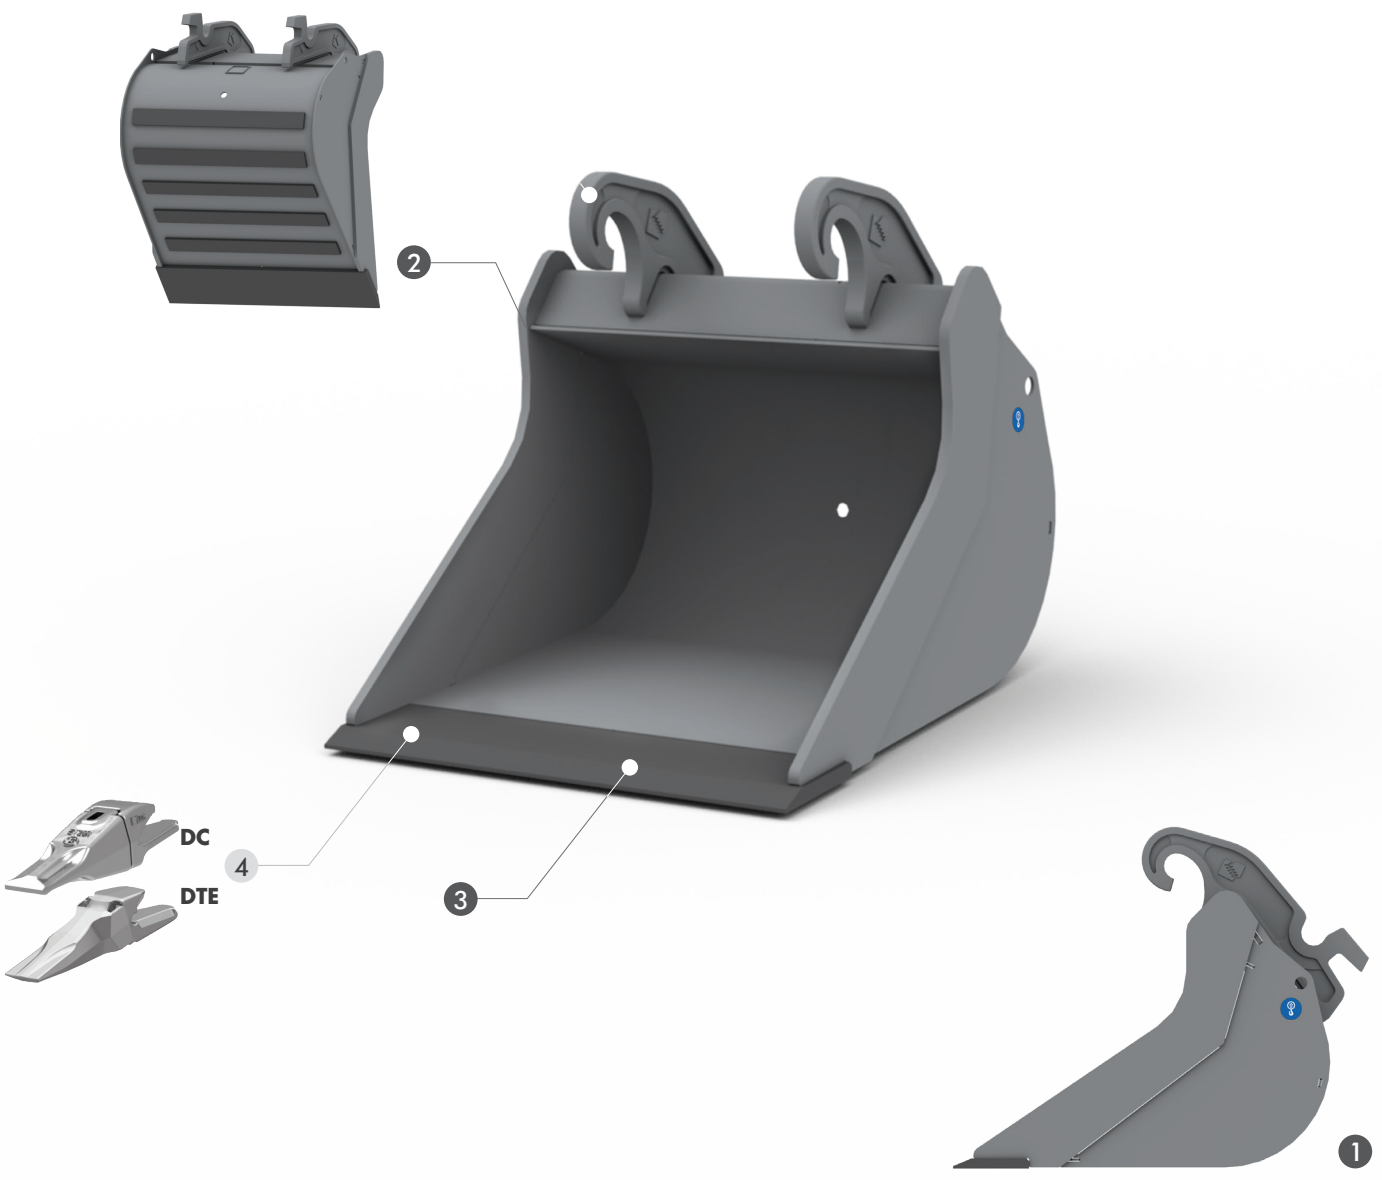

STANDARD TECHNICAL FEATURES

- 1

ELONGATED PROFILE
- 2

REINFORCING STRIPS
THE HORIZONTAL REINFORCING STRIPS ON THE BUCKET'S REAR AND BOTTOM PROTECT THE BUCKET FROM WEAR AND INCREASE ITS RESISTANCE.
- 3

HB400 BLADE

OPTIONAL


- 4

DC TEETH OR DTE TEETH

MOD.	SCN35	SCN41	SCN52	SCN60	SCN66	SCN75	SCN85
Tons (lb)	0,6 - 1,2 (1323 - 2646)	1,2 - 1,8 (2646 - 3968)	1,8 - 2,5 (3968 - 5512)	2,5 - 4,0 (5512 - 8818)	4,0 - 6,0 (8818 - 13228)	6,0 - 7,5 (13228 - 16535)	7,5 - 12,0 (16535 - 26455)

SCN35

MACHINE WEIGHT 0,6 - 1,2 t (1323 - 2646 lb)

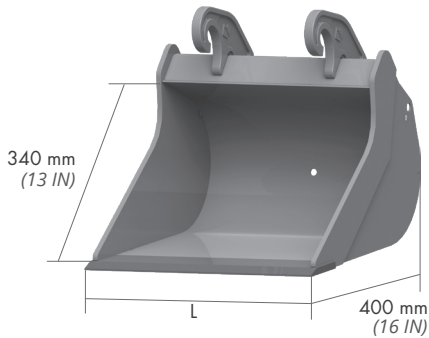


L mm (in)	WEIGHT Kg* (lb*)	CAP. SAE l (gal)	 
300 (12)	19 (42)	21 (5,5)	AF
300 (12)	19 (42)	21 (5,5)	CW
400 (16)	23 (51)	31 (8,2)	AF
400 (16)	23 (51)	31 (8,2)	CW
500 (20)	28 (62)	47 (12,4)	AF
500 (20)	28 (62)	47 (12,4)	CW

OPTIONAL

 	
DC teeth	DTE teeth

SCN41

MACHINE WEIGHT 1,2 - 1,8 t (2646 - 3968 lb)

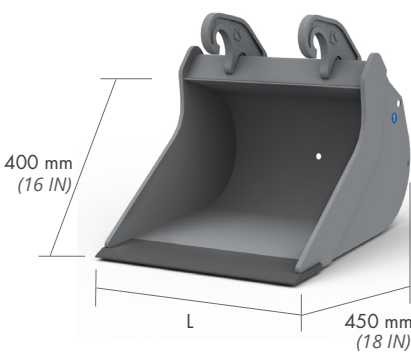



L mm (in)	WEIGHT Kg* (lb*)	CAP. SAE l (gal)	 
300 (12)	22 (48)	26 (6,9)	AF
300 (12)	22 (48)	26 (6,9)	CW
400 (16)	27 (59)	38 (10,0)	AF
400 (16)	27 (59)	38 (10,0)	CW
500 (20)	32 (70)	52 (13,7)	AF
500 (20)	32 (70)	52 (13,7)	CW
600 (24)	37 (82)	75 (19,8)	AF
600 (24)	37 (82)	75 (19,8)	CW

OPTIONAL

 	
DC teeth	DTE teeth

SCN52

MACHINE WEIGHT 1,8 - 2,5 t (3968 - 5512 lb)

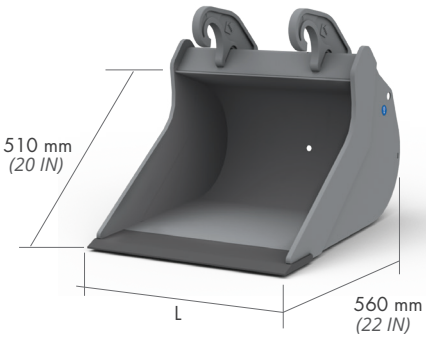


L mm (in)	WEIGHT Kg* (lb*)	CAP. SAE l (gal)	 
300 (12)	32 (71)	34 (9,0)	AF
300 (12)	32 (71)	34 (9,0)	CW
400 (16)	40 (88)	51 (13,5)	AF
400 (16)	40 (88)	51 (13,5)	CW
500 (20)	47 (104)	69 (18,2)	AF
500 (20)	47 (104)	69 (18,2)	CW
600 (24)	54 (119)	87 (23,0)	AF
600 (24)	54 (119)	87 (23,0)	CW

OPTIONAL

 	
DC teeth	DTE teeth

SCN60

MACHINE WEIGHT 2,5 - 4,0 t (5512 - 8818 lb)

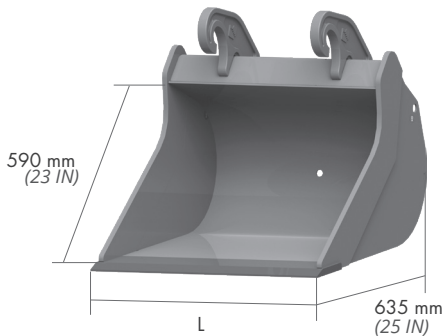

L mm (in)	WEIGHT Kg* (lb*)	CAP. SAE l (gal)	 
300 (12)	41 (90)	121 (12,2)	AF
300 (12)	41 (90)	121 (12,2)	CW
400 (16)	49 (108)	69 (18,2)	AF
400 (16)	49 (108)	69 (18,2)	CW
500 (20)	57 (126)	93 (24,6)	AF
500 (20)	57 (126)	93 (24,6)	CW
600 (24)	65 (143)	118 (31,2)	AF
600 (24)	65 (143)	118 (31,2)	CW

OPTIONAL


 	
DC teeth	DTE teeth

* weight of the tank excluding attachment

* weight of the tank excluding attachment


SCN66

MACHINE WEIGHT 4,0 - 6,0 t (8818 - 13228 lb)

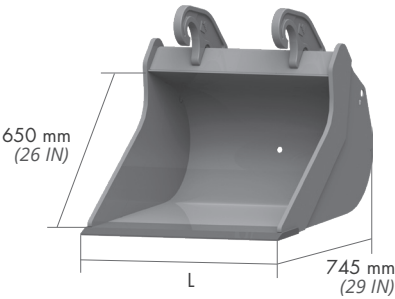


L mm (in)	WEIGHT Kg* (lb*)	CAP. SAE l (gal)	 
400 (16)	65 (143)	79 (20,9)	AF
400 (16)	65 (143)	79 (20,9)	CW
500 (20)	75 (165)	107 (28,3)	AF
500 (20)	75 (165)	107 (28,3)	CW
600 (24)	86 (190)	137 (36,2)	AF
600 (24)	86 (190)	137 (36,2)	CW
700 (28)	97 (214)	168 (44,4)	AF
700 (28)	97 (214)	168 (44,4)	CW

OPTIONAL




SCN75

MACHINE WEIGHT 6,0 - 7,5 t (13228 - 16535 lb)

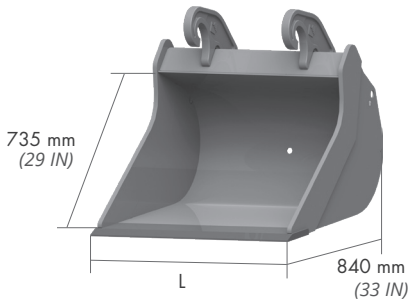


L mm (in)	WEIGHT Kg* (lb*)	CAP. SAE l (gal)	 
400 (16)	85 (187)	94 (24,8)	AF
400 (16)	85 (187)	94 (24,8)	CW
500 (20)	100 (220)	128 (33,8)	AF
500 (20)	100 (220)	128 (33,8)	CW
600 (24)	114 (251)	165 (43,6)	AF
600 (24)	114 (251)	165 (43,6)	CW
700 (28)	128 (282)	203 (53,6)	AF
700 (28)	128 (282)	203 (53,6)	CW
800 (31)	142 (313)	243 (64,2)	AF
800 (31)	142 (313)	243 (64,2)	CW

OPTIONAL




SCN85

MACHINE WEIGHT 7,5 - 12,0 t (16535 - 26455 lb)

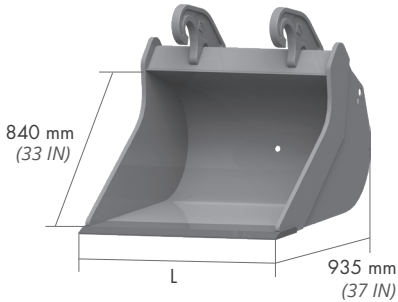

L mm (in)	WEIGHT Kg* (lb*)	CAP. SAE l (gal)	 
400 (16)	98 (216)	121 (32,0)	AF
400 (16)	98 (216)	121 (32,0)	CW
500 (20)	112 (247)	160 (42,3)	AF
500 (20)	112 (247)	160 (42,3)	CW
600 (24)	127 (280)	205 (54,2)	AF
600 (24)	127 (280)	205 (54,2)	CW
700 (28)	142 (313)	252 (66,6)	AF
700 (28)	142 (313)	252 (66,6)	CW
800 (31)	157 (346)	301 (79,5)	AF
800 (31)	157 (346)	301 (79,5)	CW
900 (35)	172 (379)	352 (93,0)	AF
900 (35)	172 (379)	352 (93,0)	CW

OPTIONAL



* weight of the tank excluding attachment

* weight of the tank excluding attachment