


ADAPTERS

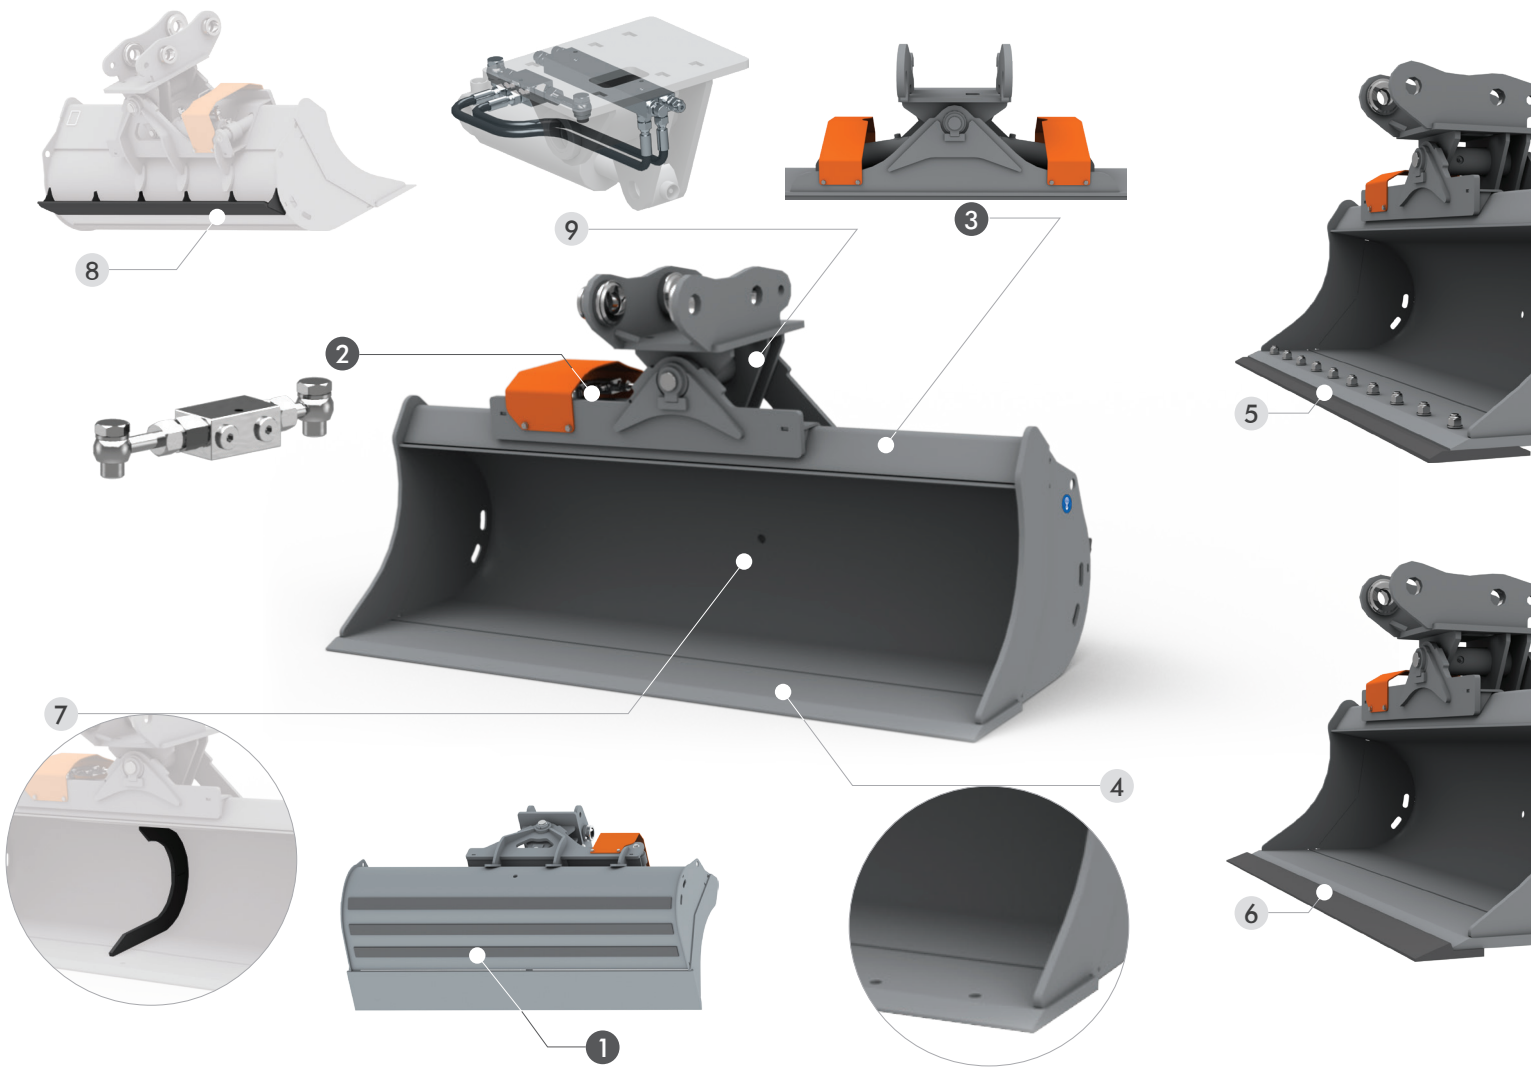

STANDARD TECHNICAL FEATURES

- 1 REINFORCING STRIPS**
THE HORIZONTAL REINFORCING STRIPS ON THE BUCKET'S REAR AND BOTTOM PROTECT THE BUCKET FROM WEAR AND INCREASE ITS RESISTANCE.
- 2 BLOCK VALVE**
IT ALLOWS TO KEEP THE BUCKET POSITIONING DURING THE WORKING PHASE.
- 3 DOUBLE CYLINDER FOR SQ65 GD, SQ70 GD**

OPTIONAL

- 4 PERFORATED BLADE**
- 5 HB400 ADDITIONAL BOLT-ON REVERSIBLE CUTTING EDGE**
BOLTED-IN HB400 REVERSIBLE UNDERBLADE. RECOMMENDED TO WORK ON PARTICULARLY ABRASIVE SOILS.
- 6 HB500 WELDED ADDITIONAL CUTTING EDGE**
- 7 BEZEL**
IT ENSURES A HIGHER STRUCTURAL RESISTANCE. **HIGHLY RECOMMENDED WITH BUCKETS 1400MM (55) WIDE OR MORE.**
- 8 REAR RAZOR**
WHEN THE MACHINE'S ARM IS KEPT CLOSED, IT ALLOWS TO FINISH SURFACES EVENLY.
- 9 PIPE KIT**
OPTIONAL KIT INSTALLED ON THE BUCKET FOR THE FEEDING OF THE HYDRAULIC CYLINDER. IT ALLOWS THE USE OF TWO OUTLETS ON THE RIGHT AND TWO OUTLETS ON THE LEFT FOR THE HYDRAULIC CONNECTION TO THE MACHINE REDUCING THE INSTALLATION TIMES.
THE CONNECTING PIPES ARE NOT SUPPLIED.



PARTICULARLY SUITABLE FOR FINISHING AND LEVELLING WORKS. ITS TILTING MECHANISM ENABLES TO TILT THE BUCKET BY 45° ON BOTH SIDES. THE STANDARD BLOCK VALVE ENABLES TO KEEP THE ANGLE.

THE INSTALLATION OF BEZELS IS HIGHLY RECOMMENDED FOR BUCKETS WIDER THAN 1400 MM, IN ORDER TO AVOID DAMAGES TO THE BUCKET IN CASE OF HEAVY DUTY JOBS OR WITH PARTICULARLY HARD TERRAINS:

- **WIDTH FROM 1400 TO 1500 MM: NR. 1 BEZEL**
- **WIDTH FROM 1600 TO 1600 MM: NR. 2 BEZELS**
- **WIDTH FROM 1800 TO 2200 MM: NR. 3 BEZELS**

MOD.	SQ30	SQ35	SQ40	SQ45	SQ50	SQ55	MIDI	EXCAVATOR	SQ70 GD
							SQ60	SQ65 GD	
TONS (LB)	1,0 - 1,8 (2204 - 3968)	1,8 - 2,5 (3968 - 5512)	2,5 - 4,0 (5512 - 8818)	4,0 - 5,0 (8818 - 11023)	5,0 - 7,5 (11023 - 16535)	7,5 - 10,0 (16535 - 22046)	10,0 - 12,0 (22046 - 26455)	12,0 - 18,0 (26456 - 39683)	18,0 - 22,0 (39683 - 48502)

SQ30 MACHINE WEIGHT 1,0 - 1,8 t (2204 - 3968 lb)

ADAPTERS

AR15

KG 7 (LB 15)

CS10

KG 10 (LB 22)

CS10 JANUS

KG 10 (LB 22)

CR15

KG 10 (LB 22)

M'LOCK30


KG 10 (LB 22)

CW00

KG 5 (LB 11)

CW05

KG 9 (LB 19)

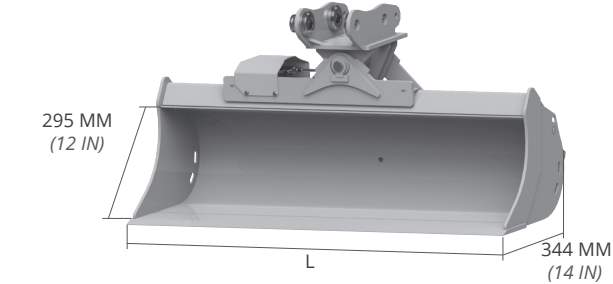

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
800 (31)	69 (153)	58 (15,3)	AF - AR - CS
			CR - CM
			CW - CS JANUS
1000 (39)	78 (173)	74 (19,5)	AF - AR - CS
			CR - CM
			CW - CS JANUS

OPTIONAL

REAR RAZOR	8	PIPE KIT	9
------------	---	----------	---

SQ35 MACHINE WEIGHT - 1,8 - 2,5 t (3968 - 5512 lb)

ADAPTERS

AR15

KG 7 (LB 15)

AR30

KG 10 (LB 22)

CS10

KG 10 (LB 22)

CS30

KG 18 (LB 39)

CS10 JANUS

KG 10 (LB 22)

CS30 JANUS

KG 19 (LB 41)

CR15

KG 10 (LB 22)

CR30

KG 13 (LB 28)


M'LOCK30

KG 10 (LB 22)

CW05

KG 12 (LB 26)

KG 9 (LB 19)

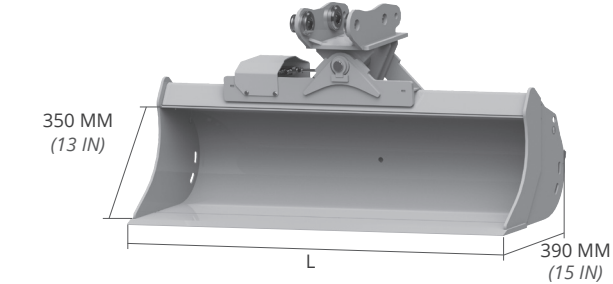

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
800 (31)	76 (169)	75 (19,8)	AF - AR - CS
			CR - CM
			CW - CS JANUS
1000 (39)	85 (188)	96 (25,4)	AF - AR - CS
			CR - CM
			CW - CS JANUS
1200 (47)	94 (208)	117 (30,9)	AF - AR - CS
			CR - CM
			CW - CS JANUS

OPTIONAL

PERFORATED BLADE	4	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	5	HB500 WELDED ADDITIONAL CUTTING EDGE	6	REAR RAZOR	8	PIPE KIT	9
------------------	---	---	---	--------------------------------------	---	------------	---	----------	---

SQ40 MACHINE WEIGHT 2,5 - 4,0 t (5512 - 8818 lb)

ADAPTERS

AR40

KG 11 (LB 24)

CS30

KG 18 (LB 39)

CS30 JANUS

KG 19 (LB 41)

CR40


KG 14 (LB 30)

M'LOCK30

KG 12 (LB 26)

CW05

KG 9 (LB 19)

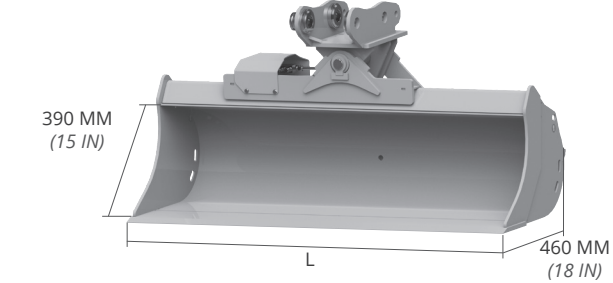

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1000 (39)	130 (286)	125 (33,0)	AF - AR - CS
			CR - CM
			CW - CS JANUS
1200 (47)	143 (315)	154 (40,7)	AF - AR - CS
			CR - CM
			CW - CS JANUS
1400 (55)	156 (343)	182 (48,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS

OPTIONAL

PERFORATED BLADE	4	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	5	HB500 WELDED ADDITIONAL CUTTING EDGE	6	BEZEL	7	REAR RAZOR	8	PIPE KIT	9
------------------	---	---	---	--------------------------------------	---	-------	---	------------	---	----------	---

SQ45 MACHINE WEIGHT 4,0 - 5,0 t (8818 - 11023 lb)

ADAPTERS

AR50

KG 17 (LB 37)

CS30

KG 18 (LB 39)

CS30 JANUS

KG 19 (LB 41)

CR50


KG 22 (LB 48)

M'LOCK100

KG 35 (LB 77)

CW10

KG 23 (LB 50)

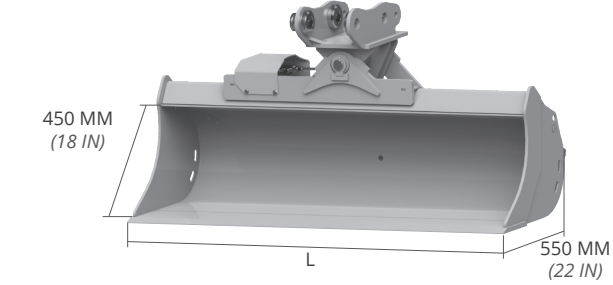

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	196 (433)	213 (56,3)	AF - AR - CS
			CR - CM
			CW - CS JANUS
1400 (55)	213 (470)	254 (67,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS
1500 (59)	221 (488)	274 (72,4)	AF - AR - CS
			CR - CM
			CW - CS JANUS

OPTIONAL

PERFORATED BLADE	4	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	5	HB500 WELDED ADDITIONAL CUTTING EDGE	6	BEZEL	7	REAR RAZOR	8	PIPE KIT	9
------------------	---	---	---	--------------------------------------	---	-------	---	------------	---	----------	---

* weight of the tank excluding attachment

* weight of the tank excluding attachment

SQ50 MACHINE WEIGHT 5,0 - 7,5 t (11012 - 16535 lb)

ADAPTERS

AR50
KG 17 (LB 37)

AR70
KG 24 (LB 52)

CS80
KG 44 (LB 97)


CS80JANUS
KG 46 (LB 101)

CR50
KG 22 (LB 48)

CR70
KG 34 (LB 75)

M'LOCK100
KG 35 (LB 77)

CW10
KG 23 (LB 50)

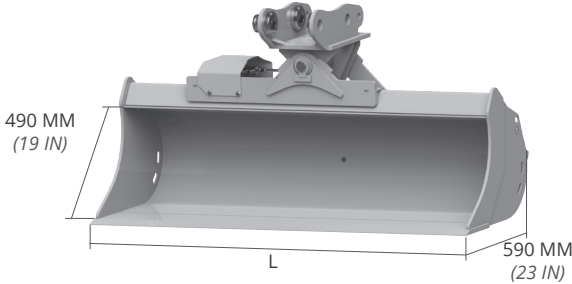

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	219 (483)	250 (66,0)	AF - AR - CS
			CR - CM
			CW - CS JANUS
1400 (55)	239 (527)	298 (78,8)	AF - AR - CS
			CR - CM
			CW - CS JANUS
1600 (63)	259 (571)	345 (91,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS
1800 (71)	279 (616)	392 (103,6)	AF - AR - CS
			CR - CM
			CW - CS JANUS

OPTIONAL

4

5

6

7

8

9

PERFORATED
BLADE

HB400
ADDITIONAL
EDGE
MOUNTED ON
THE BUCKET

HB500WELDED
ADDITIONAL
CUTTINGEDGE

BEZEL

REAR RAZOR

PIPE KIT

SQ55 MACHINE WEIGHT 7,5 - 10,0 t (16535 - 22046 lb)

ADAPTERS


CS80
KG 44 (LB 97)

CS80 JANUS
KG 46 (LB 101)

CR70
KG 34 (LB 75)

M'LOCK100
KG 35 (LB 77)

CW10
KG 25 (LB 55)

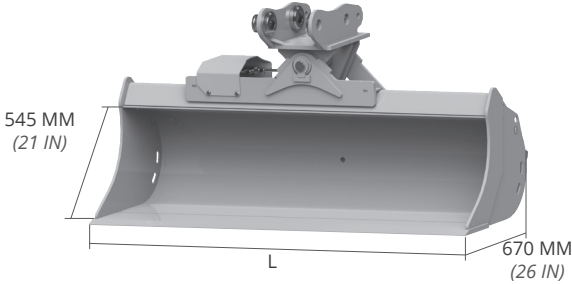

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	296 (653)	326 (86,1)	AF - CS
			CR - CM
			CW - CS JANUS
1400 (55)	322 (710)	387 (102,2)	AF - CS
			CR - CM
			CW - CS JANUS
1600 (63)	349 (770)	447 (118,1)	AF - CS
			CR - CM
			CW - CS JANUS
1800 (71)	376 (829)	507 (133,9)	AF - CS
			CR - CM
			CW - CS JANUS

OPTIONAL

4

5

6

7

8

9

PERFORATED
BLADE

HB400
ADDITIONAL
EDGE
MOUNTED ON
THE BUCKET

HB500WELDED
ADDITIONAL
CUTTINGEDGE

BEZEL

REAR RAZOR

PIPE KIT

SQ60 MIDI MACHINE WEIGHT 10,0 - 12,0 t (22046 - 26455 lb)

ADAPTERS


CS80
KG 44 (LB 97)

CS80 JANUS
KG 46 (LB 101)

CR70
KG 34 (LB 75)

M'LOCK100
KG 66 (LB 145)

CW20
KG 57 (LB 106)

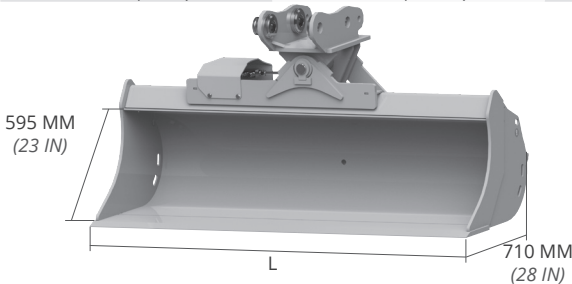

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	331 (730)	367 (97,0)	AF - CS
			CR - CM - CS JANUS
			CW
1400 (55)	361 (796)	436 (115,2)	AF - CS
			CR - CM - CS JANUS
			CW
1600 (63)	393 (867)	504 (133,1)	AF - CS
			CR - CM - CS JANUS
			CW
1800 (71)	423 (933)	573 (151,4)	AF - CS
			CR - CM - CS JANUS
			CW
2000 (79)	453 (999)	641 (169,3)	AF - CS
			CR - CM - CS JANUS
			CW

OPTIONAL

4

5

6

7

8

9

PERFORATED
BLADE

HB400
ADDITIONAL
EDGE
MOUNTED ON
THE BUCKET

HB500WELDED
ADDITIONAL
CUTTINGEDGE

BEZEL

REAR RAZOR

PIPE KIT

SQ65 GD EXCAVATOR MACHINE WEIGHT 12,0 - 18,0 t (26456 - 39683 lb)


ADAPTERS

CS100
KG 45 (LB 99)

CS100 JANUS
KG 93 (LB 205)

M'LOCK100
KG 66 (LB 145)

CW20
KG 48 (LB 106)

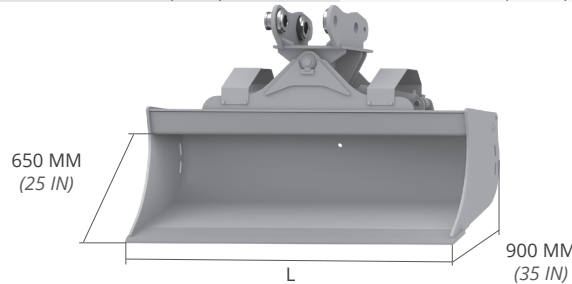

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1400 (55)	456 (1005)	631 (166,7)	AF - CM
			CS - CW
			CS JANUS
1500 (59)	477 (1052)	665 (175,7)	AF - CM
			CS - CW
			CS JANUS
1600 (63)	497 (1096)	699 (184,7)	AF - CM
			CS - CW
			CS JANUS
1800 (71)	538 (1186)	767 (202,6)	AF - CM
			CS - CW
			CS JANUS
2000 (79)	578 (1274)	835 (220,6)	AF - CM
			CS - CW
			CS JANUS

OPTIONAL

4

5

6

7

8

9

PERFORATED
BLADE

HB400
ADDITIONAL
EDGE
MOUNTED ON
THE BUCKET

HB500WELDED
ADDITIONAL
CUTTINGEDGE

BEZEL

REAR RAZOR

PIPE KIT

* weight of the tank excluding attachment

* weight of the tank excluding attachment

SQ70 GD MACHINE WEIGHT 18,0 - 22,0 t (39683 - 48502 lb)

ADAPTERS

CS100



KG 45 (LB 99)

CS100 JANUS



KG 93 (LB 205)

M'LOCK100




KG 66 (LB 145)

CW30



KG 57 (LB 126)

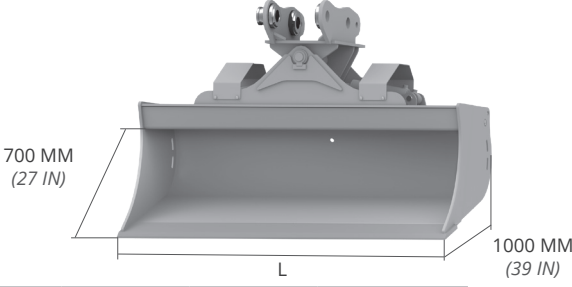

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1500 (59)	555 (1224)	780 (206,1)	AF - CM
			CS - CW
			CS JANUS
1600 (63)	580 (1279)	820 (216,6)	AF - CM
			CS - CW
			CS JANUS
1800 (71)	630 (1389)	900 (237,8)	AF - CM
			CS - CW
			CS JANUS
2000 (79)	678 (1495)	980 (258,9)	AF - CM
			CS - CW
			CS JANUS
2200 (87)	724 (1596)	1060 (280,0)	AF - CM
			CS - CW
			CS JANUS

OPTIONAL

- 4
- PERFORATED
BLADE
- 5
- HB400
ADDITIONAL
EDGE
MOUNTED ON
THE BUCKET
- 6
- HB500 WELDED
ADDITIONAL
CUTTING EDGE
- 7
- BEZEL
- 8
- REAR RAZOR
- 9
- PIPE KIT



* weight of the tank excluding attachment