




AF



AR



CS



CR



CS JANUS



M'LOCK




CW

ADAPTERS



SA FORME À TRAPÈZE ET LA POSSIBILITÉ D'INCLINER LES FLANCS DE 52°-60° PERMETTENT LA RÉALISATION ET L'ENTRETIEN DES FOSSÉS ET DES CANAUX DE DIMENSIONS ET ANGLES DIVERS.

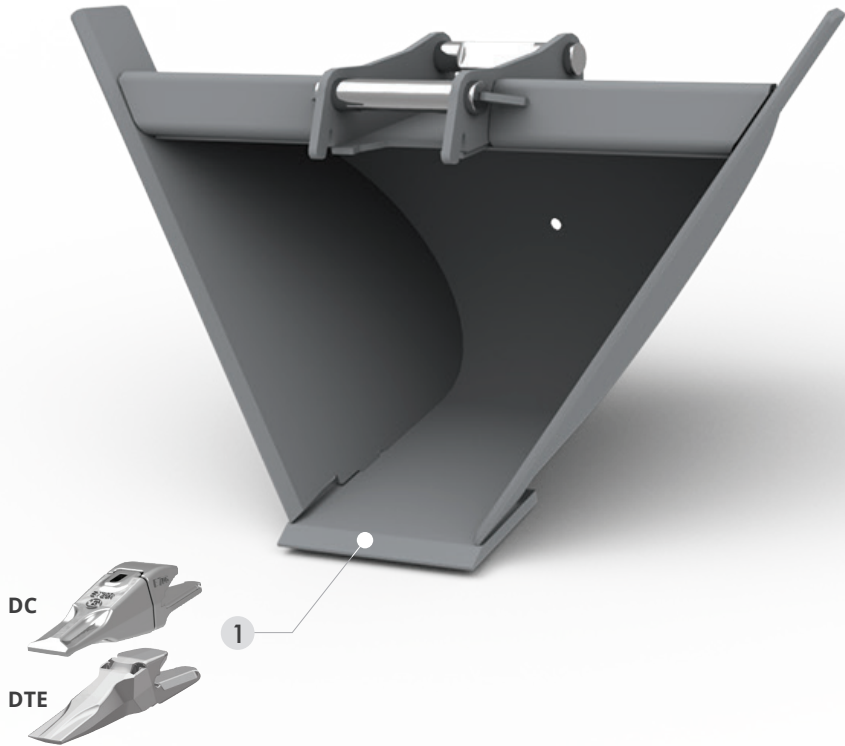

EN OPTION

- 1
- DENTS DC
- DENTS DTE

| MOD. | T38       | T45       | T53       | T62       | T67       | T73        | T80         | MIDI        | EXCAVATOR   |             |             |  |
|------|-----------|-----------|-----------|-----------|-----------|------------|-------------|-------------|-------------|-------------|-------------|--|
|      |           |           |           |           |           |            |             | T85 GD      | T92 GD      | T100 GD     | T110 GD     |  |
| TONS | 0,6 - 1,8 | 1,8 - 2,5 | 2,5 - 4,0 | 4,0 - 5,0 | 5,0 - 7,5 | 7,5 - 10,0 | 10,0 - 12,0 | 12,0 - 14,0 | 12,0 - 14,0 | 14,0 - 18,0 | 18,0 - 22,0 |  |



T38

POIDS MACHINE 0,6 - 1,8

ADAPTERS

AR15

KG 7

CS10

KG 10

CS10 JANUS

KG 10

CR15

KG 10

M'LOCK30


KG 10

CW00

KG 5

CW05

KG 9

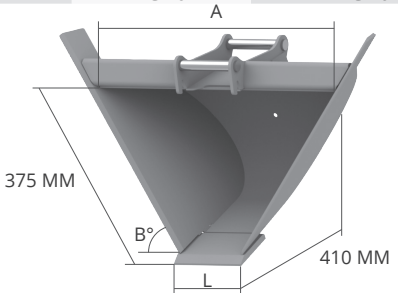

EN OPTION

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS      |
|---------|---------|-----|--------------|---------------|---------------|
| 200     | 607     | 52° | 27           | 47            | AF - AR - CS  |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |
| 200     | 490     | 60° | 24           | 37            | AF - AR - CS  |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |

1 DC 1  
KG 1,4

1 DTE 13  
KG 1,7

T45

POIDS MACHINE 1,8 - 2,5

ADAPTERS

AR30

KG 10

CS10

KG 10

CS30

KG 18

CS10 JANUS

KG 10

CS30 JANUS PRO

KG 19

CR30


KG 13

M'LOCK30

KG 12

CW05

KG 9

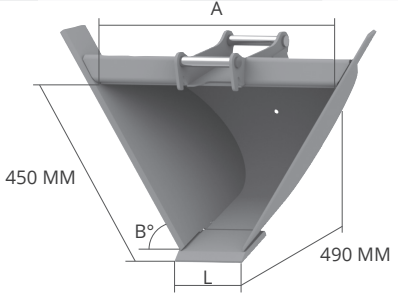

EN OPTION

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS      |
|---------|---------|-----|--------------|---------------|---------------|
| 250     | 741     | 52° | 45           | 77            | AF - AR - CS  |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |
| 250     | 600     | 60° | 40           | 63            | AF - AR - CS  |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |

1 DC 1  
KG 1,4

1 DTE 13  
KG 1,7

T53

POIDS MACHINE 2,5 - 4,0

ADAPTERS

AR40

KG 11

CS30

KG 18

CS30 JANUS

KG 19

CR40


KG 14

M'LOCK30

KG 12

CW05

KG 9

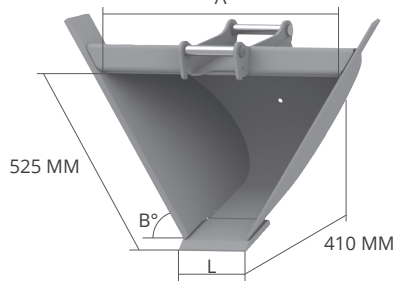

EN OPTION

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS      |
|---------|---------|-----|--------------|---------------|---------------|
| 300     | 868     | 52° | 69           | 140           | AF - AR - CS  |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |
| 300     | 705     | 60° | 61           | 114           | AF - AR - CS  |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |

1 DC 3  
KG 2,1

1 DTE 17  
KG 3,0

T62

POIDS MACHINE 4,0 - 5,0

ADAPTERS

AR50

KG 17

CS30

KG 18

CS30 JANUS

KG 19

CR50


KG 22

M'LOCK100

KG 35

CW10

KG 23

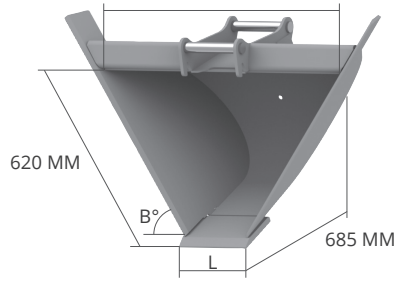

EN OPTION

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS      |
|---------|---------|-----|--------------|---------------|---------------|
| 300     | 985     | 52° | 101          | 190           | AF - AR - CS  |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |
| 300     | 790     | 60° | 88           | 153           | AF - AR - CS  |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |

1 DC 6  
KG 4,0

1 DTE 17  
KG 3,0

\* poids cuve sans attache

\* poids cuve sans attache

T67

POIDS MACHINE 5,0 - 7,5

ADAPTERS

AR50  
KG 17

AR70  
KG 24

CS80  
KG 44


CS80 JANUS  
KG 46

CR50  
KG 22

CR70  
KG 34

M'LOCK100  
KG 35

CW10  
KG 23

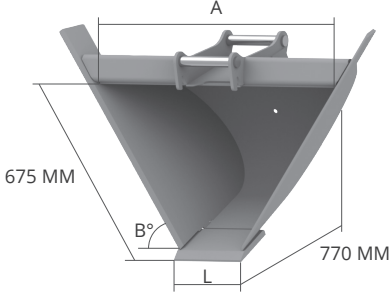

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS      |
|---------|---------|-----|--------------|---------------|---------------|
| 350     | 1087    | 52° | 144          | 239           | AF - AR - CS  |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |
| 350     | 876     | 60° | 126          | 191           | AF - AR - CS  |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |

EN OPTION

1 DC 8  
KG 5,4

1 DTE 17  
KG 3,0

T73

POIDS MACHINE 7,5 - 10,0

ADAPTERS


CS80  
KG 44

CS80 JANUS  
KG 46

CR70  
KG 34

M'LOCK100  
KG 35

CW10  
KG 23

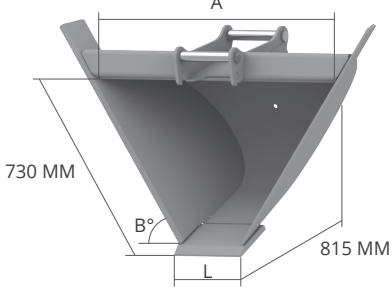

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS      |
|---------|---------|-----|--------------|---------------|---------------|
| 350     | 1157    | 52° | 166          | 318           | AF - CS       |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |
| 350     | 928     | 60° | 146          | 254           | AF - CS       |
|         |         |     |              |               | CR - CM       |
|         |         |     |              |               | CW - CS JANUS |

EN OPTION

1 DC 8  
KG 5,4

1 DTE 19  
KG 5,6

T80

POIDS MACHINE 10,0 - 12,0

ADAPTERS


CS80  
KG 44

CS80 JANUS  
KG 46

CR70  
KG 34

M'LOCK100  
KG 66

CW20  
KG 57

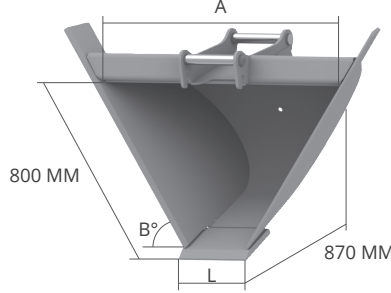

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS           |
|---------|---------|-----|--------------|---------------|--------------------|
| 350     | 1236    | 52° | 207          | 355           | AF - CS            |
|         |         |     |              |               | CR - CM - CS JANUS |
|         |         |     |              |               | CW                 |
| 350     | 985     | 60° | 184          | 281           | AF - CS            |
|         |         |     |              |               | CR - CM - CS JANUS |
|         |         |     |              |               | CW                 |

EN OPTION

1 DC 11  
KG 7,7

1 DTE 19  
KG 5,6

T85 GD MIDI

POIDS MACHINE 12,0 - 14,0


ADAPTERS

CS100  
KG 45

CS100 JANUS  
KG 93

M'LOCK100  
KG 66

CW20  
KG 57

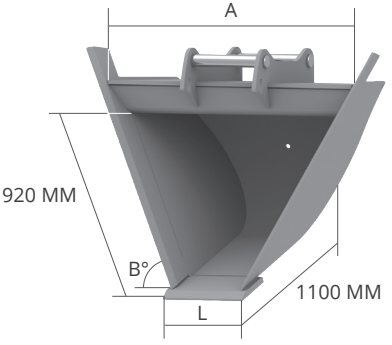

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS |
|---------|---------|-----|--------------|---------------|----------|
| 350     | 1420    | 52° | 320          | 430           | AF - CM  |
|         |         |     |              |               | CS - CW  |
|         |         |     |              |               | CS JANUS |
| 350     | 1120    | 60° | 275          | 370           | AF - CM  |
|         |         |     |              |               | CS - CW  |
|         |         |     |              |               | CS JANUS |

EN OPTION

1 DC 11  
KG 7,7

1 DTE 19  
KG 5,6

\* poids cuve sans attache

\* poids cuve sans attache

T92 GD EXCAVATOR

POIDS MACHINE 12,0 - 14,0

ADAPTERS


CS100  
KG 45

A

CS100 JANUS  
KG 93

M'LOCK100  
KG 66

CW20  
KG 57

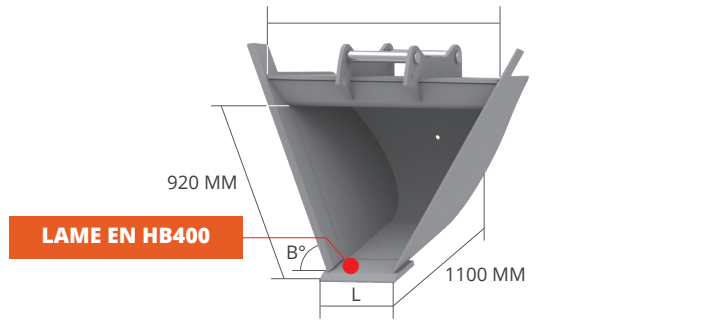

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS |
|---------|---------|-----|--------------|---------------|----------|
| 400     | 1550    | 52° | 400          | 540           | AF - CM  |
|         |         |     |              |               | CS - CW  |
|         |         |     |              |               | CS JANUS |
| 400     | 1230    | 60° | 340          | 470           | AF - CM  |
|         |         |     |              |               | CS - CW  |
|         |         |     |              |               | CS JANUS |

EN OPTION

1 DC 13  
KG 13

1 DTE 23  
KG 8,8

T100 GD

POIDS MACHINE 14,0 - 18,0

ADAPTERS


CS100  
KG 45

A

CS100 JANUS  
KG 93

M'LOCK100  
KG 66

CW30  
KG 66

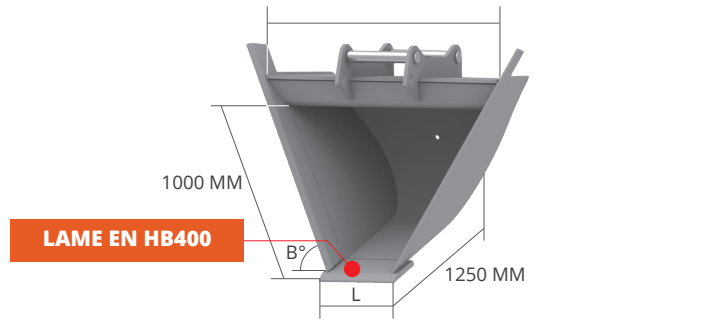

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS |
|---------|---------|-----|--------------|---------------|----------|
| 400     | 1680    | 52° | 530          | 680           | AF - CM  |
|         |         |     |              |               | CS - CW  |
|         |         |     |              |               | CS JANUS |
| 400     | 1320    | 60° | 455          | 585           | AF - CM  |
|         |         |     |              |               | CS - CW  |
|         |         |     |              |               | CS JANUS |

EN OPTION

1 DC 15  
KG 16,1

1 DTE 29  
KG 12,5

T110 GD

POIDS MACHINE 18,0 - 22,0

ADAPTERS


CS100  
KG 45

A

CS100 JANUS  
KG 93

M'LOCK100  
KG 66

CW30  
KG 66

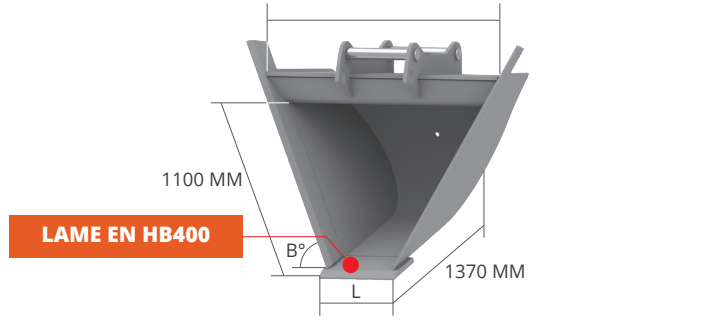

| L<br>MM | A<br>MM | B°  | POIDS<br>KG* | CAP. SAE<br>L | ADAPTERS |
|---------|---------|-----|--------------|---------------|----------|
| 400     | 1820    | 52° | 660          | 870           | AF - CM  |
|         |         |     |              |               | CS - CW  |
|         |         |     |              |               | CS JANUS |
| 400     | 1100    | 60° | 565          | 740           | AF - CM  |
|         |         |     |              |               | CS - CW  |
|         |         |     |              |               | CS JANUS |

EN OPTION

1 DC 15  
KG 16,1

1 DTE 33  
KG 18,1

\* poids cuve sans attache

\* poids cuve sans attache