



THE DEMOLITION ROTATING PULVERISERS GATOR HAS BEEN DESIGNED FOR PRIMARY AND SECONDARY DEMOLITION INCLUDING THE CRUSHING OF PREVIOUSLY DEMOLISHED MATERIAL ON THE GROUND IN ORDER TO REDUCE IT FOR THE DISPOSAL PROCESS AND RECYCLING. SUITABLE FOR CUTTING AND CRUSHING HEAVY MATERIAL SUCH AS CONCRETE WITH METAL REINFORCEMENT AND STEEL STRUCTURES. IT IS HIGHLY RESISTANT THANKS TO ITS STRUCTURE DESIGNED TO INCREASE ITS CRUSHING FORCE. ITS EASY MAINTENANCE IS MADE POSSIBLE BY THE EASY REPLACEMENT OF ALL PARTS MOST SUBJECT TO WEAR, WHILE THE DESIGN IS DEVELOPED FOR A BETTER CRUSHING RESULT.

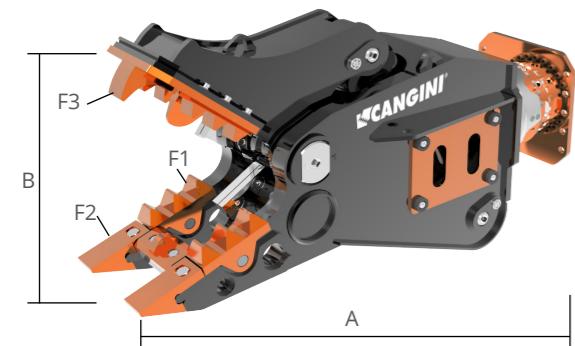

 WEIGHT	TON (LB)	3,0 - 8,0 T (6613-22046)	6,0 - 13,0 (13227-28660)	9,0 - 17,0 T (19842-37478)
 EXCAVATOR OIL FLOW	MOD.	<b>GATOR03</b>	<b>GATOR06</b>	<b>GATOR10</b>
 EXCAVATOR WORKING PRESSURE	A MM (IN)	1280 (50)	1450 (57)	1620 (64)
 ROTATION	B MM (IN)	415 (16)	520 (21)	605 (24)
 ROTATIONAL OIL FLOW	F1 TON (LB)	110 (242508)	130 (286601)	150 (330693)
 ROTATION WORKING PRESSURE	F2 TON (LB)	60 (132277)	65 (143300)	70 (154324)
	F3 TON (LB)	35 (77162)	40 (88185)	45 (99208)
	KG (LB)	330 (728)	570 (1257)	1000 (2204)
	L/MIN (GAL/MIN)	30-70 (7,9-18,5)	60-100 (15,8-26,4)	70-110 (18,5-29)
	BAR (PSI)	280 (4061)	320 (4641)	320 (4641)
		360°	360°	360°
	L/MIN (GAL/MIN)	10-25 (2,6-6,6)	20-40 (5,3-10,6)	20-40 (5,3-10,6)
	BAR (PSI)	100 (1450)	100 (1450)	100 (1450)
	MM (IN)	120 (47)	120 (4,7)	160 (6,3)
 MAX	MM (IN)	28 (1,1)	30 (1,1)	30 (1,2)

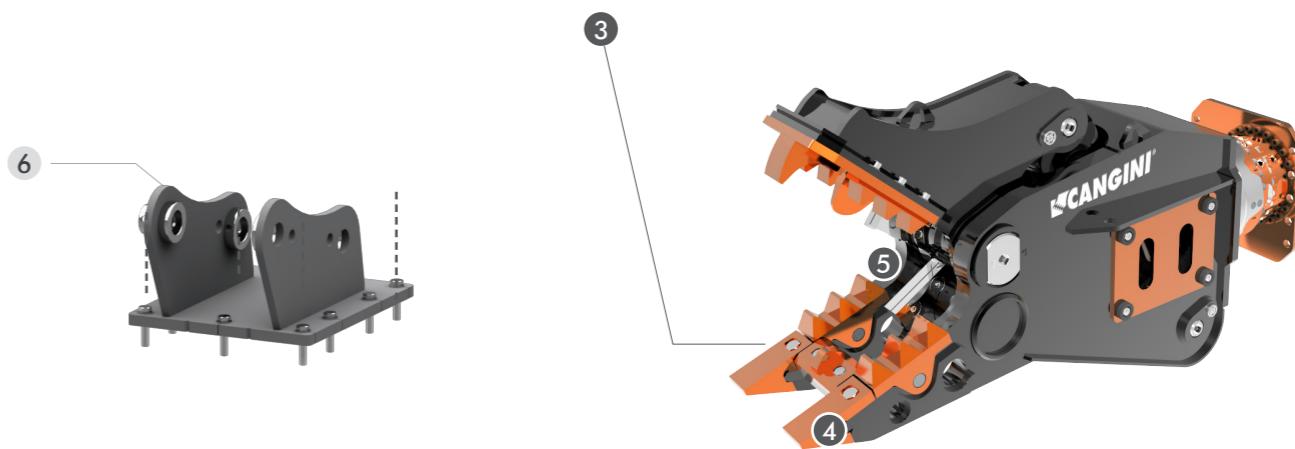

## STANDARD TECHNICAL SPECIFICATIONS

- 1 DOUBLE MOTORS ENSURING HIGH ROTATION AND HIGH POWER**
- 2 PRESSURE RELIEF VALVE**  
PRESERVES THE ROTATION MOTOR FROM HIGH PRESSURE PEAKS
- 3 HIGH CUTTING PENETRATION POWER**
- 4 JAWS AND BLADES EASY TO REPLACE AND MAINTAIN**
- 5 CYLINDERS AND HYDRAULIC SYSTEM FULLY PROTECTED BY THE FRAME**

## OPTIONAL

### 3 BOLTED-IN ADAPTER PLATE

CAN BE USED FOR ANY MAKE OR MODEL OF HAMMER AND ALLOWS ATTACHMENT TO THE MACHINE WITH FIXED ATTACHMENT OR QUICK COUPLER

**SM53 3,0 4,0 t (6613 - 8818 lb)**



AR40  
CR40  
CS30  
CS30 JANUS  
PL40 PIN LOCK  
CW05 AUTO'LOCK  
S  
CM

**SM62 4,0 - 5,0 t (8818 - 11023 lb)**



AR50  
CR50  
CS30  
CS30 JANUS  
PL60 PIN LOCK  
CW10 AUTO'LOCK  
S  
CM

**SM67 5,0 - 6,0 t (11023 - 13228 lb)**



AR50  
CR50  
CS30  
CS30 JANUS  
PL60 PIN LOCK  
CW10 AUTO'LOCK  
S  
CM

**SM67 6,0 - 7,5 t (13228 - 16535 lb)**



AR70  
CR70  
CS80  
CS80 JANUS  
PL80 PIN LOCK  
CW10 AUTO'LOCK  
S  
CM

**SM73 7,5 - 10,0 t (16535 - 22046 lb)**



CR70  
CS80  
CS80 JANUS  
PL10 PIN LOCK  
CW10 AUTO'LOCK  
S  
CM  
CW20S/30S

**SM80 10,0 - 12,0 t (22046 - 26456 lb)**



CR70  
CS80  
CS80 JANUS  
PL10 PIN LOCK  
CW10 AUTO'LOCK  
S  
CM  
CW20S/30S

\*\*FOR MACHINES WEIGHING MORE THAN 12 TONS IT IS POSSIBLE TO REQUEST A QUOTE, OTHERWISE THE EQUIPMENT WILL BE SUPPLIED WITHOUT ATTACHMENT.