




PATENTED



NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

THE PATENTED SEMI-AUTOMATIC CW AUT'O'LOCK QUICK COUPLER ENABLES THE FAST LOCKING AND UNLOCKING OF THE ATTACHMENTS, CONSIDERABLY REDUCING THE TIME FOR THEIR REPLACEMENT. IT IS PROVIDED WITH A SEMI-AUTOMATIC SYSTEM THAT REQUIRES THE MANUAL INTERVENTION WHEN THE TOOL HAS TO BE RELEASED. BOTH THE LOCKING AND THE SAFE BLOCKING OF THE NEW TOOL ARE AUTOMATICALLY OPERATED.

SEMI-AUTOMATIC

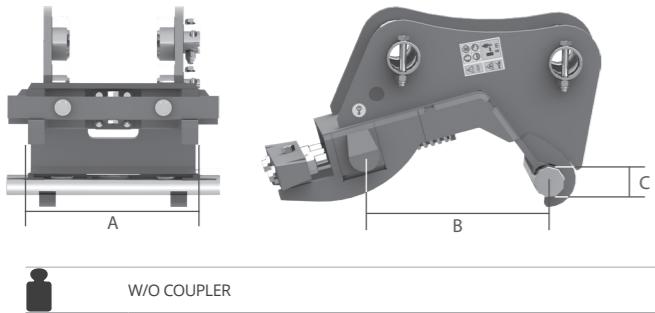

TONS (LB)	0,6 - 4,0 (1323 - 8818)	4,0 - 10,0 (8818 - 22046)
MOD.	CW05 S.A.	CW10 S.A.
A MM (IN)	175 (6,9)	305 (12)
B MM (IN)	200 (7,9)	300 (11,9)
C MM (IN)	40 (1,6)	50 (2)
W/O COUPLER	KG (LB)	KG (LB)
	24 (53)	74 (163)



OPTIONAL

1 LIFTING HOOK

UPON REQUEST, A LOADING HOOK WILL BE FITTED, COVERED WITH AN APPROVAL ON THE CONFORMITY DECLARATION OF OUR PRODUCT.

NB* THE LIFTING CAPACITY OF THE HOOK IS ADJUSTED ACCORDING TO THE SUPPORT TO WHICH THE HOOK IS APPLIED. THIS CAPACITY IS INDICATED IN THE PRODUCT'S OWNER'S MANUAL.

2 CW ON HINGE

RECOMMENDED APPLICATION ON BUCKETS.

3 CW FOR TILTING BUCKETS

RECOMMENDED APPLICATIONS ON TILTING BUCKETS.

4 REVERSE CW

RECOMMENDED APPLICATION ON FLAT PLATES, SUCH AS ADAPTER PLATES, MULCHERS, SHEARS, ETC.