



LN STANDARD SNOW BLADE



SKID LOADER

MINI SKID

WHEEL LOADER


BACKHOE LOADER

TELEHANDLER


TRACTOR



EQUIPPED WITH ANTI-SHOCK VALVES. HYDRAULIC ANGLE ADJUSTMENT OF ± 30°, SELF-LEVELLING TO THE ROAD OF ± 10° AND ADJUSTABLE SHOES. ENTIRE MOLDBOARD OVERTURNING IN CASE OF COLLISION AND SPRING RETURN.



		MOD.	LN 130	LN 160	LN 185	LN 210	LN 250	LN 250HD	LN 270HD	LN 290HD	LN 310HD	
		A	MM (IN)	1305 (51)	1605 (63)	1855 (73)	2105 (83)	2505 (99)	2505 (99)	2705 (106)	2905 (114)	3105 (122)
		B	MM (IN)	810 (32)	810 (32)	810 (32)	810 (32)	810 (32)	740 (29)	740 (29)	740 (29)	740 (29)
		C	MM (IN)	700 (28)	700 (28)	700 (28)	700 (28)	700 (28)	900 (35)	900 (35)	900 (35)	900 (35)
WIDTH AT 15°		MM (IN)	1125 (44)	1385 (55)	1605 (63)	1820 (72)	2165 (85)	2165 (85)	2350 (93)	2510 (99)	2690 (106)	
	W/O COUPLER	KG (LB)	285 (628)	300 (661)	315 (694)	330 (728)	355 (783)	665 (1466)	685 (1510)	700 (1543)	720 (1587)	
	MAX.	BAR (PSI)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	280 (4062)	

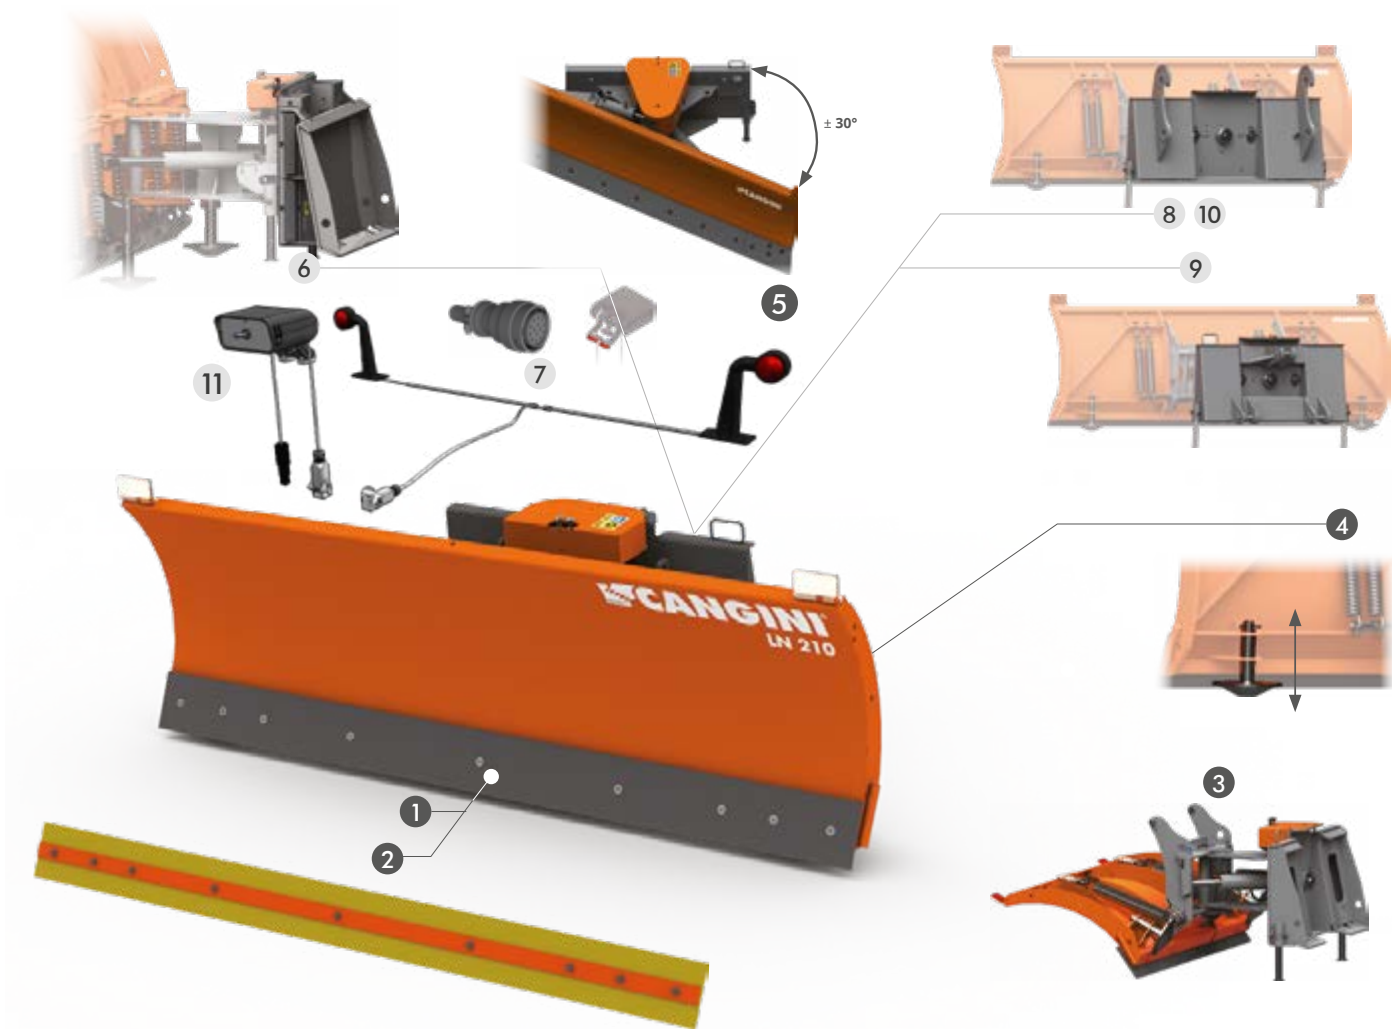

STANDARD TECHNICAL FEATURES

- 1 **INTERCHANGEABLE REVERSIBLE BLADE.**
BOLTED-IN REVERSIBLE HB400 BLADE.
- 2 **POLYURETHANE BLADE**
SUITABLE FOR SURFACES THAT OTHERWISE MIGHT BE DAMAGED.
- 3 **MOLDBOARD OVERTURNING AND SPRING RETURN**
IN CASE OF A SHOCK THE ENTIRE MOLDBOARD OVERTURNS THUS ALLOWING TO OVERCOME THE OBSTACLE.
- 4 **ADJUSTABLE SHOES**
THE HEIGHT BETWEEN THE BLADE AND THE GROUND SURFACE CAN BE ADJUSTED.
- 5 **ANGLE SIDE HYDRAULIC TILTING ADJUSTMENT OF ± 30°**
HYDRAULIC ADJUSTMENT UP TO MAX. ± 30° OF THE BLADE HORIZONTAL TILTING ANGLE ON BOTH SIDES.

NB : THE EQUIPMENT IS SUPPLIED COMPLETE WITH PIPES AND STANDARD CONNECTIONS

OPTIONAL

- 6 **COMPACT FLOATING SYSTEM**
IT ENABLES THE BLADE TO FOLLOW THE FEATHER-EDGE WITHOUT MANUAL ADJUSTMENT OF ITS POSITION.
- 7 **OVERALL BLADE WIDTH LIGHT KIT**
THE SIDE DIMENSIONS OF THE BLADE ARE VISUALLY PERCEIVED. THE SYSTEM IS SUPPLIED WITH MULTI-PIN SOCKET.*
- 8 **COUPLING SYSTEM FOR WHEEL LOADERS, BACKHOE LOADERS AND TELEHANDLERS**
- 9 **3-POINT LINKAGE**
- 10 **ARTICULATED LOADERS HITCH**
IT'S POSSIBLE TO ADD THE HITCH FOR ARTICULATED LOADERS TO THE SKID LOADER HITCH PROVIDED WITH THE STANDARD EQUIPMENT
- 11 **ELECTRIC KIT**
EQUIPPED WITH A CIGARETTE LIGHTER SOCKET (12 VOLTS)

*THE PLUG IS SUPPLIED DISASSEMBLED IF NO WIRING INFORMATION IS PROVIDED. CHECK THAT THE BASIC MACHINE IS EQUIPPED WITH A 14/8-PIN MULTI-PIN SOCKET. IF NOT, THE ELECTRICAL KIT (OPTIONAL 11) MUST BE REQUESTED.