




R EASY SWEEPY  
FRONT ROLLER




NB: AT THE TIME OF ORDER, PLEASE NOTIFY THE VOLTAGE OF THE ELECTRICAL SYSTEM (12-24 V)

IT IS PERFECT FOR THE MAINTENANCE AND CLEANING OF OPEN SURFACES, FLOORS, INDUSTRIAL HALLS AND STREETS THAT REQUIRE A HIGH-LEVEL CLEANING.

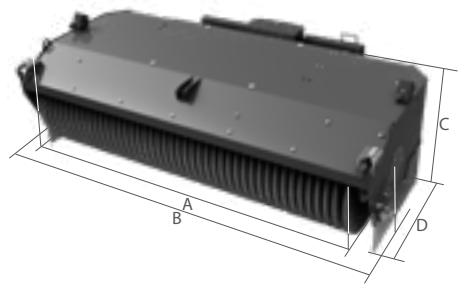

		MOD.	EASY SWEEPY R160	EASY SWEEPY R180	EASY SWEEPY R210	EASY SWEEPY R230
	A	MM (IN)	1600 (62,99)	1800 (70,86)	2100 (82,67)	2300 (90,55)
	B	MM (IN)	1850 (72,83)	2050 (80,70)	2350 (92,51)	2550 (100,39)
	C	MM (IN)	800 (31,4)	800 (31,4)	800 (31,4)	800 (31,4)
	D	MM (IN)	1300 (51,18)	1300 (51,18)	1300 (51,18)	1300 (51,18)
	W/O COUPLER	KG (LB)	330 (727,52)	350 (771,61)	375 (826,73)	395 (870,82)
		MM (IN)	600 (23,62)	600 (23,62)	600 (23,62)	600 (23,62)
		N.	32 + 2	37 + 2	43 + 2	48 + 2
	MAX.	L/MIN (GAL/MIN)	70 (18,49)	70 (18,49)	70 (18,49)	70 (18,49)
	MAX.	BAR (PSI)	250 (3625,94)	250 (3625,94)	250 (3625,94)	250 (3625,94)

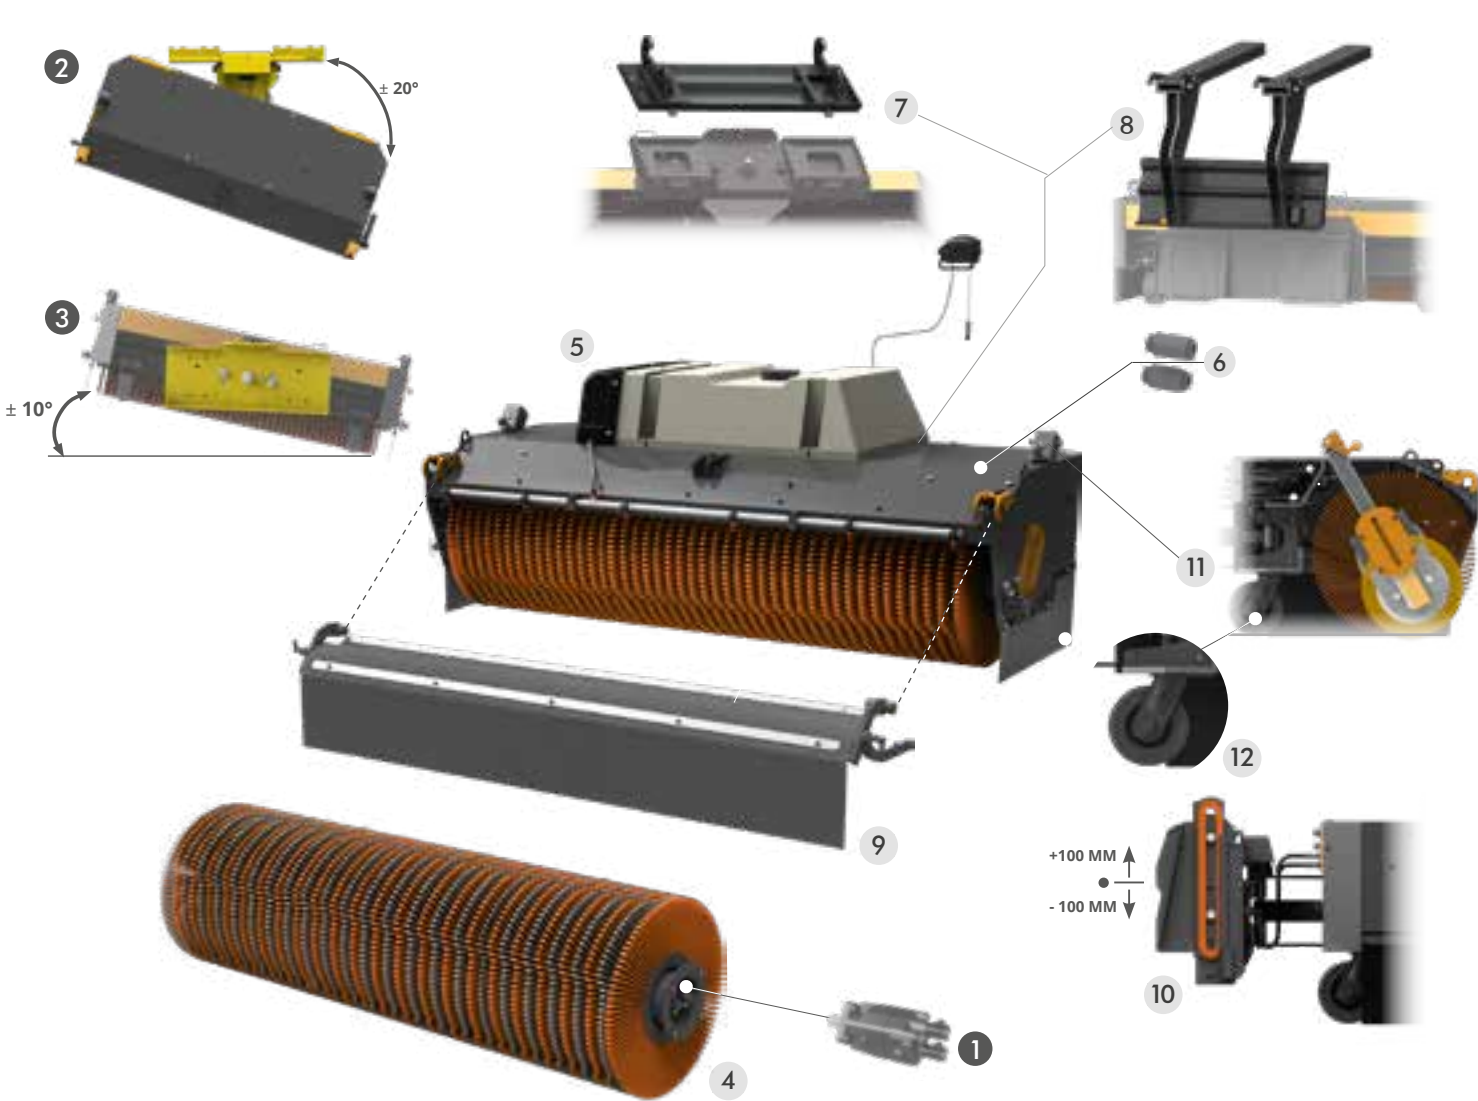

STANDARD TECHNICAL FEATURES

- 1 **ENGINE WITH SQUARE FLANGES AND DISK GEARBOX**  
SHAFT WITH INTEGRATED ENGINE
- 2 **ANGLE SIDE HYDRAULIC TILTING ADJUSTMENT OF ± 20°**  
IT ALLOWS THE HYDRAULIC ADJUSTMENT OF THE TILTING ANGLE UP TO A MAX. OF +/-20° ON EACH SIDE.
- 3 **TILT – HORIZONTAL MECHANICAL TILTING ADJUSTMENT OF ±10°**  
IT ALLOWS THE MECHANICAL ADJUSTMENT OF THE WORKING PLANE TILTING ANGLE UP TO A MAX. OF +/- 10° ON EACH SIDE.

OPTIONAL

- 4 **PPL+STEEL BRUSH KIT**  
RECOMMENDED FOR THE CLEANING OF PARTICULARLY ABRASIVE SURFACES.
- 5 **DUST-CONTROL SYSTEM WITH TANK AND PUMP**  
PRESSURIZED WATER SYSTEM WITH TANK FOR THE CONTROL OF DUSTS PRODUCED DURING THE WORKING CYCLE. SPRINKLERS ARE POSITIONED INSIDE AND OUTSIDE THE SWEEPER.
- 6 **FLOWRATE REDUCERS**  
MANDATORY ON HIGHFLOW MACHINES OR WITH OILRATE HIGHER THAN 70 L/MIN.
- 7 **ARTICULATED LOADERS, BACKHOE LOADERS AND TELEHANDLER HANDLERS HITCH**
- 8 **COUPLING FRAME FOR FORKS**
- 9 **FRONT PROTECTION SKIRT**
- 10 **COMPACT FLOATING SYSTEM 200 MM**  
IT ALLOWS THE SWEEPER TO FOLLOW THE GROUND AND BETTER THE FINAL RESULT. DESIGNED FOR MACHINES SUCH AS LOADERS AND TELESCOPIC LOADERS.
- 11 **ROLLER PRESSURE ADJUSTMENT SYSTEM**  
MANDATORY APPLICATION IN COMBINATION WITH COMPACT FLOATING SYSTEM
- 12 **WHEELS KIT**  
SUPPORTING WHEELS MANDATORY APPLICATION IN COMBINATION WITH COMPACT FLOATING SYSTEM